


Frontal Impact

 Note that sensor orientation is different for side impact configurations.
 ISO Codes used must reflect the chosen orientation.

Left-hand side impact: CHST LE 00 Q6 DS Y and CHST LE 00 Q6 VO Y.
 Right-hand side impact: CHST RI 00 Q6 DS Y and CHST RI 00 Q6 VO Y..

Note that the IR-TRACC device fitted to this dummy records a voltage.
 It is more normal to exchange the displacement channel.

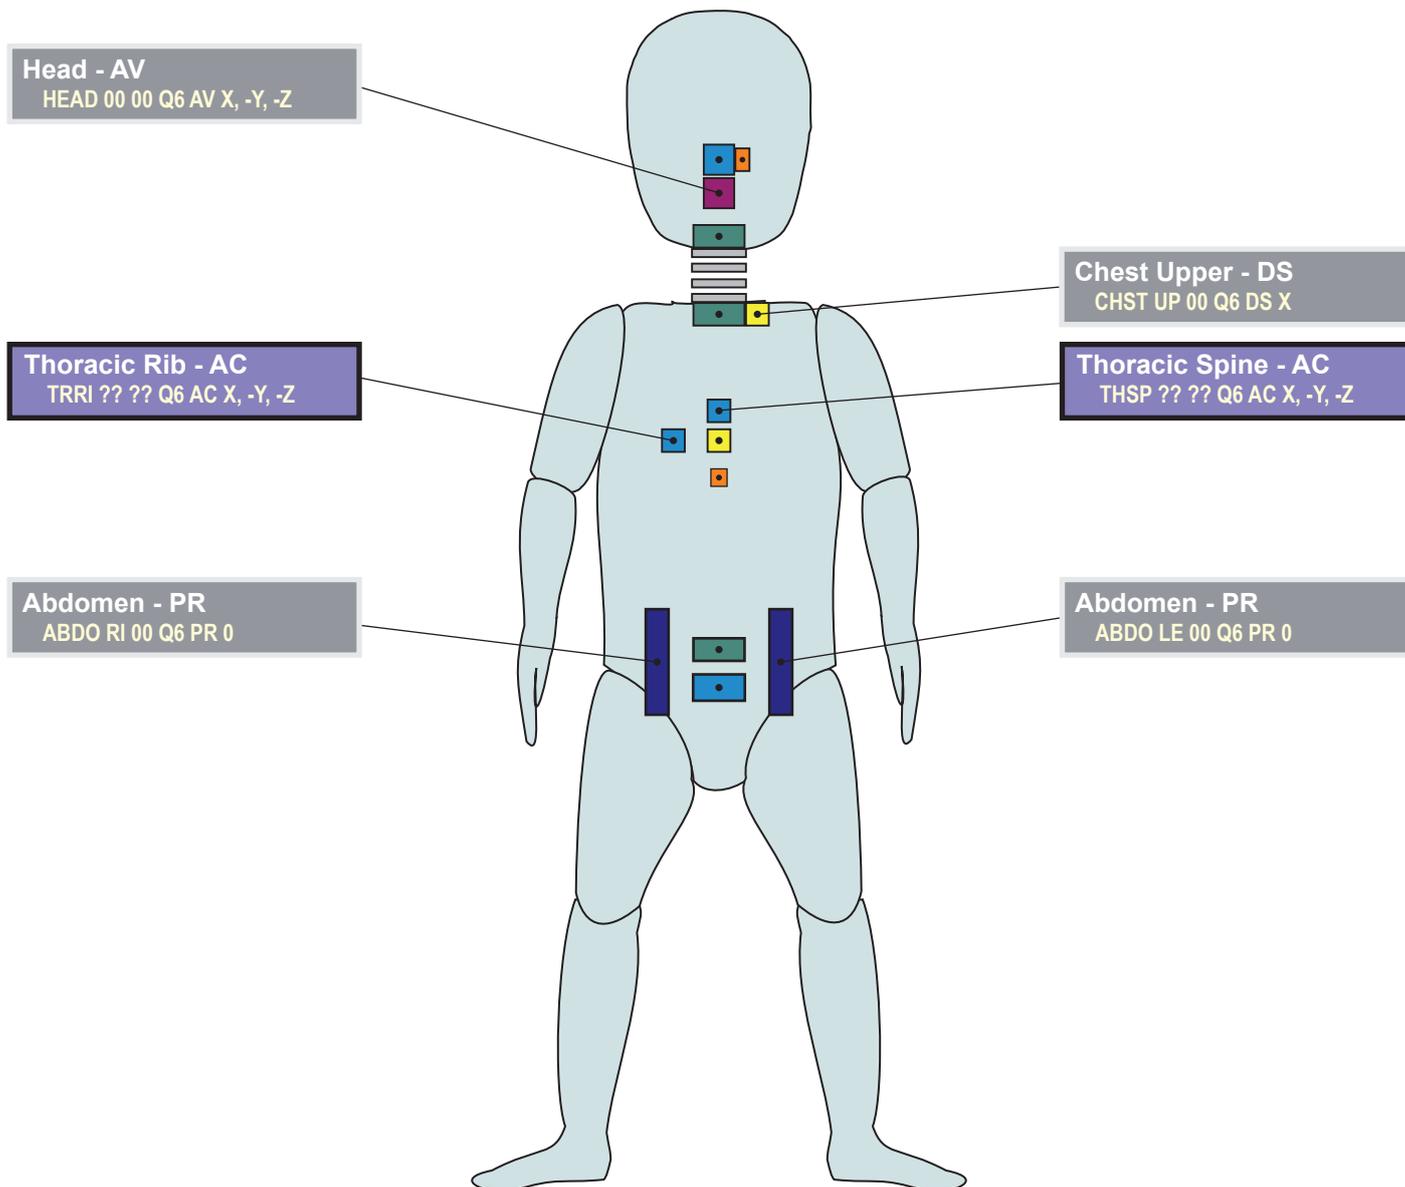

 Note that sensor locations are not fixed: transducers are taped in position as required. ISO Codes used must reflect the chosen position. FL1 should reflect the side, LE or RI, for these channels, if used.

