

THOR 50th Percentile Male (THOR-50M)

Qualification Procedures Manual

AUGUST 2016



This manual includes content provided under contracts DTNH22-13-D-00269 (Transportation Research Center, Inc.), DTNH22-99-C-07007 (GESAC, Inc.) and DTNH22-07-00070 (Humanetics Innovative Solutions, Inc.) administered by the National Highway Traffic Safety Administration, U.S. Department of Transportation.

THOR-50M QUALIFICATION PROCEDURES MANUAL

TABLE OF CONTENTS

1	INTRODUCTION	5
2	GENERAL DATA COLLECTION GUIDELINES	8
2.1	Sign conventions	8
2.2	Signal conditioning	8
2.3	Naming conventions.....	8
2.4	Impact Force Calculation	9
3	ATD ADJUSTMENT	10
3.1	Lumbar Spine Pitch Change Mechanism	10
3.2	Neck Pitch Change Mechanism	12
3.3	Arm and Shoulder Joint Torque Settings	13
3.4	Ankle Rotary Potentiometer Zeroing Procedure.....	19
3.5	Achilles Cable Adjustment Procedure	23
4	HEAD QUALIFICATION	27
4.1	Description	27
4.2	Materials.....	27
4.3	Instrumentation.....	27
4.4	Pre-Test Procedures.....	27
4.5	Test Procedure.....	28
4.6	Data Processing.....	32
4.7	Performance Specification	33
5	FACE QUALIFICATION	34
5.1	Description	34
5.2	Materials.....	34
5.3	Instrumentation.....	34
5.4	Pre-Test Procedures.....	34
5.5	Test Procedure.....	35
5.6	Data Processing.....	39
5.7	Performance Specifications.....	40
6	NECK QUALIFICATION.....	41
6.1	Summary	41
6.2	Description	41
6.3	Materials.....	41
6.4	Instrumentation.....	43
6.5	Pre-Test Neck Setup Procedure.....	43
6.6	Neck Torsion Test	48
6.7	Neck Frontal Flexion Test.....	61
6.8	Neck Extension Test.....	65
6.9	Neck Lateral Flexion Test.....	69
7	UPPER THORAX QUALIFICATION	73
7.1	Description	73

7.2	Materials.....	73
7.3	Instrumentation.....	73
7.4	Pre-Test Procedures.....	74
7.5	Test Procedure.....	74
7.6	Data Processing.....	77
7.7	Performance Specifications.....	78
8	LOWER THORAX QUALIFICATION.....	79
8.1	Description	79
8.2	Materials.....	79
8.3	Instrumentation.....	79
8.4	Pre-Test Procedures.....	80
8.5	Test Procedure.....	80
8.6	Data Processing	84
8.7	Performance Specifications.....	84
9	ABDOMEN QUALIFICATION	85
9.1	Description	85
9.2	Materials.....	85
9.3	Instrumentation.....	86
9.4	Pre-Test Procedures.....	86
9.5	Test Procedure.....	86
9.6	Data Processing	90
9.7	Performance Specifications.....	91
10	UPPER LEG QUALIFICATION	92
10.1	Description	92
10.2	Materials.....	92
10.3	Instrumentation.....	92
10.4	Pre-Test Procedures.....	92
10.5	Test Procedure.....	93
10.6	Data Processing	97
10.7	Performance Specifications.....	98
11	KNEE QUALIFICATION.....	99
11.1	Description	99
11.2	Materials.....	99
11.3	Instrumentation.....	99
11.4	Pre-Test Procedures.....	99
11.5	Test Procedure.....	100
11.6	Data Processing	102
11.7	Performance Specifications.....	103
12	ANKLE INVERSION AND EVERSION QUALIFICATION	104
12.1	Description	104
12.2	Materials.....	104
12.3	Instrumentation.....	104
12.4	Pre-Test Procedures.....	105
12.5	Test Procedure.....	105
12.6	Data Processing	113

12.7	Performance Specifications.....	114
13	BALL OF FOOT QUALIFICATION	115
13.1	Description	115
13.2	Materials.....	115
13.3	Instrumentation.....	115
13.4	Pre-Test Procedures.....	116
13.5	Test Procedure.....	116
13.6	Data Processing.....	118
13.7	Performance Specifications.....	118
14	HEEL QUALIFICATION	119
14.1	Description	119
14.2	Materials.....	119
14.3	Instrumentation.....	119
14.4	Pre-Test Procedures.....	119
14.5	Test Procedure.....	120
14.6	Data Processing.....	125
14.7	Performance Specifications.....	126
APPENDIX A.	TEST FIXTURES.....	127
APPENDIX B.	SOURCE DATA FOR PERFORMANCE REQUIREMENTS	134
APPENDIX C.	CHANGE LOG.....	136

THOR-50M QUALIFICATION PROCEDURES MANUAL

1 INTRODUCTION

This manual describes the qualification procedures for the NHTSA advanced frontal 50th percentile male anthropomorphic (ATD) known as the **Test Device for Human Occupant Restraint**, referred to as THOR-50M throughout this manual. The intent of this manual is to define the performance characteristics of a THOR-50M built to meet the 2014-09-29 drawing package released through the NHTSA website¹. This manual supersedes the THOR-NT Certification Manual Revision 2005.2², and it should be noted that some of the requirements have been updated based on changes made during the Mod Kit project³. These qualification tests ensure that the components are functioning properly, and are also intended to monitor the response of components that may have a tendency to deteriorate over time.

These qualification procedures are simplified versions of biofidelity tests, relaxing the need for specialized instrumentation or test equipment. These tests are configured to use internal instrumentation to evaluate both the instrumentation and the response of the ATD. These qualification tests are to be carried out on each THOR ATD to ensure agreement with the design specification before use to ensure repeatable and reproducible crash testing. The frequency of qualification depends on the application; for reference, both compliance and consumer information test programs administered by NHTSA require ATD qualification before each vehicle crash test.

The performance specifications for the qualification tests were determined during a repeatability and reproducibility study consisting of five tests in each mode for three THOR-50M ATDs (serial numbers DL9207, DO9798, and DO9799), which were built to the THOR-50M Drawing Package¹ (August 2016 version - Docket # NHTSA-2015-0119). Each of the three dummies were tested at NHTSA's Vehicle Research and Test Center. In addition, DO9799 was tested under contract at two other laboratories (Humanetics Innovative Solutions; Calspan Corporation), providing five sets of data for generating the performance requirements (unless noted otherwise within the procedure). All of the test data can be located in the NHTSA Biomechanics Database using the reference in APPENDIX B. Unless otherwise specified, the performance requirements were calculated using the mean plus or minus two standard deviations or plus or minus 10%, whichever is smaller, of the peaks for the specified measured or calculated channels. These performance requirements may be updated once additional data are available from other dummies and other test laboratories.

¹ <http://www.nhtsa.gov/Research/Biomechanics+&+Trauma/THOR+50th+Male+ATD>

² National Highway Traffic Safety Administration, "THOR Certification Manual, Revision 2005.2," Report No: GESAC-05-04, U.S. Department of Transportation, Washington, DC, March 2005.

³ Ridella, S., Parent, D., "Modifications to Improve the Durability, Usability, and Biofidelity of the THOR-NT Dummy," 22nd ESV Conference, Paper No. 11-0312, 2011.

While not always feasible, an attempt was made to measure each instrument used in the calculation of injury criteria and to assess the performance at a severity level similar to that experienced during a vehicle crash test. The set of injury criteria considered to meet this objective are those used in the assessment of THOR-50M response in the oblique moving deformable barrier test mode⁴.

The recommended order of operations is shown in Figure 1-1. First, the component tests are carried out on the sub-assemblies (head/neck assembly, knee assembly, and lower leg assembly). If resources allow, these tests can be carried out in parallel. After the component tests are completed, the full dummy is assembled and the full body qualification tests are conducted. Alternatively (Figure 1-2), neck and full dummy qualification tests can be carried out in parallel with the lower extremity qualification tests by using an alternate pair of lower legs (either THOR or Hybrid III lower legs can be used), then the qualified THOR lower legs can be installed once both groups of tests are complete. Note that in this alternative arrangement, the neck qualification tests would still need to be carried out first to allow proper adjustment of the neck spring cables.

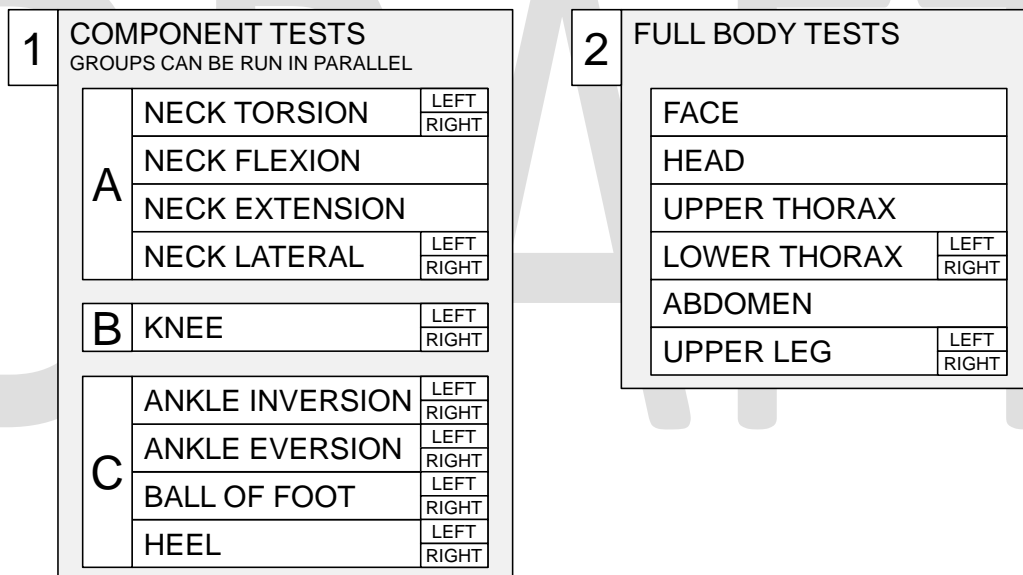


Figure 1-1. Recommended order of operations for qualification procedures

⁴ Saunders, J., Parent, D., Ames, E., "NHTSA Oblique Crash Test Results: Vehicle Performance and Occupant Injury Risk Assessment in Vehicles with Small Overlap Countermeasures," 24th ESV Conference, Paper No. 15-0108, 2015.

A	UPPER BODY TESTS		
	1	NECK TORSION	LEFT RIGHT
		NECK FLEXION	
		NECK EXTENSION	
		NECK LATERAL	LEFT RIGHT
	2	FACE	
		HEAD	
		UPPER THORAX	
		LOWER THORAX	LEFT RIGHT
		ABDOMEN	
		UPPER LEG	LEFT RIGHT
B	LOWER LEG TESTS		
	KNEE	LEFT RIGHT	
	ANKLE INVERSION	LEFT RIGHT	
	ANKLE EVERSION	LEFT RIGHT	
	BALL OF FOOT	LEFT RIGHT	
	HEEL	LEFT RIGHT	

Figure 1-2. Alternative order of operations for qualification procedures

Table 1-1. Qualification Test Matrix

Body Region	Test	Impact Velocity m/s [± 0.05 m/s]	Impactor Mass kg [± 0.02 kg]	Impactor Face mm [± 0.25 mm]
Head	Head Impact Test	2.00	23.36	152.4 disk
	Face Impact Test	6.73	13.0	152.4 disk
Neck	Neck Left Torsion	5.00	Neck Pendulum	
	Neck Right Torsion	5.00		
	Neck Frontal Flexion	5.00		
	Neck Frontal Extension	5.00		
	Neck Left Lateral Flexion	3.40		
	Neck Right Lateral Flexion	3.40		
Thorax	Upper Thorax Impact	4.30	23.36	152.4 disk
	Left Thorax Impact	4.30	23.36	152.4 disk
	Right Thorax Impact	4.30	23.36	152.4 disk
Abdomen	Abdomen Impact	3.30	32.0	177.8 x 50.8 Rectangular Bar
Femur/Knee	Left Upper Leg Impact	2.60	5.00	76.2 disk
	Right Upper Leg Impact	2.60	5.00	76.2 disk
	Left Knee Impact	2.20	12.00	76.2 disk
	Right Knee Impact	2.20	12.00	76.2 disk
Lower Extremity	Left Ankle Inversion	2.00 ± 0.10 m/s	NHTSA Dynamic Impactor	
	Right Ankle Inversion	2.00 ± 0.10 m/s		
	Left Ankle Eversion	2.00 ± 0.10 m/s		
	Right Ankle Eversion	2.00 ± 0.10 m/s		
	Left Ball of Foot Impact	5.00 ± 0.10 m/s		
	Right Ball of Foot Impact	5.00 ± 0.10 m/s		
	Left Heel Impact	4.00 ± 0.10 m/s		
	Right Heel Impact	4.00 ± 0.10 m/s		

2 GENERAL DATA COLLECTION GUIDELINES

2.1 Sign conventions

The sign conventions in this manual are intended to conform to the requirements of SAE Recommended Practice J211-1⁵. For polarity information specific to the THOR ATD, see the THOR User's Manual.

2.2 Signal conditioning

This manual specifies filtering of data channels using Channel Frequency Class (CFC) definitions. For more information on the required filter definitions, please see Appendix C of the March 2014 update to SAE J211-1.

Filter classes were selected using the following hierarchy: first, if the given sensor requires a filter class due to its mechanical or electrical specifications, follow recommendations from the manufacturer; otherwise, if the given sensor is also recorded in a similar qualification test for the Part 572 Subpart E 50th percentile male ATD, follow the sensor specifications in 49 CFR 572.36; otherwise, follow the recommendations provided in SAE J211-1.

2.3 Naming conventions

To facilitate interoperability, the ISO-MME channel code naming convention is recommended. For each test, the recommended channel names for the measured and calculated channels are described in both the ISO-MME (based on the 2015-04-15 proposed codes⁶) and NHTSA Entrée Version 5 naming conventions. For a complete list of recommended THOR channel codes, see the THOR User's Manual⁷. This resource also contains information useful for preparing test data in the NHTSA Entrée Version 5 (EV5) format.

⁵ SAE J211-1: Instrumentation for Impact Test, Part 1, Electronic Instrumentation, SAE Surface Vehicle Recommended Practice, March 31, 2014.

⁶ <http://www.iso-mme.org/forum/download/file.php?id=809>

⁷ National Highway Traffic Safety Administration, "THOR User's Manual," Report in Progress, U.S. Department of Transportation, Washington, DC, 2015.

2.4 Impact Force Calculation

In many of the test procedures, the response to be evaluated requires calculation of impact force at the contact interface. This can be measured in either of two ways:

- 2.4.1 With a single linear accelerometer along the line of impact. In this case, impact force is calculated using the following equation:

$$F_i(t) = m_i \cdot a_i(t)$$

where

$$F_i(t) = \text{calculated force time-history at contact interface}$$

$$m_i = \text{mass of the impactor}$$

$$a_i(t) = \text{measured acceleration time-history of impactor}$$

- 2.4.2 With an in-line load cell measuring axial force and a linear accelerometer along the line of impact. In this case, the mass in front of the load cell, including half the load cell mass, must be measured or calculated to determine the inertial correction to the load cell reading. The impact force is calculated using the following equation:

$$F_i(t) = -F_{LC}(t) + m_f \cdot a_i(t)$$

where

$$F_i(t) = \text{calculated force time-history at contact interface}$$

$$F_{LC}(t) = \text{measured impactor load cell force time-history}$$

$$m_f = \text{mass in front of the load cell}$$

$$a_i(t) = \text{measured acceleration time-history of impactor}$$

3 ATD ADJUSTMENT

3.1 Lumbar Spine Pitch Change Mechanism

The lumbar spine pitch change mechanism connects the upper (thoracic) and lower (lumbar) spine segments. It allows adjustment of the spine angle in 3 degree increments. There are four settings marked on the lumbar spine pitch change assembly (472-3670), representing erect, neutral, slouched, and super-slouched postures. The default posture is the slouched posture, as this most closely resembles the Anthropometry of Motor Vehicle Occupants (AMVO)⁸ seated posture for a 50th percentile male occupant.

To adjust the lumbar spine pitch change mechanism angle, follow the steps below.

- 3.1.1 Unzip the zippers on the right shoulder and the right side of the jacket. If desired or convenient, remove the jacket completely.
- 3.1.2 Locate the M12 x 1.75 x 60 mm SHCS on the right side of the lower spine, as indicated in Figure 3-1.

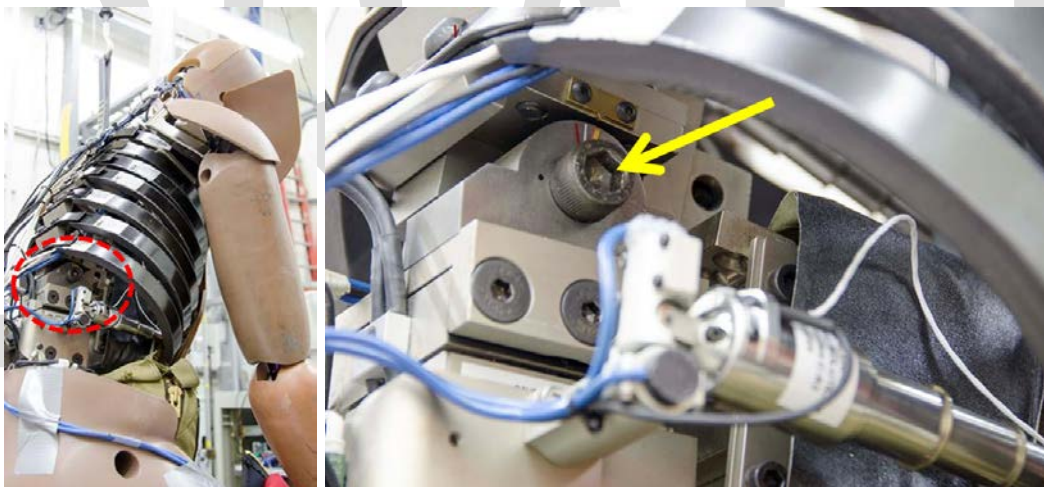


Figure 3-1. Lumbar spine pitch change mechanism adjustment SHCS (M12)

- 3.1.3 Loosen the M12 x 1.75 x 60 mm SHCS at least two complete turns (720 degrees) to disengage the sprockets.
- 3.1.4 Manipulate the upper portion of the spine to achieve the desired posture setting, as shown in Figure 3-2 and Figure 3-3.

⁸ Schneider, L.W., Robbins, D.H., Pflug, M.A., Snyder, R. G., "Development of Anthropometrically Based Design Specifications for an Advanced Adult Anthropomorphic Dummy Family; Volume 1-Procedures, Summary Findings and Appendices, "U.S. Department of Transportation, DOT-HS-806-715, 1985.

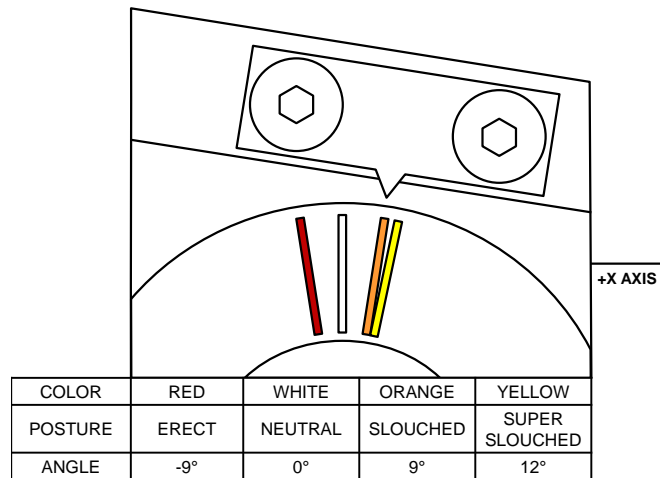


Figure 3-2. Lumbar spine pitch change assembly (472-3670) posture settings. Diagram indicates the “slouched” position

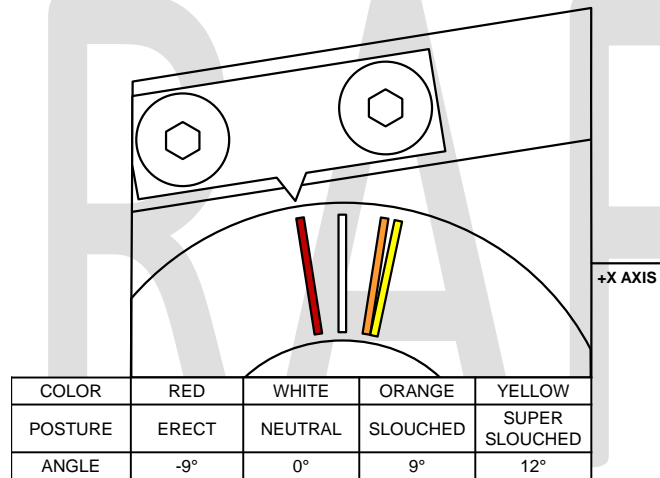


Figure 3-3. Lumbar spine pitch change assembly (472-3670) posture settings. Diagram indicates the “erect” position

3.1.5 Re-tighten the M12 x 1.75 x 60 mm SHCS and torque to 68.0 N-m (50.5 ft-lbf).

3.2 Neck Pitch Change Mechanism

The neck pitch change mechanism connects the lower neck load cell to the upper thoracic spinebox (472-3620). It allows adjustment of the angle of the base of the neck in 3 degree increments. There are two scribe lines marked on the right sprocket, which rotates with the neck, and one scribe line settings marked on left sprocket, which is fixed to the upper thoracic spine. A neutral setting is achieved by aligning the fixed scribe line with the inferior scribe line on the right sprocket, as shown in Figure 3-4. The default posture is the neutral setting, which most closely resembles the AMVO seated posture for a 50th percentile male occupant.

To adjust the angle of the neck pitch change mechanism, follow the steps below.

- 3.2.1 Unzip the zippers on the right shoulder and the right side of the jacket. If desired or convenient, remove the jacket completely.
- 3.2.2 Locate the M10 x 1.5 x 55 mm SHCS on the right side of the upper thoracic spine, as indicated in Figure 3-4. If the dummy is fully assembled, the SHCS can be accessed by inserting an M10 T-handle between ribs #2 and #3, through the access hole in the upper thoracic spinebox, and into the head of the adjustment bolt (Figure 3-5, left).

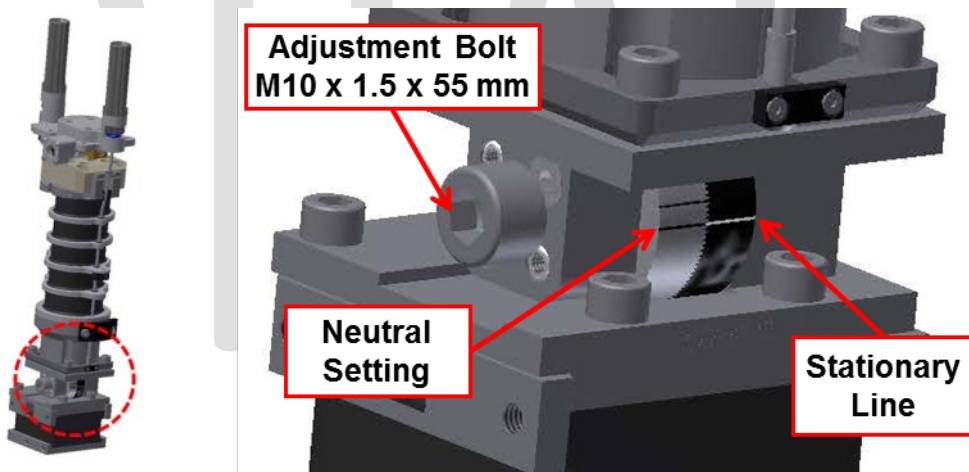


Figure 3-4. Neck pitch change assembly (472-3630) posture setting. Diagram shows neck in “neutral” position.

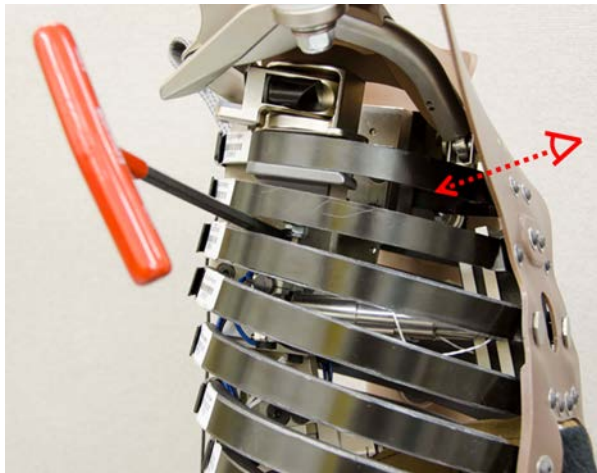


Figure 3-5. Access to the neck pitch change mechanism through the upper thoracic spinebox.



Figure 3-6. View of neck pitch change joint scribe lines through ribcage

- 3.2.3 Unscrew the M10 x 1.5 x 55 mm SHCS bolt at least two complete turns (720 degrees) to disengage the sprockets.
- 3.2.4 Manipulate the neck to achieve the desired posture setting. The default position (“neutral” as shown in Figure 3-4 right and Figure 3-6) is achieved by aligning the lower/inferior scribe line on the sprocket attached to the neck with the scribe line on the fixed sprocket. If the dummy is fully-assembled, the scribed lines can be viewed by looking between ribs #1 and #2 from the front of the dummy (see direction indicated in Figure 3-5 and expected view in Figure 3-6).
- 3.2.5 Re-tighten the M10 x 1.5 x 55 mm SHCS and torque to 50.8 N-m (37.5 ft-lbf).

3.3 Arm and Shoulder Joint Torque Settings

- 3.3.1 Position the left hand as shown in Figure 3-7. Adjust the torque of the M12 x 1.75 x 30 mm SHCS at the wrist joint such that the hand remains in this position under its own mass but falls once any additional mass or force is added. Repeat for right hand.



Figure 3-7. Wrist orientation for setting joint torque to 1G

- 3.3.2 Position the left lower arm as shown in Figure 3-8. Adjust the torque of the M12 x 30 mm SHSS at the elbow joint such that the lower arm remains in this position under its own mass but falls once any additional mass or force is added. Repeat for right elbow.



Figure 3-8. Elbow orientation for setting joint torque to 1G

- 3.3.3 Disconnect both clavicles at the shoulder by removing the modified M8 bolt (472-3891; Figure 3-9). Do not remove the cable ties which hold the shoulder pad to the clavicle.

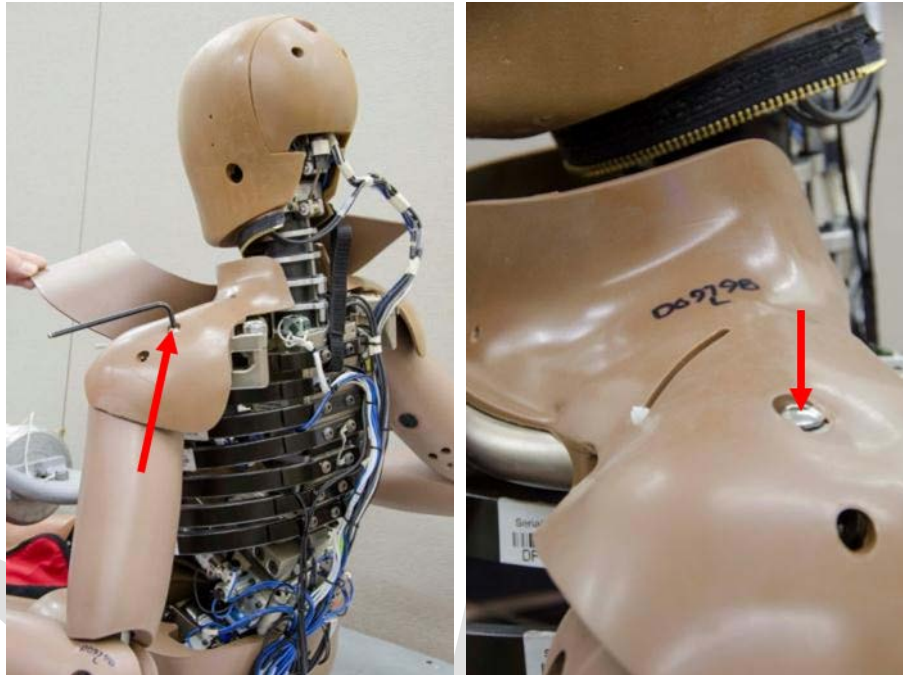


Figure 3-9. Disconnect both left and right clavicles at shoulders (shoulder pad cable ties may be left intact)

- 3.3.4 Locate the M10 x 20mm SHSS attaching the left upper humerus assembly (472-6200) to the arm clevis (472-3831). This screw may be located through either the anterior or posterior hole in the upper arm flesh (472-6270), as indicated in Figure 3-10. With the elbow bent at 90° as shown in Figure 3-8, rotate upper arm about the X-axis shoulder joint until the arm is in the horizontal plane. Adjust the torque of the M10 bolt such that the arm remains in this position under its own mass but falls once any additional mass or force is added. Repeat for right arm.

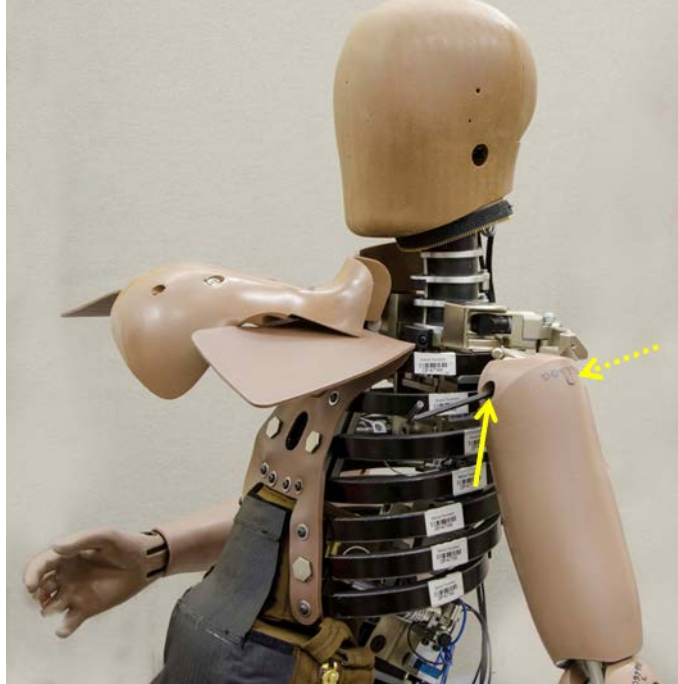


Figure 3-10. Upper arm orientation for setting joint torque about shoulder X-axis to 1G

- 3.3.5 Set the torque on the M8 locknut connecting the left shoulder support assembly (472-3813) to the left arm link (472-3829) to 15 N-m (Figure 3-11). Repeat for right arm.



Figure 3-11. Locknut on joint connecting shoulder support assembly to arm link.

- 3.3.6 Locate the M12 x 1.75 mm locknut at the medial aspect of the left arm clevis assembly (472-3831), indicated by arrow in Figure 3-12. Straighten the elbow, extend the arm fully forward in the horizontal plane, and rotate the lower arm about the global X-axis to prevent bending at the elbow joint. Adjust the torque on the M12 nut such that the arm remains in this position under its own mass but falls once any additional mass or force is added. If this cannot be achieved, inspect the tabbed washer (472-3838) and replace if damaged. Repeat for right arm.

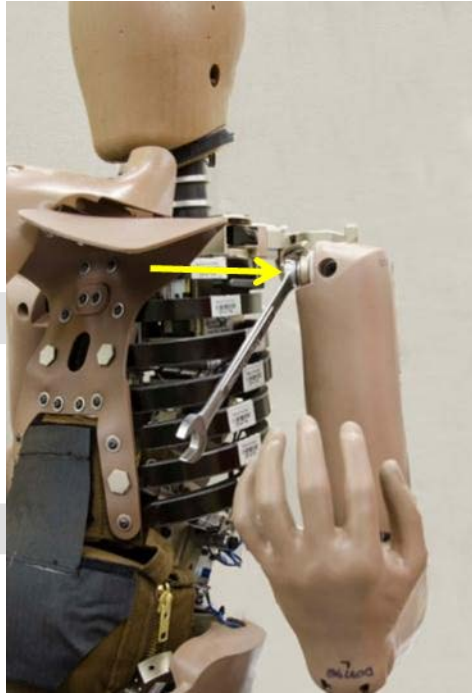


Figure 3-12. Upper arm orientation for setting joint torque about shoulder Y-axis to 1G

- 3.3.7 Remove the left forward range of motion (ROM) buffer cover (472-3816) to reveal the locknut behind it (Figure 3-13). Repeat for right arm.

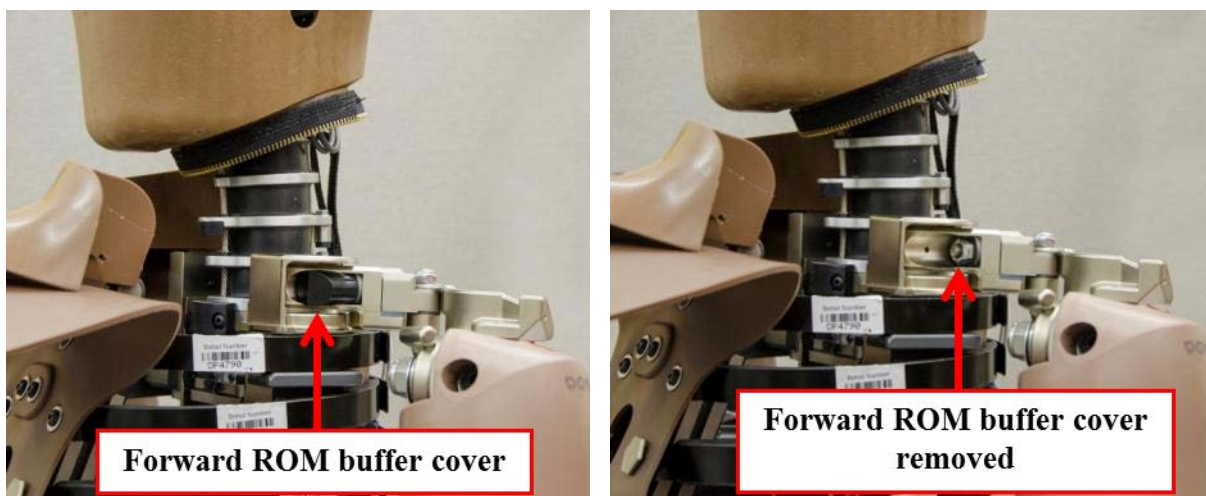


Figure 3-13. Removal of shoulder forward ROM buffer cover to reveal

- 3.3.8 Set the torque on the M8 x 1.25 mm nut under the forward ROM buffer to 10 N-m (Figure 3-14). Repeat for right arm.

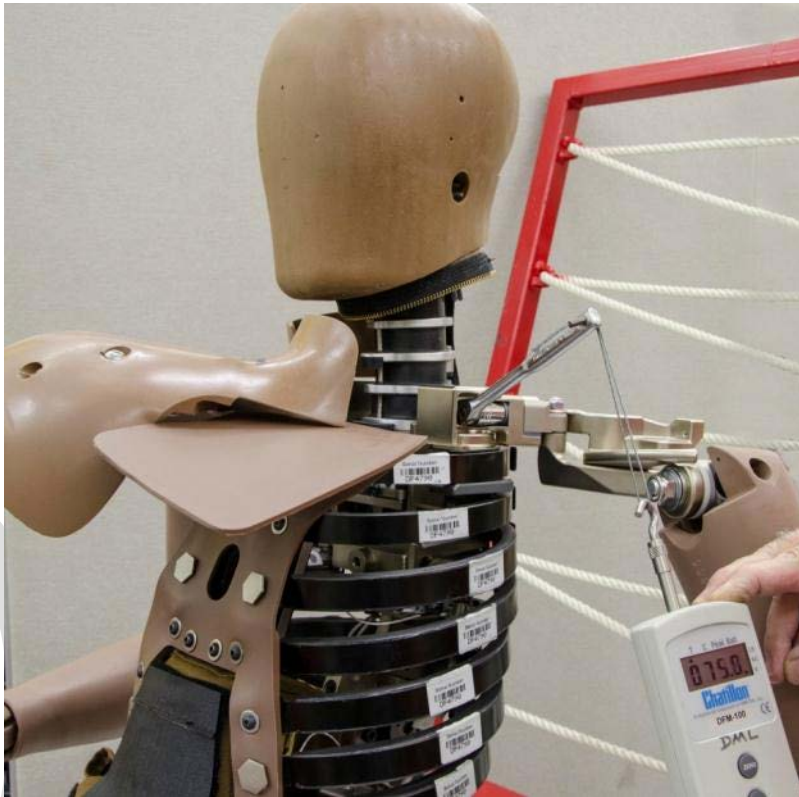


Figure 3-14. Shoulder pivot joint torque setting.

- 3.3.9 Reinstall the forward ROM buffer (472-3816) so that the line formed between the two beveled surfaces of the ROM buffer is vertical, and the beveled surface faces away from the body of the shoulder support (472-3814), as shown in Figure 3-15. Repeat for right arm.

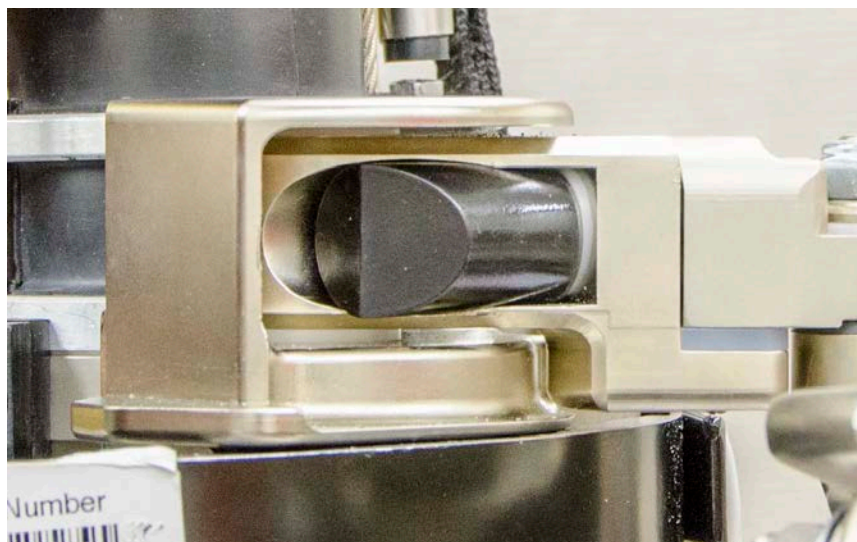


Figure 3-15. Reinstallation of forward ROM buffer.

- 3.3.10 Reinstall the left and right clavicles by replacing the modified M8 bolts (472-3891) on both the left and right shoulders (Figure 3-9).

3.4 Ankle Rotary Potentiometer Zeroing Procedure

Before conducting any of the dynamic impact tests, it is necessary to determine the voltage outputs of the individual ankle potentiometers when the ankle is held in a known orientation referred to as the **zero position**: zero degrees plantar-/dorsi-flexion (Y-axis), zero degrees inversion/eversion (X-axis), and zero degrees internal/external rotation (Z-axis). The zero position potentiometer voltage values, along with the rotational calibration values in degrees per volt (which should be supplied by the manufacturer or determined experimentally), are later used to determine the angular position of the foot relative to the tibia.

Materials: THOR-50M lower leg assembly (472-7000), ankle zero bracket (DL472-3500), leg mounting bracket (DL472-4100) mounted to a rigid surface.

Procedure:

- 3.4.1 Ensure that ankle potentiometers are installed so that they will not pass through the deadband during testing (see PADI for detailed explanation).
- 3.4.2 Remove the tibia skin (472-7370) and the two M6 x 1 x 16 BHCS which attach the tibia guard (472-7115) to the lower leg assembly (Figure 3-16).



Figure 3-16. Remove tibia guard

- 3.4.3 Remove the four M6 x 1 x 12 FHCS (two per side) which attach Achilles spring tube assembly to the rear of the lower tibia tube (Figure 3-17).



Figure 3-17. Remove Achilles spring tube assembly

- 3.4.4 Separate the ankle assembly from the leg by removing the four modified M6 BHSS (W50-61042) attaching the lower tibia tube assembly (472-7310) to the lower tibia load cell (Figure 3-18). Set the rest of the lower leg mechanical assembly (472-7300) aside.

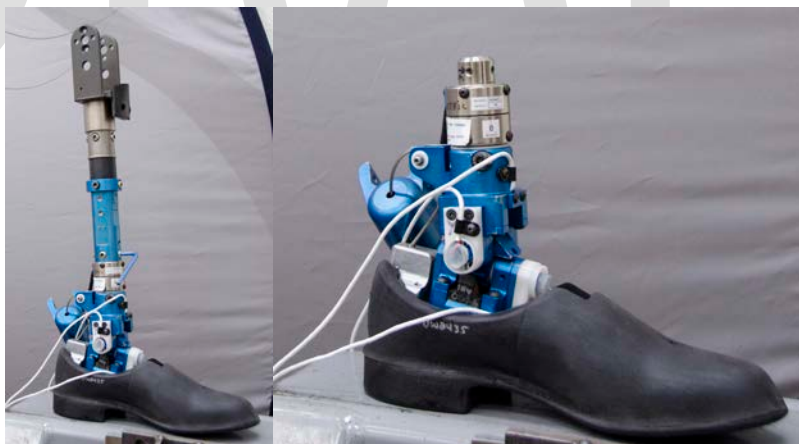


Figure 3-18. Separate the ankle assembly from the lower tibia load cell

- 3.4.5 Mount the Lower Leg Mounting Bracket Assembly (472-4100) to a rigid surface (Figure 3-19, APPENDIX A).



Figure 3-19. Install the lower leg mounting bracket

- 3.4.6 Mount the ankle assembly to the leg mounting bracket using four modified M6 BHSS (W50-61042) with torque set to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf). Ensure that the toe is pointing upward (Figure 3-20). Secure the Achilles spring tube assembly to the leg mounting bracket using four M6 x 12mm FHCS.

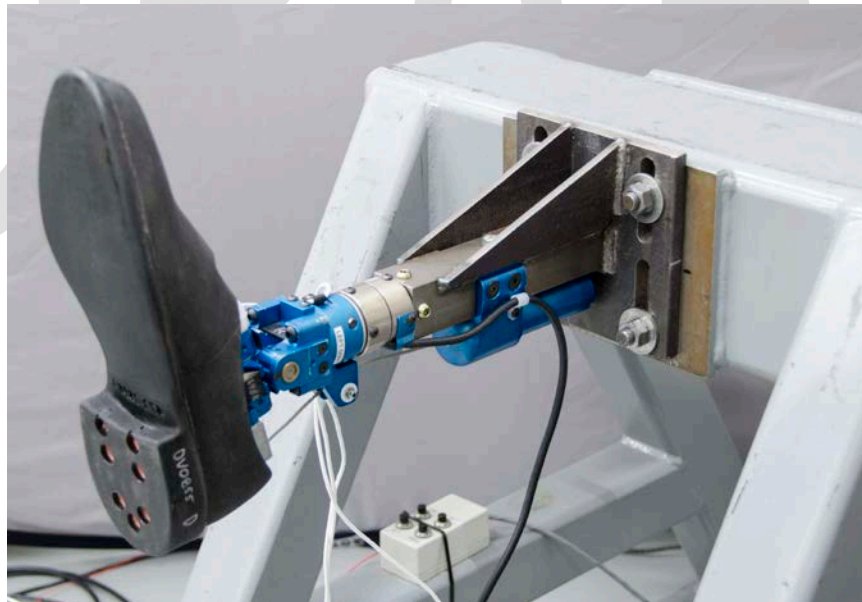


Figure 3-20. Attach lower leg and Achilles tube to bracket

- 3.4.7 Remove the four FHCS which attach the molded shoe to the ankle (Figure 3-21).

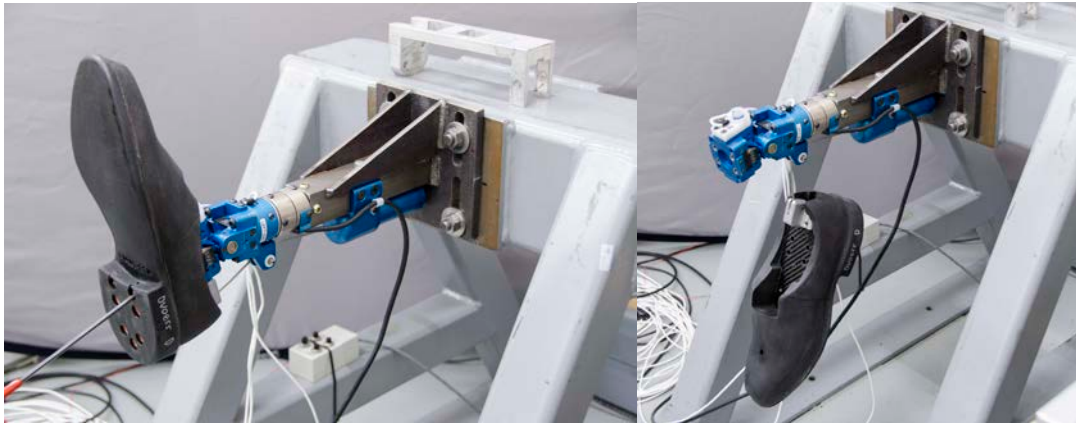


Figure 3-21. Remove the molded shoe

- 3.4.8 Attach the lower leg zero bracket (DL472-3500, APPENDIX A) to the base of the ankle using two M8 x 16 mm SHSS and to the leg mounting bracket using two M6 x 20 mm SHCS, one on each side (Figure 3-22 and Figure 3-23).

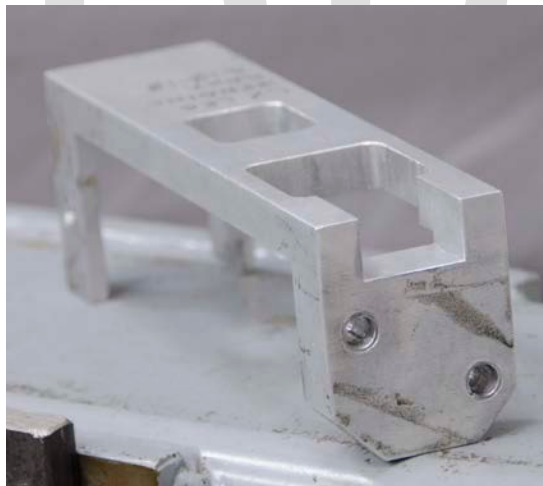


Figure 3-22. Lower leg zero bracket

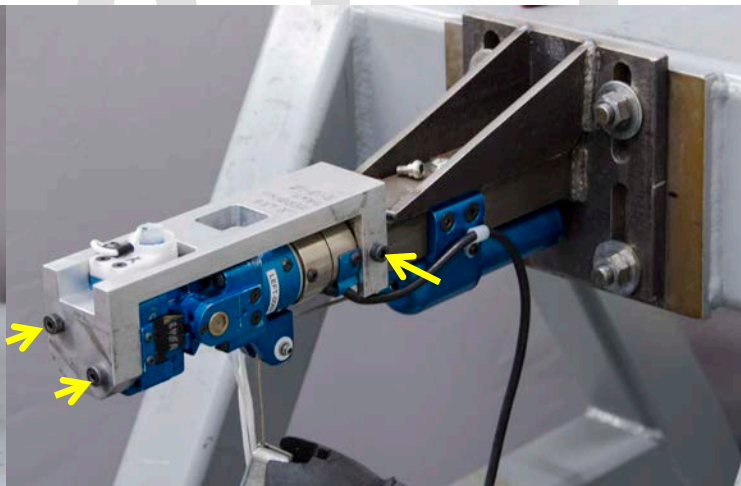


Figure 3-23. Attachment of lower leg zero bracket to leg mounting bracket

- 3.4.9 Record zero reference values for the X, Y, and Z potentiometers at this position:

Rotational Potentiometer	Serial Number	Zero Reference Value (degrees)
X-axis		
Y-axis		
Z-axis		

- 3.4.10 If the Achilles Cable Adjustment Procedure will be conducted immediately following this procedure, follow the steps below. Otherwise, this procedure is now complete.
- 3.4.11 Remove the ankle zero bracket by removing the two M8 x 16 mm SHSS and two M6 x 20 mm SHCS (Figure 3-23). Hold the ankle assembly in place while removing the ankle zero bracket, and install four modified M6 BHSS (W50-61042) to anchor the lower tibia load cell to the leg mounting bracket.
- 3.4.12 Attach the molded shoe to the ankle by installing four FHCS through the bottom of the heel of the shoe. Ensure that the Achilles spring cable is anchored to the lower Achilles mounting post.
- 3.4.13 Proceed to Section 3.5.3 in the Achilles Cable Adjustment Procedure.

3.5 Achilles Cable Adjustment Procedure

The THOR-50M lower leg assembly was designed with an adjustable Achilles tendon cable which can change the engagement point of the Achilles relative to the ankle rotation angle. It was designed to have a neutral position (zero resistive torque in the ankle joints) at an angle of 20° in plantarflexion. The following procedure describes the verification and adjustment of the Achilles spring cable tension using a fixture that is integrated with the same leg mounting bracket used in other lower leg qualification tests.

Materials: THOR-50M lower leg assembly (472-7000), Achilles fixture complete assembly (DL472-4000) mounted to a rigid surface.

Instrumentation: tension load cell, Y-axis ankle rotational potentiometer

Procedure:

- 3.5.1 Ensure that the ankle Y-axis potentiometer is installed such that it will not pass through the deadband during testing (see PADI for detailed instructions).
- 3.5.2 Assemble the leg to the lower mounting bracket assembly (Section 3.4.2 through Section 3.4.6).
- 3.5.3 Attach the load cell mounting assembly (DL472-4200) to the top of the leg mounting bracket using two flat M6 washers and M6-1 x 20 mm hex head cap screws (Figure 3-24).



Figure 3-24. Lower leg assembled to Achilles fixture

- 3.5.4 Position the leg to the zero reference values for the X axis and Z axis (Section 3.4.9) by adjusting the lower leg about each axis until the reference value is achieved ($\pm 0.5^\circ$).
- 3.5.5 Zero the initial value of the tension load cell. Do not zero the ankle Y axis potentiometer. Instead, apply any necessary corrections developed in Section 3.4 to the ankle Y axis potentiometer in the Ankle Rotary Potentiometer Zeroing Procedure.
- 3.5.6 Screw the pull wire assembly (DL472-4203) into the molded shoe (Figure 3-24). Attach the loop end of the pull wire to the wire hook connected to the tension load cell (DL472-4204). Ensure that the pull wire is centered in the groove of the pulley.

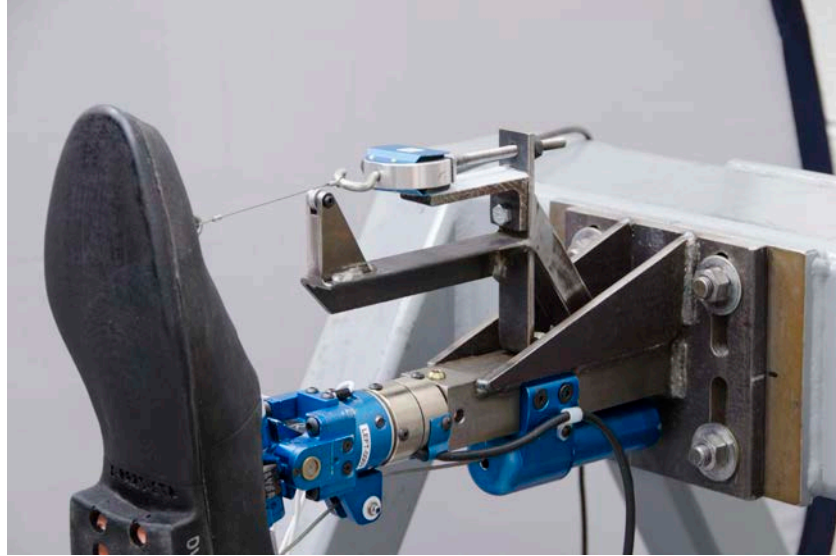


Figure 3-25. Install pull wire assembly

- 3.5.7 At this point, the toe section of the foot plate should rest in plantarflexion (e.g. the toe is further away from the pulley than it would be in the *zero position*). If it is not, loosen the 1/4-28 hex flange nut on the draw screw until the toe is in plantarflexion.
- 3.5.8 Connect the Y axis ankle potentiometer and the tension load cell to a data acquisition system. Set the system to record approximately 35 seconds of data, collected at 500Hz and record data from the following procedure.
- 3.5.9 Using a drill with a (long) hex nut bit, tighten the 1/4-28 hex flange nut on the draw screw (Figure 3-26) so that the foot moves in dorsiflexion and the ankle Y axis potentiometer passes $0^\circ \pm 0.5^\circ$ (the zero ankle position). The foot should be in dorsiflexion beyond the zero position at the completion of this task, with the flanged hex nut and thrust bearing touching the mounting bracket assembly. Reverse the direction of the drill to unload the tension on the pull wire completely.



Figure 3-26. Collecting force and angle data to determine Achilles load

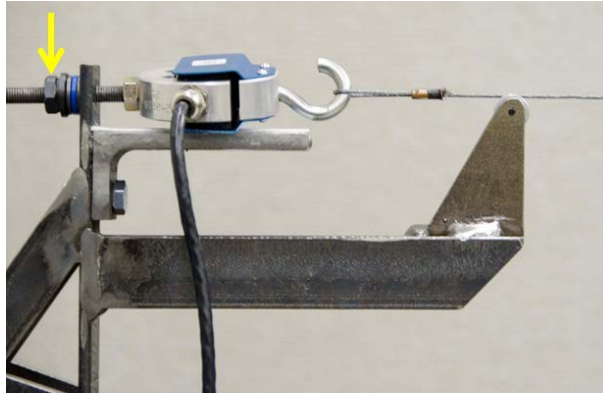


Figure 3-27. Location of adjustment nut on draw screw when Achilles is fully loaded

- 3.5.10 Filter the Y axis rotation and force measured by the tension load cell using a 1 Hz (fourth order) Butterworth filter. Review the *loading* data and find the tension when the angle is at $0^\circ \pm 0.5^\circ$ (the zero position). If the measured force is 77.8 ± 4.4 N (17.5 ± 1.0 lbf), this procedure is complete. Otherwise, proceed to the next step.
- 3.5.11 The Achilles spring tension must be adjusted if it does not meet the tension criteria. First detach the Achilles spring tube from the leg mounting bracket by removing the four M6 x 12mm FHCS. Locate the jam nuts at the top of the spring tube (Figure 3-28). If the tension is higher than the prescribed target tension, loosen both M5 hex jam nuts and move them slightly up the Achilles cable, releasing some tension on the compression spring assembly. If the tension is lower than the prescribed target tension, loosen the outer M5 hex jam nut and screw the inner nut slightly down the Achilles cable, increasing tension on the compression spring assembly. Once adjustments are made, with one wrench maintaining the position of the inner adjustment nut, tighten the outer jam to at least 1.5 N-m. Secure the Achilles spring tube assembly to the leg mounting bracket using four M6 x 12mm FHCS, and return to Section 3.5.9; repeat the procedure as necessary, adjusting tension until the 77.8 ± 4.4 N (17.5 ± 1.0 lbf) is achieved (Section 3.5.10).


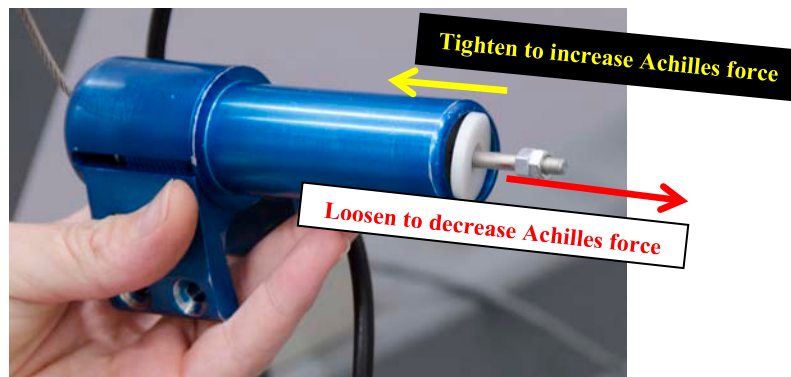


Figure 3-28. Adjusting tension on the Achilles

4 HEAD QUALIFICATION

4.1 Description

The head qualification test is a dynamic test performed to examine the force-time and acceleration-time characteristics of the head when impacted on the forehead with a 23.36 kg rigid impactor at 2.00 m/s.

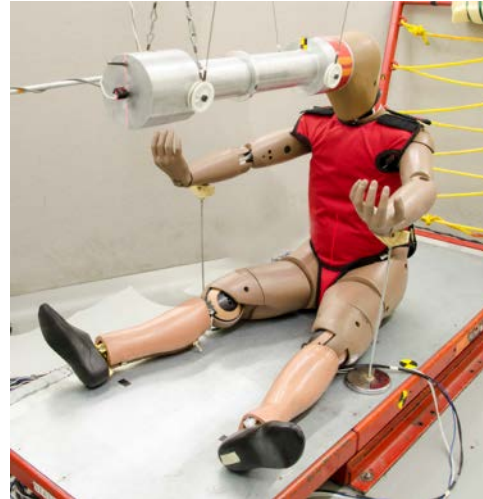

4.2 Materials

- ☐ Fully-assembled THOR-50M ATD (472-0000)
- ☐ Impactor 23.36 ± 0.02 kg (51.50 ± 0.05 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables⁹. The test probe is a 152.40 ± 0.25 mm (6.00 ± 0.01 in) diameter rigid cylinder. The impacting surface has a flat, right angle face with an edge radius of 12.7 ± 0.2 mm (0.50 ± 0.01 in).

4.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or a load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity
- ☐ Head center of gravity tri-axial accelerometers
- ☐ A dual-axis tilt sensor attached to head accelerometer mounting plate assembly (472-1200) to measure initial angle about “X” and “Y” axes
- ☐ A dual-axis tilt sensor attached to the pelvis (472-3777-1 or 472-3777-2) to measure initial angle about “X” and “Y” axes

4.4 Pre-Test Procedures

- 4.4.1 Inspect the head assembly for wear, tears, or other damage; if necessary take appropriate action to refurbish the part¹⁰.

⁹ Code of Federal Regulations, Anthropomorphic Test Devices, Title 49, §572.36(a).

¹⁰ See *Procedures for, Assembly, Disassembly, and Inspection for the THOR-50M ATD* (PADI)

- 4.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 4.4.3 Set the lower thoracic spine (LTS) pitch change joint to the **slouched** position (see Section 3.1).
- 4.4.4 Set the neck pitch change joint to the **neutral** position (see Section 3.2).

4.5 Test Procedure

- 4.5.1 Before positioning the dummy for the test, mark the point of impact on the head skin (472-1321). The impact point is 30 mm above the horizontal edge of the skull representing the brow line (Figure 4-1, right). Transferred to the face skin, the brow line is 17 mm superior to the Nasion detent on the head skin (472-1321), so the impact point can be located by measuring along the surface of the head skin to a point that is 47 ± 0.5 mm above the center of the Nasion (Figure 4-1, left). With a flexible ruler, measure to a point that is 47 ± 0.5 mm superior to the center of the Nasion detent along the contour of the midsagittal plane of the head skin, and mark this point on the head skin (Figure 4-2).

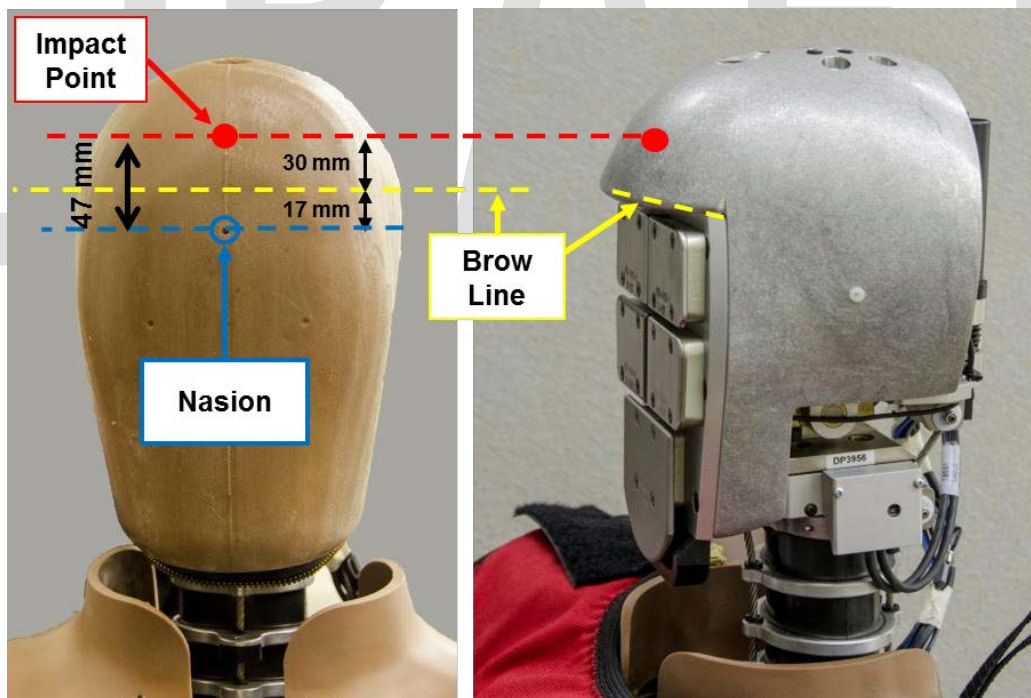


Figure 4-1. Impact location relative to Nasion detent on head skin.

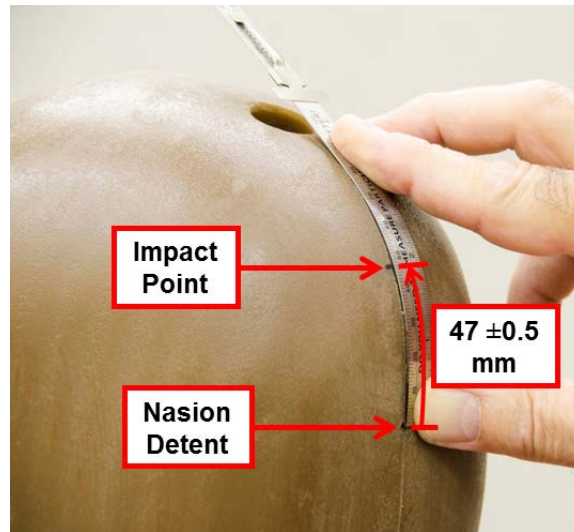


Figure 4-2. Measurement and marking of impact point on head skin.

- 4.5.2 If not currently installed, reinstall torso jacket.
- 4.5.3 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support, with all limbs extended horizontally and forward parallel to the midsagittal plane. The midsagittal plane shall be vertical within ± 1 degree (Figure 4-3).

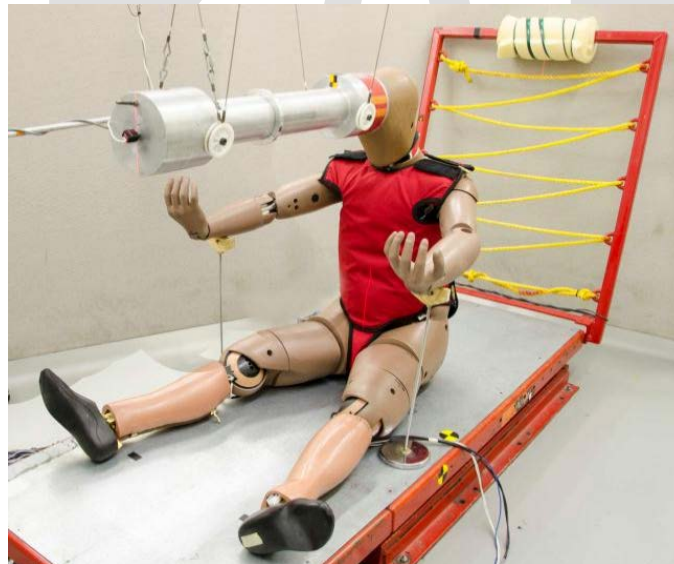


Figure 4-3. Initial setup for head qualification test.

- 4.5.4 Support the forearms in a fully-extended orientation (Figure 4-3). If this cannot be achieved, or the torso cannot be stabilized in the following two steps, repeat the Arm and Shoulder Joint Torque Settings procedure in Section 3.3 before proceeding.
- 4.5.5 Set the pelvis so that the angle measured by the pelvis tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $18 \pm 1^\circ$ in the Y-axis.
- 4.5.6 Set the head so that the angle measured by the head CG tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $-29 \pm 1^\circ$ in the Y-axis (Figure 4-4).

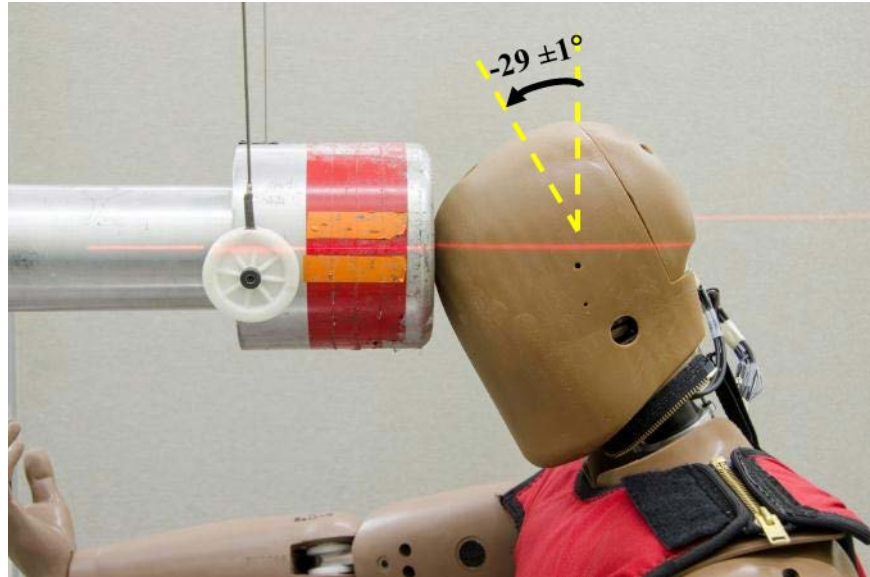


Figure 4-4. Angle of head and alignment with impactor.

- 4.5.7 Position the dummy so that the head is just touching the impactor face (Figure 4-4) when the probe is at its lowest position (at rest). The dummy should be seated so that the centerline of the probe axis aligns with the dummy's midsagittal plane.
- 4.5.8 Adjust the table height or impactor height so that the center of the impact face is aligned with the point marked on the head skin in Step 4.5.1 (Figure 4-6). A removable pointer (threaded into the centerline of the pendulum with approximately 30mm protruding) will aid this process (Figure 4-5). Remove the pointer tool when this step has been completed.

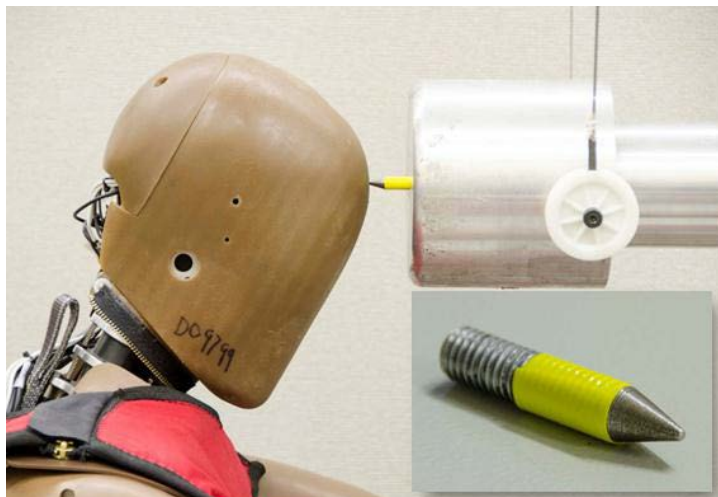


Figure 4-5. Use of a pointer tool to set impactor location

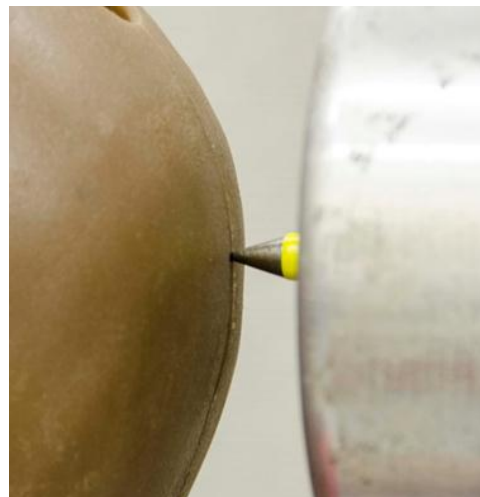


Figure 4-6. Alignment of impactor with impact point marked on head skin.

- 4.5.9 The probe at rest should just be contacting the face. If it is not, carefully adjust the dummy position relative to the probe while maintaining setup angles for impact position.
- 4.5.10 If not already unzipped, unzip the top shoulder portion of the jacket to allow the shoulder alignment marks to be viewed (Figure 4-7). Manipulate the upper arm in the anterior-posterior orientation until the interface between the rear ROM buffer (472-3816) and shoulder support (472-3814) is aligned with the scribe mark on the spring housing cover. If this cannot be achieved, repeat the procedures in Section 3.3 before proceeding.

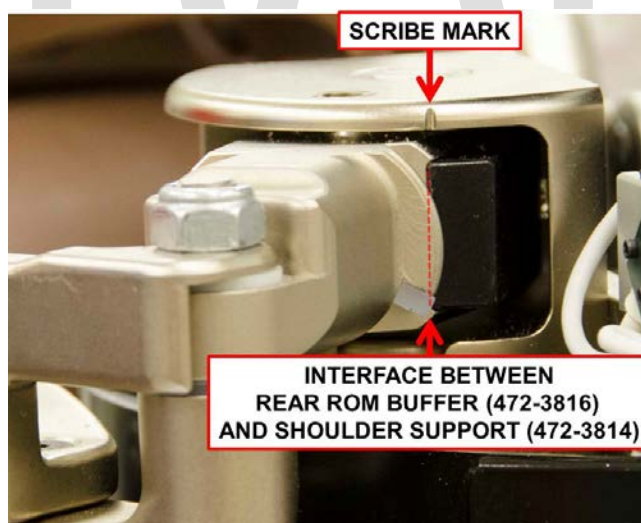


Figure 4-7. Align scribe mark to interface between rear ROM buffer and shoulder support.

- 4.5.11 Carefully reinstall the jacket by zipping the shoulders of the jacket.

- 4.5.12 The motion of the impactor should be constrained so that there is no significant lateral, vertical, or rotational movement.
- 4.5.13 Record the “as measured (AM)” channels listed in **Table 4-2** in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 4.5.14 Confirm the test setup parameters illustrated in **Table 4-1**.

Table 4-1. Head Impact Test Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Slouched
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading: Head	$X = 0 \pm 0.5^\circ$; $Y = -29^\circ \pm 1^\circ$
Tilt Sensor Reading: Pelvis	$X = 0 \pm 0.5^\circ$; $Y = 18 \pm 1^\circ$
Wait Time Between Tests	At Least 60 Minutes

- 4.5.15 Ensure that at least 60 minutes have passed since the last test on the head or face.
- 4.5.16 Conduct the test at an impact velocity of 2.00 ± 0.05 m/s.

4.6 Data Processing

- 4.6.1 Remove data channel offset per SAE J211 Section 8.4.3.
- 4.6.2 Filter channels based on the CFC filter classes listed in Table 4-2.
- 4.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 4.6.4 Calculate head CG resultant acceleration:

$$HDCG_{AR} = \sqrt{HDCG_{AX}^2 + HDCG_{AY}^2 + HDCG_{AZ}^2}$$

Table 4-2. Required Measurement Channels for the Head Impact Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOXC	XG	CM	PEND	PP	NWT
Head CG Accelerometer, X-axis	1000	DOHEAD0000THACXA	XL	AM	HDCG	AC	G'S
Head CG Accelerometer, Y-axis	1000	DOHEAD0000THACYA	YL	AM	HDCG	AC	G'S
Head CG Accelerometer, Z-axis	1000	DOHEAD0000THACZA	ZL	AM	HDCG	AC	G'S
Head CG Resultant Acceleration	N/A	DOHEAD0000THACRA	RS	CM	HDCG	PP	G'S

4.7 Performance Specification

Table 4-3. Head Impact Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	1.95	2.05
Peak Probe Force	N	5362	5972
Peak Head CG Resultant Acceleration	g	109.6	124.2

DRAFT


5 FACE QUALIFICATION

5.1 Description

This test examines facial impact response to loading by a rigid 152.4 mm diameter circular disk attached to a 13.00 kg impactor at a velocity of 6.73 m/s.

5.2 Materials

- ☐ Fully-assembled THOR-50M ATD
- ☐ Impactor 13.00 ± 0.02 kg (28.66 ± 0.02 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables. The test probe is a 152.70 ± 0.25 mm (6.01 ± 0.01 in) diameter rigid cylinder. The impacting surface must have a flat, right angle face with an edge radius of 12.7 ± 0.2 mm (0.50 ± 0.01 in).
- ☐ Erect posture abdomen foam insert (472-0011)

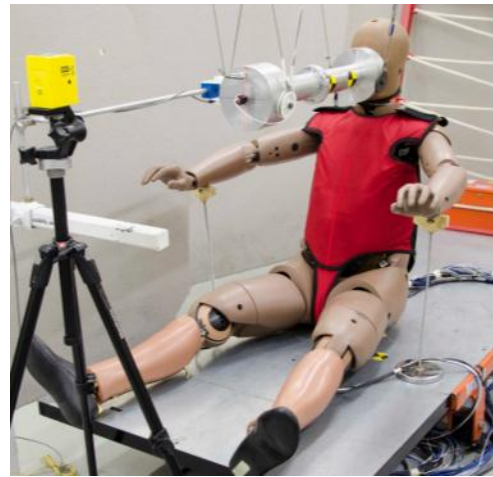

5.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or a load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity
- ☐ Head center of gravity tri-axial accelerometers
- ☐ A dual-axis tilt sensor attached to head accelerometer mounting plate assembly (472-1200) to measure initial angle about “X” and “Y” axes
- ☐ A dual-axis tilt sensor attached to the pelvis (472-3777-1 or 472-3777-2) to measure initial angle about “X” and “Y” axes

5.4 Pre-Test Procedures

- 5.4.1 Remove head cap (472-1110) by removing four M6 x 1 x 16 mm SHCS.
- 5.4.2 Remove the head skin assembly (472-1320) by first spreading the posterior portion away from the groove at the rear of the skull assembly (Figure 5-1), then pulling the top of the head skin forward and down (Figure 5-2).



Figure 5-1. Separation of head skin from grooves at posterior of skull assembly

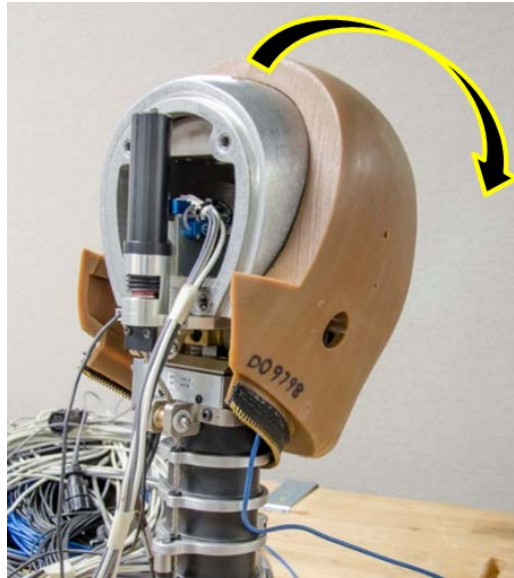


Figure 5-2. Removal of head skin from skull assembly

- 5.4.3 Inspect the face skin, face foam, and head skin for wear, tears, or other damage; if necessary take appropriate action to refurbish the part¹¹.
- 5.4.4 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 5.4.5 Set the lower thoracic spine (LTS) pitch change joint to the **erect** position (see Section 3.1).
- 5.4.6 Set the neck pitch change joint to the **neutral** position (see Section 3.2).

5.5 Test Procedure

- 5.5.1 Ensure that at least 60 minutes have passed *with the head skin removed* since Step 5.4.2.
- 5.5.2 Ensure that the face foam (472-1401) is positioned in the head skin assembly (472-1320). Install head skin assembly by positioning in front of and below skull and moving over the skull in an up-and-back motion until the head skin posterior flaps are positioned along the posterior groove of the skull.

¹¹ See *Procedures for, Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

- 5.5.3 Install head cap (472-1110) using four M6 x 1 x 16 mm SHCS torqued to 20.3 N-m (15.0 ft-lbf).
- 5.5.4 Before positioning the dummy for the test, mark the point of impact on the head skin (472-1321). The impact point is centered between the cheek and chin plates on the face (Figure 5-3, right). Transferred to the head skin, this point is 68 ± 0.5 mm inferior of the Nasion detent (Figure 5-3, left). With a flexible ruler, measure to a point that is 68 ± 0.5 mm inferior to the center of the Nasion detent along the contour of the midsagittal plane of the head skin, and mark this point on the head skin (Figure 5-4).

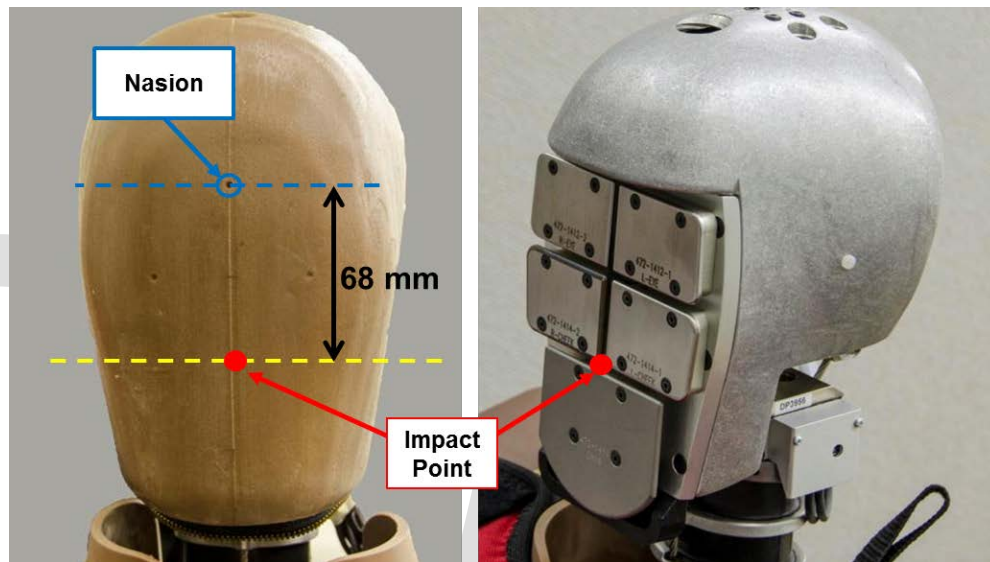


Figure 5-3. Face impact location relative to Nasion detent on head skin.

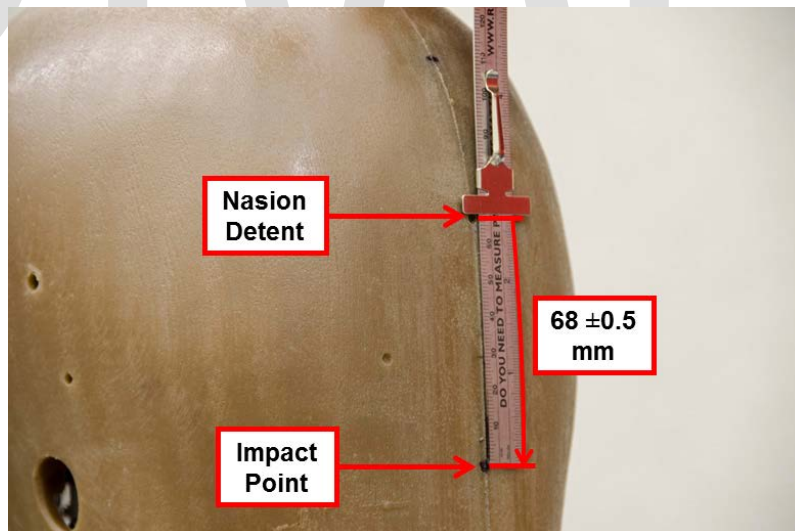


Figure 5-4. Measurement and marking of impact point on head skin

- 5.5.5 With the jacket uninstalled removed/pulled away from the thorax (but with crotch strap in position so jacket installation does not affect positioning), remove the Upper and Lower Abdomen Velcro Cover (472-4763) from the anterior of the abdomen, insert the erect posture abdomen foam (472-0011), and replace the Velcro Cover such that the top edge attaches to the upper abdomen insert (Figure 5-5).



Figure 5-5. Erect posture foam (right) as inserted into the lower abdomen bag (left)

- 5.5.6 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support, with all limbs extended horizontally and forward parallel to the midsagittal plane. The midsagittal plane shall be vertical within ± 1 degree (Figure 5-6).

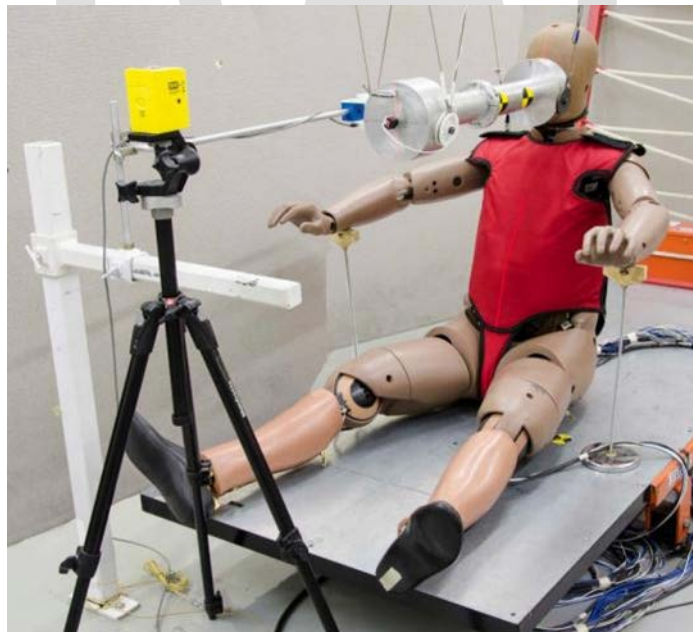


Figure 5-6. Initial setup for the face disk impact test

- 5.5.7 Support the forearms in a fully-extended orientation (Figure 5-6). If this cannot be achieved, or the torso cannot be stabilized in the following two steps, repeat the Arm and Shoulder Joint Torque Settings procedure in Section 3.3 before proceeding.

- 5.5.8 Set the pelvis so that the angle measured by the pelvis tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $18 \pm 1^\circ$ in the Y-axis.
- 5.5.9 Set the head so that the angle measured by the head CG tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $0 \pm 1^\circ$ in the Y-axis.
- 5.5.10 Position the dummy so that the face is just touching the probe when the probe is at its lowest position (at rest). The dummy should be seated so that the centerline of the probe axis aligns with the dummy's midsagittal plane.
- 5.5.11 Adjust the table height or impactor height so that the center of the impact face is aligned with the point marked on the head skin in Step 5.5.2 (Figure 5-7). A removable pointer (threaded into the centerline of the pendulum with approximately 30mm protruding) will aid this process (Figure 5-7).

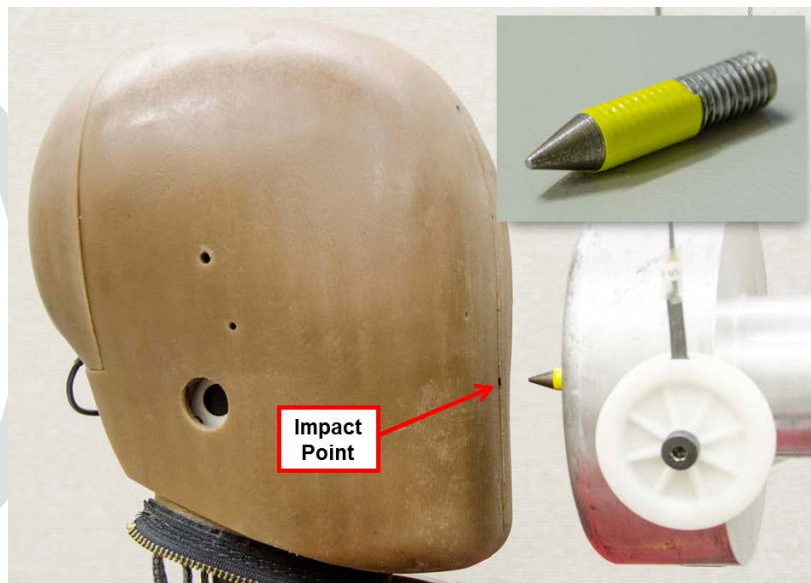


Figure 5-7. Use of a pointer at the center of the impact face to align impactor.

- 5.5.12 If used, remove the pointer by unthreading from the centerline of the impactor. The probe at rest should just be contacting the face. If it is not, carefully adjust the dummy position relative to the probe while maintaining setup angles for impact position.
- 5.5.13 If not already unzipped, unzip the top shoulder portion of the jacket to allow the shoulder alignment marks to be viewed (Figure 5-8). Manipulate the upper arm in the anterior-posterior orientation until the interface between the rear ROM buffer (472-3816) and shoulder support (472-3814) is aligned with the scribe mark on the spring housing cover. If this cannot be achieved, repeat the procedures in Section 3.3 before proceeding.

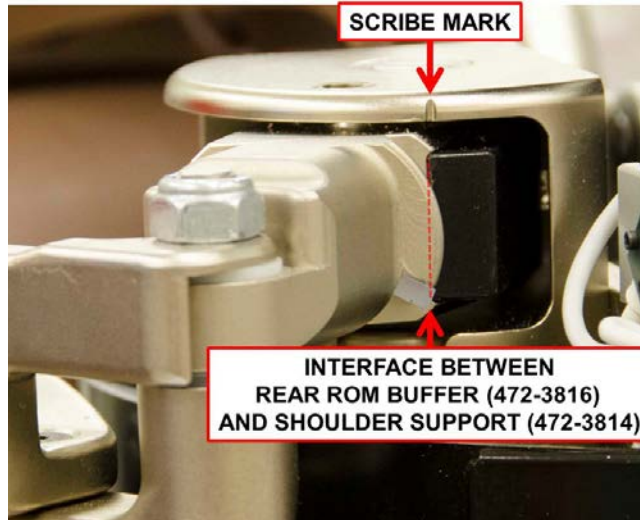


Figure 5-8. Align scribe mark to interface between rear ROM buffer and shoulder support.

- 5.5.14 Carefully reinstall the jacket by zipping the sides and shoulders of the jacket.
- 5.5.15 The motion of the impactor should be constrained so that there is no significant lateral, vertical, or rotational movement.
- 5.5.16 Record the “as measured (AM)” channels listed in **Table 5-2** in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 5.5.17 Confirm the test setup parameters illustrated in **Table 5-1**.

Table 5-1. Face Rigid Disk Impact Test Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Erect with Erect Posture Abdomen Foam
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading: Head	$X = 0 \pm 0.5^\circ$; $Y = 0 \pm 1^\circ$
Tilt Sensor Reading: Pelvis	$X = 0 \pm 0.5^\circ$; $Y = 18 \pm 1^\circ$
Wait Time Between Tests	At Least 60 Minutes w/Head Skin Removed

- 5.5.18 Conduct the test at a velocity of 6.73 ± 0.05 m/s.

5.6 Data Processing

- 5.6.1 Remove data channel offset per SAE J211 Section 8.4.3.
- 5.6.2 Filter channels based on the CFC filter classes listed in Table 5-2.
- 5.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 5.6.4 Calculate head CG resultant acceleration:

$$HDCG_{AR} = \sqrt{HDCG_{AX}^2 + HDCG_{AY}^2 + HDCG_{AZ}^2}$$

Table 5-2. Required Measurement Channels for Face Qualification

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOXC	XG	CM	PEND	PP	NWT
Head CG Accelerometer, X-axis	1000	DOHEAD0000THACXA	XL	AM	HDCG	AC	G'S
Head CG Accelerometer, Y-axis	1000	DOHEAD0000THACYA	YL	AM	HDCG	AC	G'S
Head CG Accelerometer, Z-axis	1000	DOHEAD0000THACZA	ZL	AM	HDCG	AC	G'S
Head CG Resultant Acceleration	N/A	DOHEAD0000THACRA	RS	CM	HDCG	PP	G'S

5.7 Performance Specifications


Table 5-3. Face Rigid Disk Impact Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	6.68	6.78
Peak Probe Force	N	9117	11143
Peak Head CG Resultant Acceleration	g	219	267

6 NECK QUALIFICATION

6.1 Summary

There are five procedures used to qualify the THOR-50M neck performance. A torsion test, which is unique to THOR but similar to that of the Q3s, is conducted in the left and right directions to assess the response of the neck in rotation about its Z-axis. Flexion and extension tests resemble the Hybrid III head-neck pendulum test defined in CFR Title 49, Part 572, Subpart E with 152.4 mm (6 in) aluminum honeycomb used to decelerate the pendulum. The flexion and extension tests assess the neck performance in forward and rearward bending about the local Y-axis. The neck is also tested in a lateral mode resembling the ES-2re head-neck lateral pendulum test defined in CFR Title 49, Part 572, Subpart U using 76.2 mm (3 in) aluminum honeycomb for pendulum deceleration. The lateral tests assess the neck performance in the left and right directions about the local X-axis.

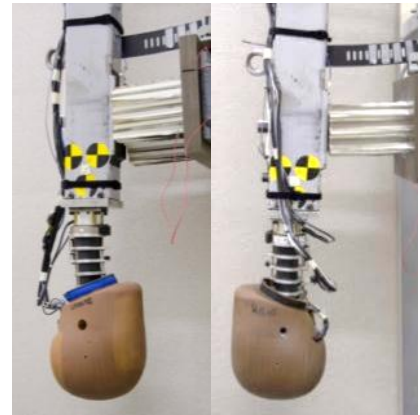

6.2 Description

For the flexion, extension, and lateral tests, the lower neck load cell is attached rigidly to the bottom of the head-neck pendulum, and the pendulum is decelerated from the specified speed during contact with a Hexcel® aluminum honeycomb (or equivalent). The pendulum is also used for neck torsion tests, but instead of the lower neck load cell being attached to the pendulum, a neck torsion fixture is used. Logistically, it is recommended to run the neck torsion tests first, followed by the flexion, extension, and lateral tests.

6.3 Materials

- ☐ THOR-50M ATD head and neck assembly (472-1000 and 472-2000), including all neck spring hardware
- ☐ Head-neck pendulum (as defined in CFR Title 49, §572.33(c)3). Modifications to the mounting plate referenced in §572.33(c)3, Figure 22 may be necessary to match the hole pattern of the THOR-50M lower neck load cell or structural replacement (SA572-S111 or 472-2600). A drawing for such is not included herein due to known differences in lab-specific pendulum configurations.
- ☐ 152.4 mm (6 in) deep aluminum honeycomb¹² used for decelerating the pendulum in flexion, extension, and torsion modes. Alternate deceleration methods may be used provided that the deceleration pulse requirements are met.

¹² Length and width of the honeycomb are specific to each lab's pendulum setup in order to obtain the specified pulse, so honeycomb sizes may vary between labs.

- ☐ 76.2 mm (3 in) deep aluminum honeycomb used for decelerating the pendulum in lateral mode. Alternate deceleration methods may be used provided that the deceleration pulse requirements are met.
- ☐ Neck torsion fixture (DL472-1000)

DRAFT

6.4 Instrumentation

- ☐ Upper neck 6-axis load cell
- ☐ 3 Angular Rate Sensors (ARS) in the head (X, Y, Z)
- ☐ Instrumentation to measure the impact velocity
- ☐ Rotational potentiometer on neck torsion fixture
- ☐ Pendulum accelerometer
- ☐ Pendulum Angular Rate Sensor (ARS)

Mount the ARS to a surface on the pendulum arm that is perpendicular to the plane of motion of the pendulum's longitudinal axis, such that the rotational velocity about the global Y-axis is recorded (Figure 6-1). Set the polarity of the pendulum ARS such that the rotation of the pendulum towards the honeycomb decelerator results in a positive angular velocity before impact.

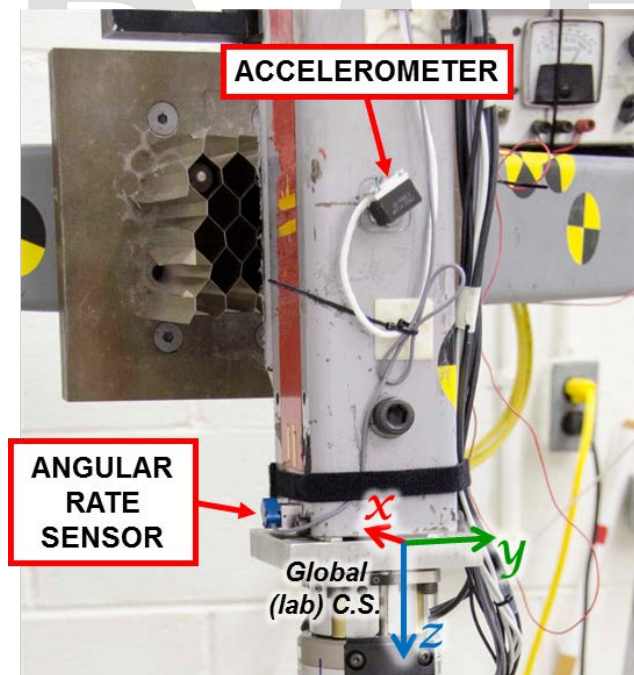


Figure 6-1. Installation of ARS on pendulum

6.5 Pre-Test Neck Setup Procedure

Before the neck qualification procedures are performed, the neck spring towers must be properly installed, adjusted, and locked in place using a jam nuts at the top of the front and rear towers (Figure 6-2). *Once the spring tower adjustment has been made and neck qualification tests have been performed, do not adjust the spring towers again or new neck qualification tests must be performed.*

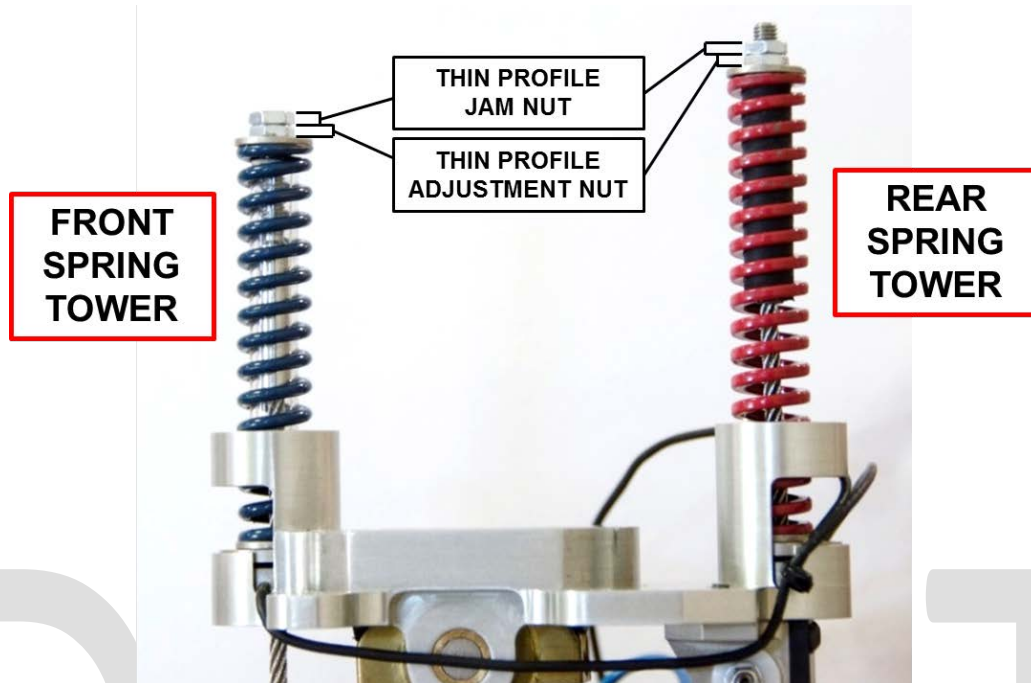


Figure 6-2. Neck spring tower jam nut configuration

- 6.5.1 Remove the head from the neck by removing four M6 FHSCS from the bottom of the head/neck mounting platform (472-2210). Remove the front and rear spring tubes (472-2203) by unscrewing by hand from the head/neck mounting platform.
- 6.5.2 The spring tower cable setup is best performed with the base of the lower neck load cell clamped to a rigid, flat horizontal surface. Measure the angle of the surface; record this value (*Surface*[°]). Place an inclinometer on the top surface of the upper neck load cell socket connector cover (SA572-S110), as shown in Figure 6-3; measure and make note of the neck angle (*UpNeckLoadCell*[°]). Calculate the bend in the neck (*MaxNeckBendAngle*[°]) using the equation below. If the maximum neck bend exceeds 2°, then manipulate the neck in flexion or extension as needed to straighten the neck below 2° of bend. Measure the upper neck load cell angle to assure the neck meets this criterion. If still unable to achieve the *MaxNeckBendAngle*[°], the neck should be replaced before proceeding with this setup.

$$MaxNeckBendAngle^{\circ} = |UpNeckLoadCell^{\circ} - Surface^{\circ}|$$

$$MaxNeckBend^{\circ} \leq \pm 2^{\circ}$$

- 6.5.3 Place the inclinometer on top of the neck mounting platform (472-2210) as shown in Figure 6-4 to measure *NeckMountPlatform*[°]. Calculate the *PlateAngle*[°].

$$PlateAngle^{\circ} = |UpNeckLoadCell^{\circ} - NeckMountPlatform^{\circ}|$$

If the *PlateAngle*[°] is less than or equal to 1°, proceed directly to Section 6.5.5



Figure 6-3. Inclinometer placement on top surface of upper neck load cell (*UpNeckLoadCell*•)



Figure 6-4. Inclinometer placement on top surface of neck mounting platform (*NeckMountPlatform*•)

- 6.5.4 If the *PlateAngle*° is greater than 1°, move the neck mounting platform until achieving a *PlateAngle*° of 1°. Do not force the *PlateAngle*° setting to a value ***much smaller*** than 1° as this puts undesired additional load on the neck cables. The goal is to achieve a *PlateAngle*° of 1° or less with *minimal* loads placed on front and rear neck cables. *While holding and maintaining the PlateAngle° to 1°, proceed to Section 6.5.5.*
- 6.5.5 Assure that the springs are properly seated on the front and rear neck cables (Figure 6-5 and Figure 6-6). Install the M5 x 0.8 jam nuts on *both* the front and rear cables so that they just contact the springs (Figure 6-7). If the *PlateAngle*° required adjustment (if it was initially greater than 1° as in Section 6.5.4), check the *PlateAngle*° once again to assure that it is 1° (Figure 6-3 and Figure 6-4); if it is not 1°, *slightly* adjust the front jam nut to achieve the 1° setting, keeping in mind that the goal is to achieve a *PlateAngle*° of 1° or less with *minimal* loads placed on front and rear neck cables.



Figure 6-5. Front spring properly seated against spring load cell

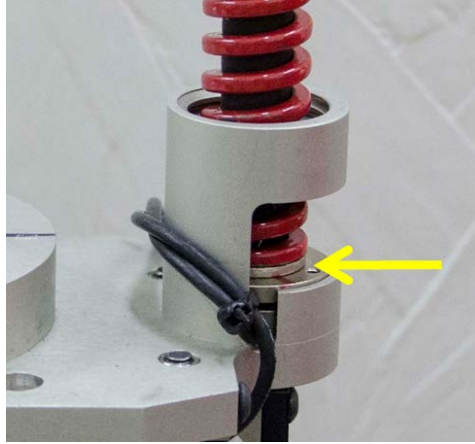


Figure 6-6. Rear spring properly seated against spring load cell



Figure 6-7. Install jam nut on front and rear springs after achieving desired plate angle setting

- 6.5.6 To assure that the spring adjustment exercise has not added excessive bend to the neck, the angle of the top surface of the upper neck load cell (Figure 6-3) must be less than or equal to 2° relative to the mounting surface of the neck:

$$MaxNeckBendAngle^{\circ} = |UpNeckLoadCell^{\circ} - Surface^{\circ}|$$

$$MaxNeckBend^{\circ} \leq \pm 2^{\circ}$$

- 6.5.7 If the maximum neck bends exceeds 2°, then the cable setup procedure should be repeated. If still unable to achieve the plate angle setting requirements and maximum neck bending requirements simultaneously, then try replacing the neck or the nodding block and repeating the procedures.
- 6.5.8 Once both plate angle and maximum neck bend angles are achieved, hold the wrench in place to maintain the front adjustment nut position and install an M5 x 0.8 jam nut on top of the front adjustment nut (Figure 6-8). Tighten the jam nut with a second wrench to a torque of at least 1.5 N-m. Repeat this procedure for the rear cable (Figure 6-9).

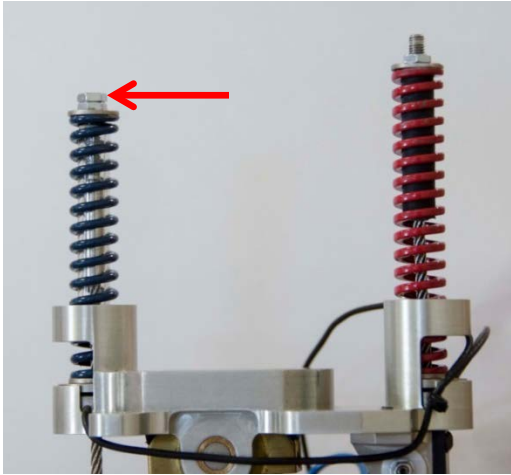


Figure 6-8. Jam nut installed on top of adjustment nut on front spring tower

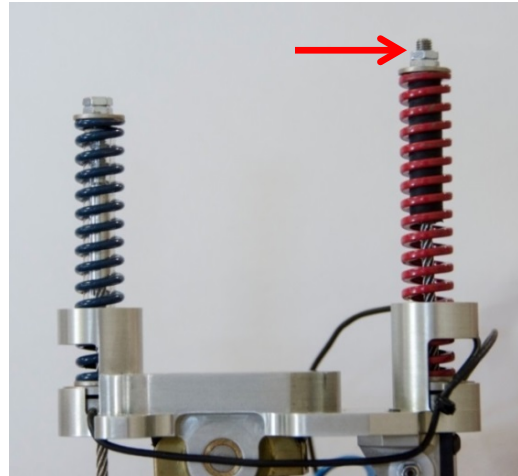


Figure 6-9. Jam nut installed on top of adjustment nut on rear spring tower

6.5.9 Once the neck cables are adjusted as above, the neck is ready for qualification testing. The cables must not be adjusted after qualification testing as this may invalidate the qualification results.

6.5.10 Screw on the Front and Rear Spring Tubes (472-2103) (Figure 6-10).

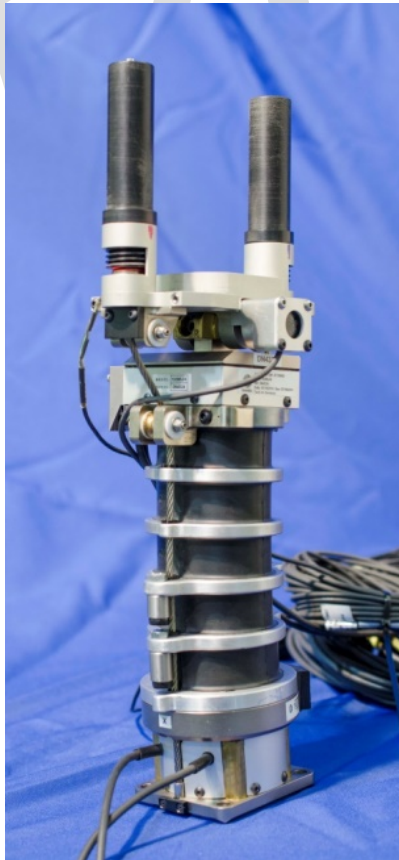


Figure 6-10. Screw on neck spring tubes

6.6 Neck Torsion Test

6.6.1 Neck Torsion Test Procedure

- 6.6.1.1 Inspect the neck assembly for wear, tears, or other damage and for any de-bonding between the rubber pucks and metal plates. Inspect the front and rear springs (including the inserted rubber tubes) within the head assembly for any wear or other damage. Inspect the front and rear OC stops at the bottom of the head also for wear and damage; if necessary take appropriate action to refurbish the parts¹³.
- 6.6.1.2 Soak the head and neck assembly in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 6.6.1.3 Install the appropriate 152.4 mm (6") aluminum honeycomb (or equivalent) to meet the pendulum pulse specified in Table 6-11 and Figure 6-38 for an impact velocity of 5.00 ± 0.05 m/s. Ensure that the contact area of the aluminum honeycomb engages the impactor plate on the pendulum upon impact.
- 6.6.1.4 If it has not yet been carried out on this ATD, conduct the Pre-Test Neck Setup Procedure (See Section 6.5)
- 6.6.1.5 If the Pre-Test Neck Setup Procedure was completed immediately prior to this test, re-install the neck spring tubes front and rear spring tubes (472-2203) by screwing in by hand to the head/neck mounting platform and skip to Step 6.6.1.13.
- 6.6.1.6 Remove the neck/head assembly (including the lower neck load cell) from the torso by removing the four M6 x 1 x 25 mm SHCS (two anterior and two posterior) that hold the base of the lower neck load cell to the torso (Figure 6-11 and Figure 6-12).

¹³ See *Procedures for Assembly, Disassembly, and Inspection for the THOR-50M ATD* (PADI)

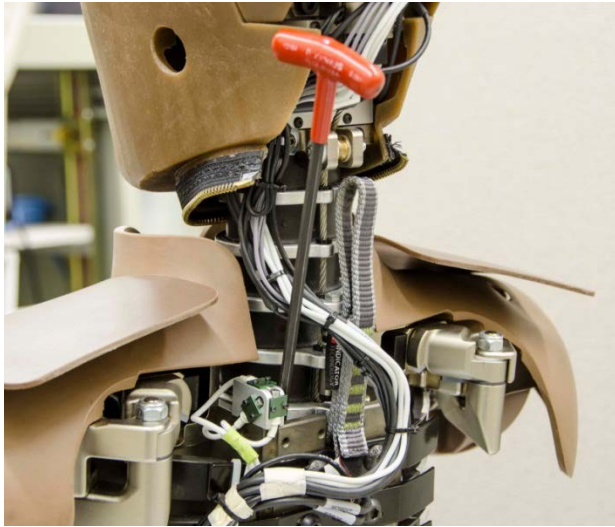


Figure 6-11. Removal of posterior bolts that attach the neck to the torso

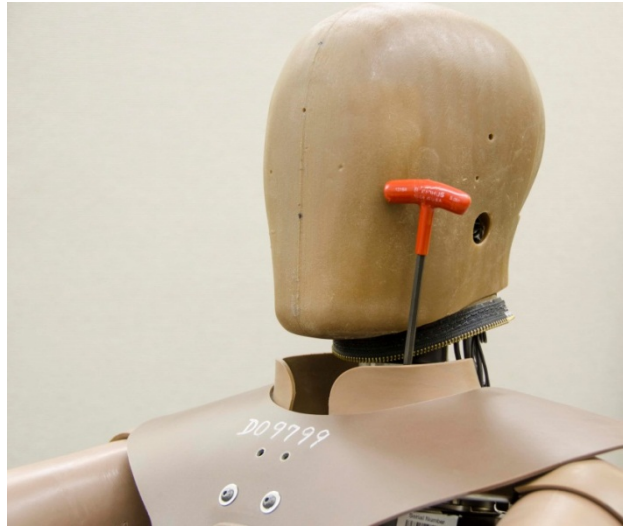


Figure 6-12. Removal of anterior bolts that attach the neck to the torso

- 6.6.1.7 To separate the head/neck assembly from the remainder of the ATD, the first rib needs to be partially detached to allow the lower neck load cell wires to be removed. Remove the two M8 x 1.25 x 10 mm BHCS of rib #1 at the spine (Figure 6-13).



Figure 6-13. Two posterior bolts attaching rib #1 to the spine

- 6.6.1.8 Remove only the right side M5 x 0.8 x 22 mm BHCS that holds the anterior right end of rib #1 to the bib (Figure 6-14).



Figure 6-14. Uninstall right bolt for rib #1 on the bib

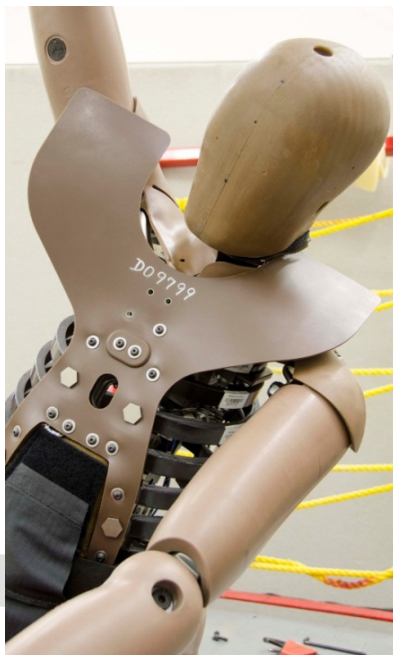


Figure 6-15. Raise right arm for easier access to remove load cell wiring



Figure 6-16. Rib #1 can be moved to access wiring for neck removal

6.6.1.9 Raise the right arm for easier access to the detached rib (Figure 6-15). The lower neck load cell wiring can then be routed under the anterior portion of rib #1 (Figure 6-16) and the head/neck assembly can be separated from the torso (Figure 6-17).

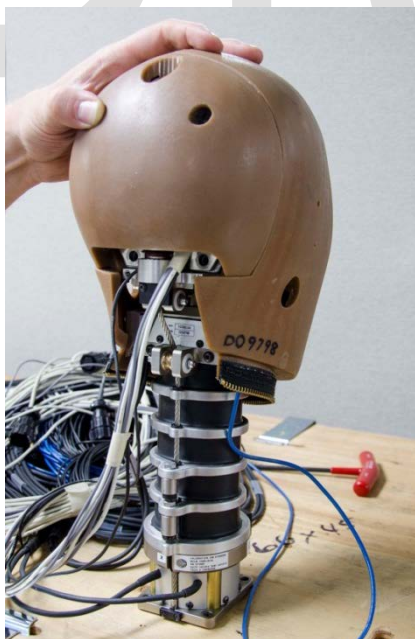


Figure 6-17. Isolated head and neck assembly

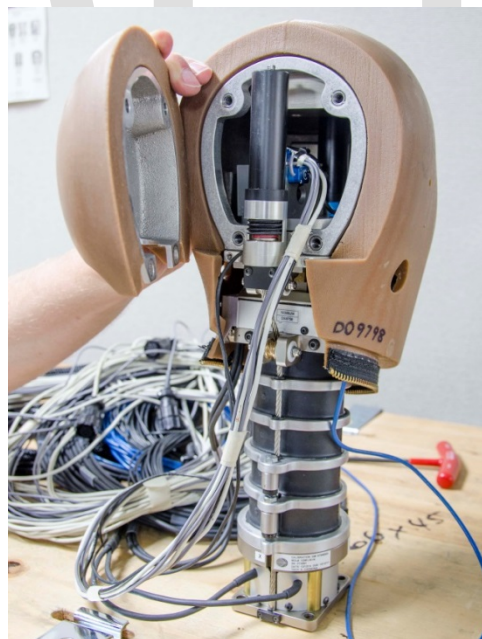


Figure 6-18. Removal of head cap

- 6.6.1.10 Uninstall the head cap (472-1110) by removing the four M6 x 1 x 16 mm SHCS attaching it to the skull assembly (Figure 6-18).
- 6.6.1.11 Remove the head skin assembly (472-1320) by first spreading the posterior portion away from the groove at the rear of the skull assembly (Figure 6-19), then pulling the top of the head skin forward and down (Figure 6-20).



Figure 6-19. Separation of head skin from grooves at posterior of skull assembly

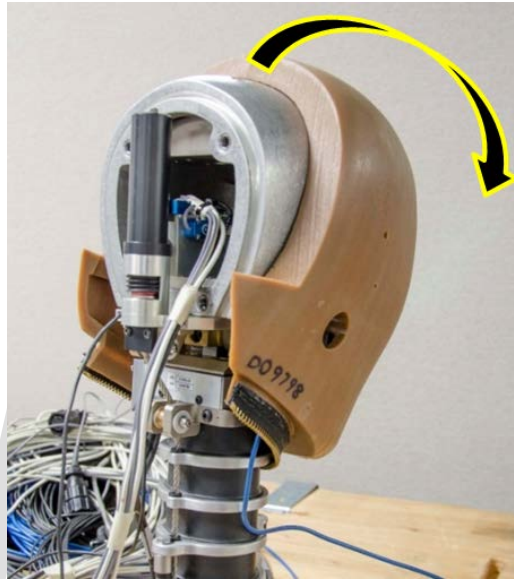


Figure 6-20. Removal of head skin from skull assembly

- 6.6.1.12 Remove the four M6 x 1 x 25 mm FHCS at the bottom of the head/neck mounting platform to disconnect the head from the neck (Figure 6-21). Separate the head and neck by pulling the neck away from the head in a direction parallel to the neck column until the front spring tower is completely outside of the skull (Figure 6-22). If installed, remove the head instrumentation. The isolated neck assembly (472-2000) is shown in Figure 6-23.

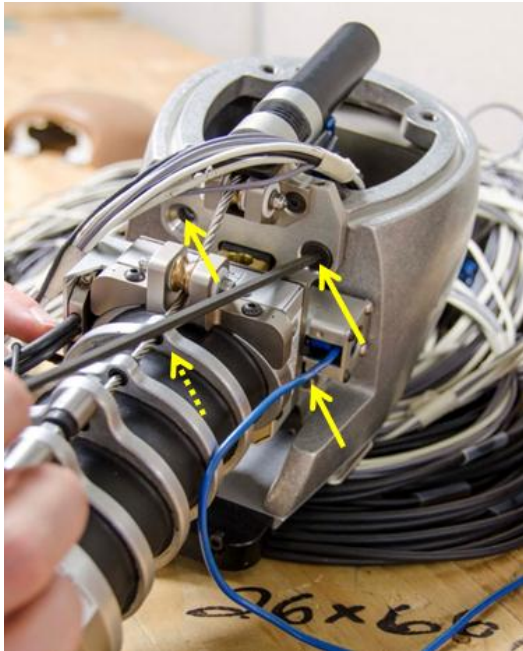


Figure 6-21. FHCS connecting head/neck mounting platform to skull assembly

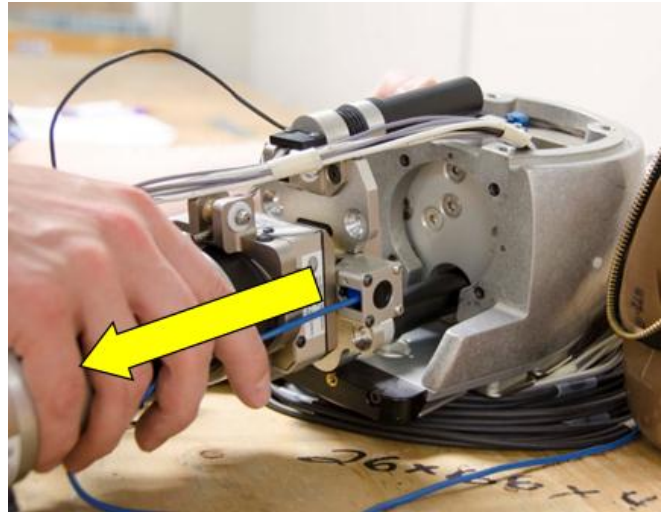


Figure 6-22. Motion necessary to separate the neck assembly from the skull assembly

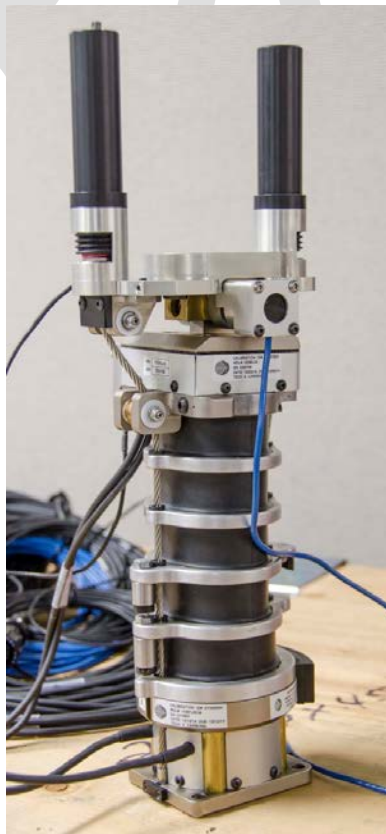


Figure 6-23. THOR-50M neck assembly

6.6.1.13 Mount the angular rate sensor (ARS, SA572-S58) on top of the neck mounting adapter (DL472-1170) at the edge opposite the front spring tower recess, as shown in Figure 6-24.

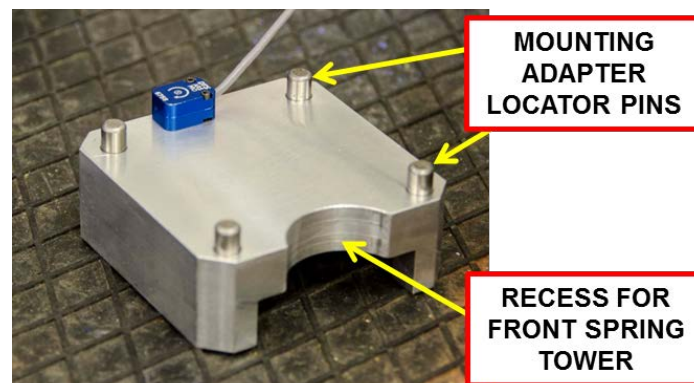


Figure 6-24. Angular rate sensor installation on neck mounting adapter

6.6.1.14 Install the neck mounting adapter (DL472-1170) to the neck using four M6 x 1 x 25 mm FHCS (Figure 6-25). The semi-circular recess is oriented towards the front of the neck next to the front spring tower. This will locate the ARS closest to the rear spring tower.

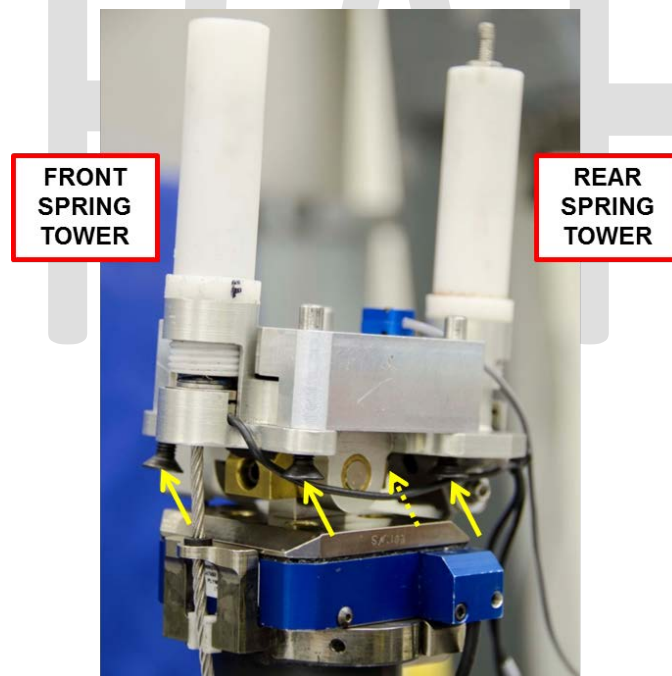


Figure 6-25. Neck mounting adapter installed on head/neck mounting assembly.

6.6.1.15 Attach the lower neck load cell to the end plate assembly (DL472-1130) using four M6 x 1 x 25 mm SHCS (Figure 6-26). Orient the neck so that the front spring tower is facing the locator pins (Figure 6-27).

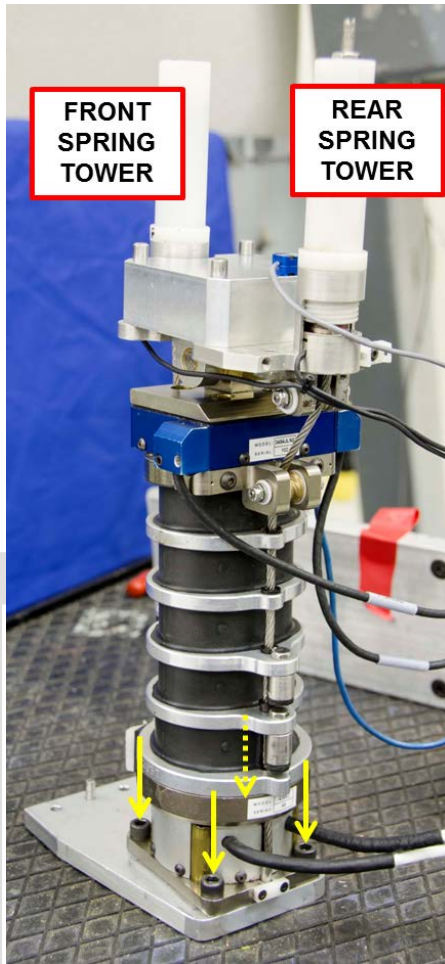


Figure 6-26. Attachment of lower neck load cell to neck end plate assembly



Figure 6-27. Orientation of neck relative to locator pins

6.6.1.16 Mount the neck torsion fixture (DL472-1000) to the bottom of the neck pendulum using four 1/4-20 x 5/8" SHCS (Figure 6-28). Orient the long axis of the torsion fixture top plate (DL472-1110) perpendicular to the direction of motion of the pendulum (Figure 6-29).

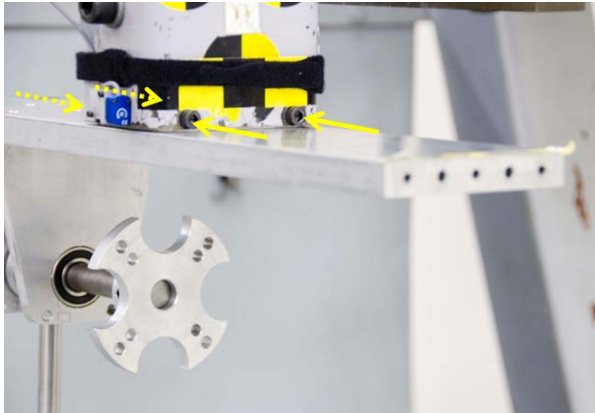


Figure 6-28. Attachment of torsion fixture to neck pendulum

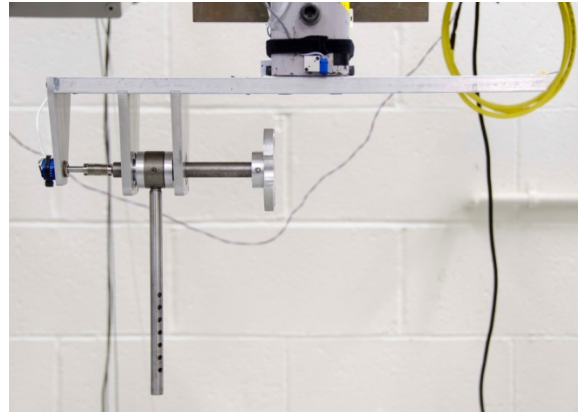


Figure 6-29. Long axis of torsion fixture top plate perpendicular to motion of neck pendulum

6.6.1.17 Install the neck into the fixture by aligning the locator pins on the end plate assembly at the base of the neck into the end of the torsion fixture top plate (Figure 6-30). Orient the neck so that the rear spring tower faces the ground.

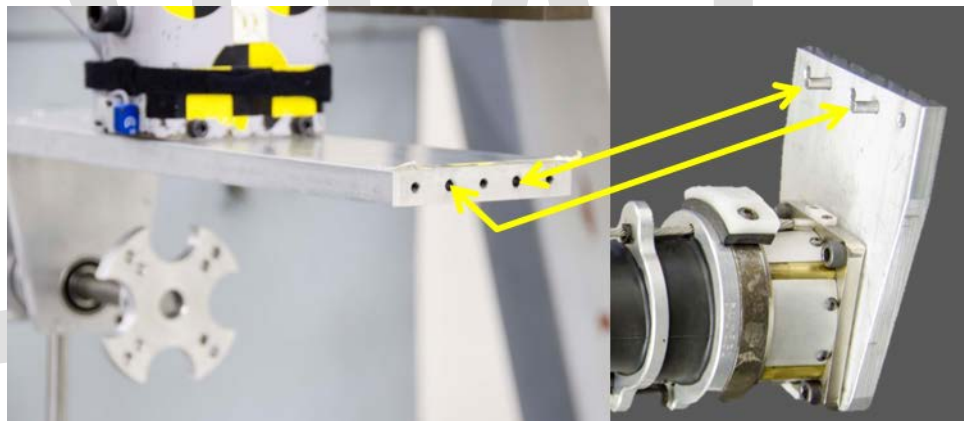


Figure 6-30. Alignment of locator pins with end plate of neck torsion fixture

6.6.1.18 While positioning the end plate assembly in Step 6.6.1.17, simultaneously align the neck mounting adapter locator pins into the neck attachment plate (DL472-1151) (Figure 6-31 and Figure 6-32).

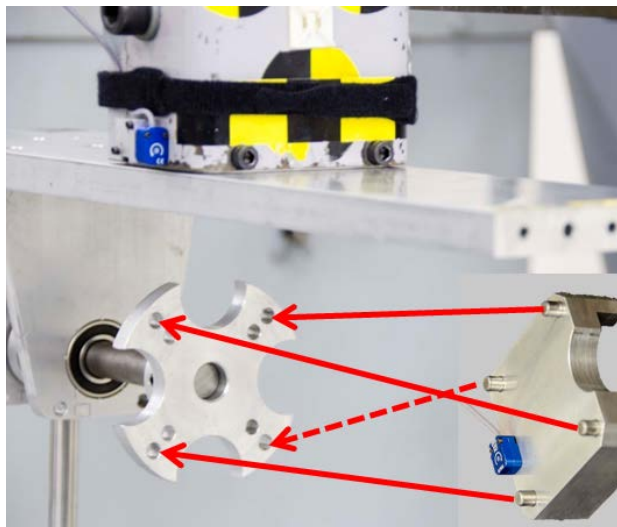


Figure 6-31. Alignment of neck mounting adapter locator pins with neck attachment plate locator holes

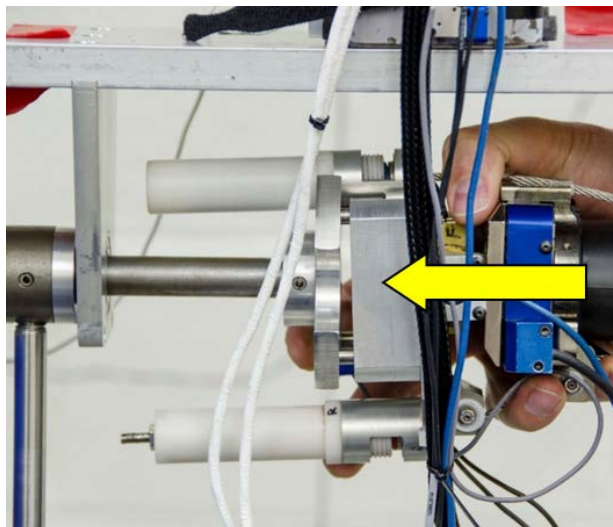


Figure 6-32. Installation of neck assembly into the torsion fixture

6.6.1.19 Once the locator pins have been placed within the locator holes, install the three #10-24 x 1" SHCS through the end plate assembly into the top plate to secure the neck into the fixture (Figure 6-33).

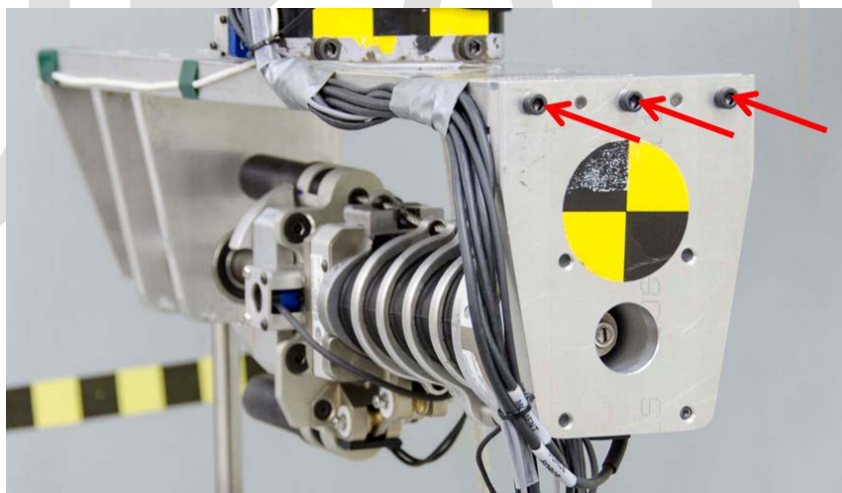


Figure 6-33. Attachment of end plate to secure the neck into the torsion fixture

6.6.1.20 Tape and route the cables so they do not interfere with the neck during test. Leave at least 30 centimeters (12 inches) of slack in the bundle of wires from the upper neck (upper neck load cell, OC potentiometer, ARS, and spring tower load cells) so that the cables do not become taut when the neck is twisted about the Z-axis (Figure 6-34). No slack is necessary in the lower neck bundle, but ensure that the wires are secured to the neck torsion fixture and do not interfere with rotation of the neck.

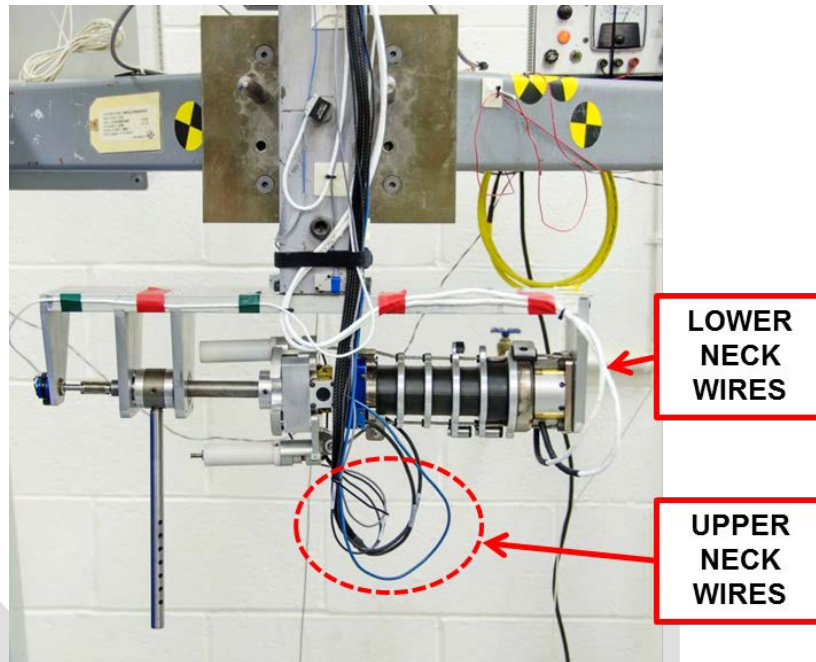


Figure 6-34. Tape wiring to minimize interference during test

6.6.1.21 Slide the 1.5 ± 0.05 kg pendulum weight onto the pendulum rod. Position the weight so that the 10-24 x $1\frac{1}{2}$ " SHCS can be installed through the weight into the second hole from the top of the rod. This corresponds to 140 mm from the centerline of the shaft assembly (Figure 6-35).

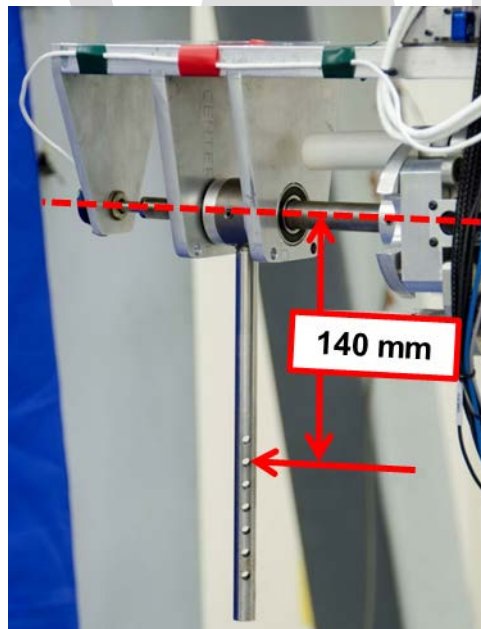


Figure 6-35. Pendulum rod hole position

- 6.6.1.22 Record the “as measured (AM)” channels listed in Table 6-1 in accordance with SAE-J211. Determine the time of first contact between the striker and the honeycomb (or equivalent deceleration device) using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 6.6.1.23 Ensure that at least 30 minutes have passed since the last test involving the neck.
- 6.6.1.24 Release the pendulum from a height to generate a 5.00 ± 0.05 m/s velocity at impact.
- 6.6.1.25 The procedure and pictures above describe the right neck torsion test (Figure 6-36). To conduct the left neck torsion test (Figure 6-37), remove the four 1/4-20 x 5/8” SHCS attaching the neck torsion fixture to the bottom of the neck pendulum, rotate the fixture 180° about the pendulum z-axis, and reinstall the four 1/4-20 x 5/8” SHCS (Figure 6-28). Repeat Steps 6.6.1.22 and 6.6.1.23.

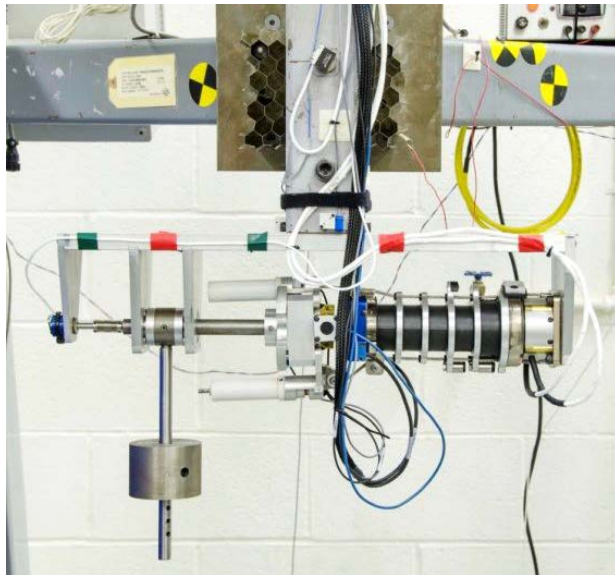


Figure 6-36. Torsion test for twist to the right

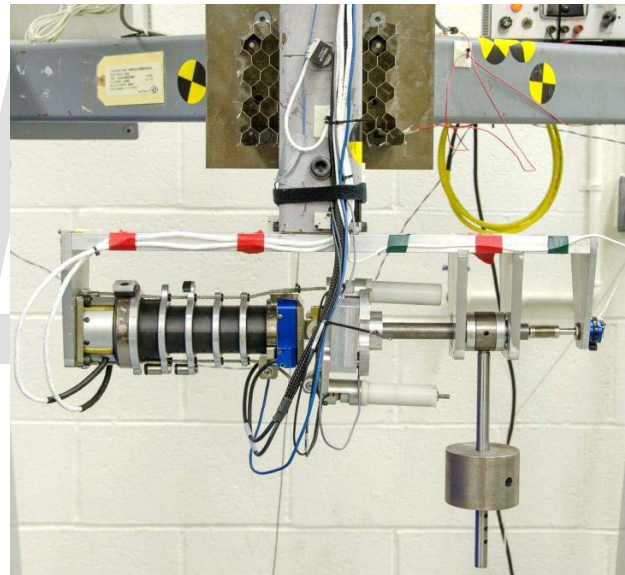


Figure 6-37. Torsion test for twist to the left

6.6.2 Torsion Data Processing

- 6.6.2.1 Time zero (T0) is defined as the time when the striker contacts the honeycomb. If this results in a time shift from the original DAS-recorded time, apply this time shift to all measured channels listed in Table 6-1.
- 6.6.2.2 Remove data channel offset per SAE J211 Section 8.4.3.
- 6.6.2.3 Filter channels based on the CFC filter classes listed in Table 6-1.
- 6.6.2.4 Calculate the pendulum velocity using the pendulum accelerometer:

$$Pendulum\ X\ Velocity = \int Pend_{X\ ACCEL} dt$$

Table 6-1. Required Measurement Channels for the Neck Torsion Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer, X-axis	60	T0SENSMI0000ACXD	XG	AM	PEND	AC	G'S
Pendulum Velocity, X-axis	N/A	T0SENSMI0000VAXD	XG	CM	PEND	PP	MPS
Upper Neck Moment, Z-axis	600	D0NECKUP00THMOZB	ZL	AM	NEKU	LC	NWM
Upper Neck Angular Velocity, Z-axis (ARS)	60	D0NECKUP00THAVZD	ZL	AM	NEKU	AV	DPS
Neck Fixture Rotation	60	T0SENSMI0000ANZD	ZL	AM	PEND	AD	DEG

6.6.3 Torsion Test Performance Specification

The pendulum pulse must be within the ranges indicated in Table 6-2 and Figure 6-50. The neck torsion response must be within the ranges provided in Table 6-3.

Table 6-2. Pendulum Pulse for Neck Torsion Qualification Test

Parameter	Units	Specification	
		Min.	Max.
Pendulum velocity at 10 ms after T0	m/s	1.72	1.98
Pendulum velocity at 15 ms after T0	m/s	2.67	2.97
Pendulum velocity at 20 ms after T0	m/s	3.59	3.98
Pendulum velocity at 25 ms after T0	m/s	4.43	4.92

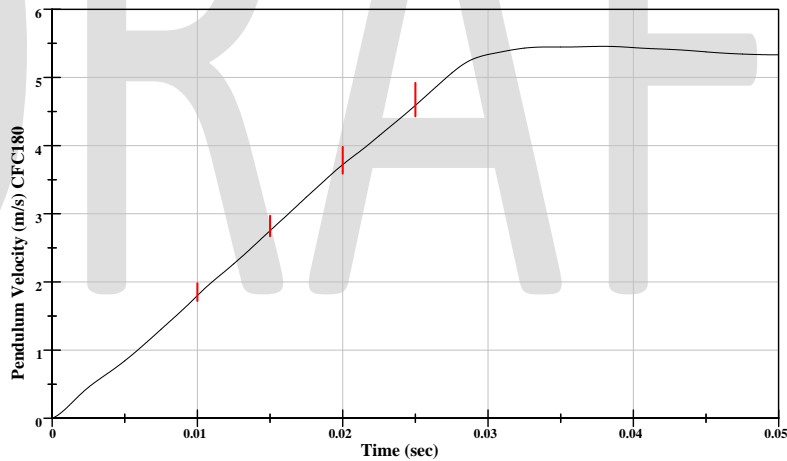
**Figure 6-38. THOR-50M neck torsion pulse specification requirement**

Table 6-3. Neck Torsion Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	4.95	5.05
Peak Upper Neck M_z ¹⁴	N-m	36.1	39.0
Peak Neck Fixture Rotation ¹⁴	deg	46.0	56.3
Decay time to 0° from peak rotation (Figure 6-39)	ms	50.9	62.2
Peak Upper Neck Angular Velocity ω_z ¹⁴	deg/s	1431	1591

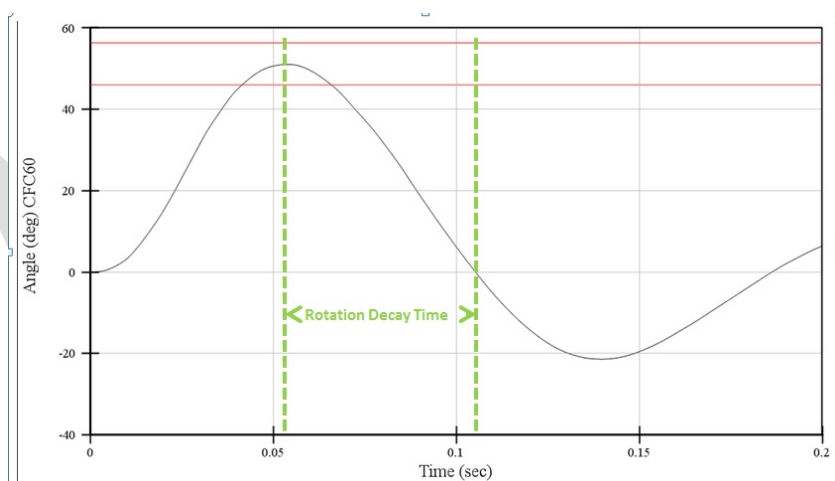


Figure 6-39. Neck torsion test neck fixture rotation decay requirements

¹⁴ Specifications are presented as absolute values to accommodate both left and right side tests.

6.7 Neck Frontal Flexion Test

6.7.1 Neck Frontal Test Procedure

- 6.7.1.1 Inspect the neck assembly for wear, tears, or other damage and for any de-bonding between the rubber pucks and metal plates¹⁵. Inspect the front and rear springs (including the inserted rubber tubes) within the head assembly for any wear or other damage. Inspect the front and rear OC stops at the bottom of the head also for wear and damage; if necessary take appropriate action to refurbish the parts¹⁵.
- 6.7.1.2 Soak the head and neck assembly in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 6.7.1.3 If head and neck assembly are already attached, skip to the next step. Otherwise, attach the head to the neck assembly by aligning the front neck spring tower with the hole in the base of the skull and sliding the neck towards the head in a direction parallel to the neck column (Figure 6-40). Install four M6 x 1 x 25 mm FHCS at the bottom of the head/neck mounting platform (Figure 6-41) and torque to 20.3 N-m (15.0 ft-lbf).

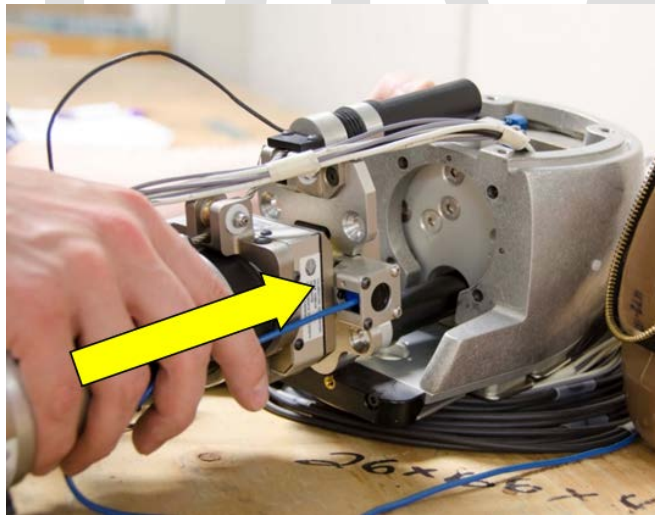


Figure 6-40. Alignment and installation of neck assembly to skull assembly

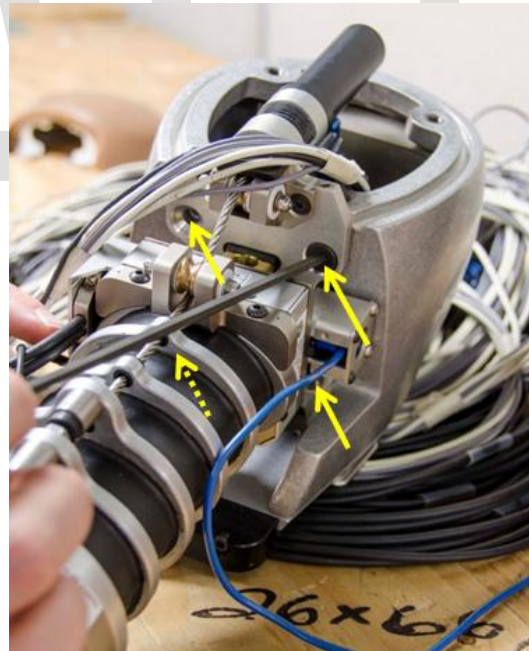


Figure 6-41. FHCS connecting head/neck mounting platform to skull assembly

¹⁵ See *Procedures for Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

- 6.7.1.4 If head skin is already installed, skip to the next step. Otherwise, ensure that the face foam (472-1401) is positioned in the head skin assembly (472-1320). Install head skin assembly by positioning in front of and below skull and moving over the skull in an up-and-back motion until the head skin posterior flaps are positioned along the posterior groove of the skull. Install head cap (472-1110) using four M6 x 1 x 16 mm SHCS torqued to 20.3 N-m (15.0 ft-lbf).
- 6.7.1.5 Install the appropriate size 152.4 mm (6 in) aluminum honeycomb¹⁶ (or equivalent) to meet the pendulum pulse specified in **Table 6-5** and **Figure 6-43** for an impact velocity of 5.00 ± 0.05 m/s. Ensure that the contact area of the aluminum honeycomb covers the impactor plate on the pendulum upon impact.
- 6.7.1.6 Mount the bottom of the neck assembly rigidly to the end plate of the head/neck pendulum using four M6 x 1 x 25 mm SHCS torqued to 20.3 N-m (15.0 ft-lbf). For the frontal flexion test, the neck is placed such that the midsagittal plane of the head is vertical ($\pm 0.5^\circ$) and coincides with the plane of motion of the pendulum's longitudinal axis, with the positive longitudinal axis of the head coordinate system pointing in the direction of travel of the pendulum (Figure 6-42).

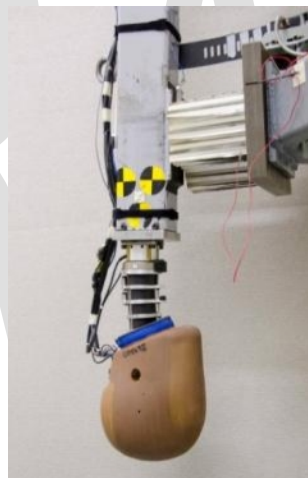


Figure 6-42. Head-neck assembly orientation for neck flexion tests

- 6.7.1.7 Record the “as measured (AM)” channels listed in **Table 6-4** in accordance with SAE-J211. Determine the time of first contact between the striker and the honeycomb (or equivalent deceleration device) using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 6.7.1.8 Ensure that at least 30 minutes have passed since the last neck qualification test.
- 6.7.1.9 Release the pendulum from a height to generate a 5.00 ± 0.05 m/s velocity at impact.

¹⁶ As a starting point, use the same aluminum honeycomb configuration used in the Hybrid III 50th neck flexion test.

6.7.2 Neck Frontal Flexion Data Processing

6.7.2.1 Time zero (T0) is defined as the time when the striker contacts the honeycomb. If this results in a time shift from the original DAS-recorded time, apply this time shift to all measured channels listed in Table 6-4.

6.7.2.2 Confirm that the polarity of the pendulum ARS is set such that the angular velocity of the pendulum as it falls towards the decelerator is positive.

6.7.2.3 Remove data channel offset per SAE J211 Section 8.4.3.

6.7.2.4 Filter channels based on the CFC filter classes listed in Table 6-4.

6.7.2.5 Calculate the pendulum velocity using the pendulum accelerometer:

$$\text{Pendulum X Velocity} = \int \text{Pend}_X \text{ ACCEL } dt$$

6.7.2.6 Calculate the head rotation angle relative to the pendulum:

$$\text{Head Rotation} = \int_{T_0} -\omega_{y,\text{head}} - \omega_{y,\text{pendulum}} dt$$

Table 6-4. Required Measurement Channels for the Neck Flexion Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer, X-axis	60	T0SENSMI0000ACXD	XG	AM	PEND	AC	G'S
Pendulum Velocity, X-axis	N/A	T0SENSMI0000VAXD	XG	CM	PEND	PP	MPS
Upper Neck Force, X-axis	1000	DONECKUP00THFOXA	XL	AM	NEKU	LC	NWT
Upper Neck Force, Z-axis	1000	DONECKUP00THFOZA	ZL	AM	NEKU	LC	NWT
Upper Neck Moment, Y-axis	600	DONECKUP00THMOYB	YL	AM	NEKU	LC	NWM
Neck Cable Force, Posterior	1000	DONECKRE00THFOZA	NA	AM	NKCP	LC	NWT
Head Angular Velocity, Y-axis (ARS)	60	D0HEAD0000THAVYD	YL	AM	HDCG	AV	DPS
Pendulum Angular Velocity (ARS)	60	T0SENSMI00THAVYD	YG	AM	PEND	AV	DPS
Head Rotation (relative to pendulum)	N/A	D0HEAD0000THANYD	YL	CM	HDCG	PP	DEG

6.7.3 Neck Frontal Flexion Test Performance Specification

The pendulum pulse must achieve a velocity time-history that meets all three of the requirements in **Table 6-5** and **Figure 6-43**. The neck flexion response must be within the ranges provided in Table 6-6.

Table 6-5. Neck Flexion Input Requirements

Parameter	Units	Specification	
		Min.	Max.
Pendulum velocity at 8 ms after T0	m/s	1.49	1.85
Pendulum velocity at 16 ms after T0	m/s	3.08	3.86
Pendulum velocity at 24 ms after T0	m/s	4.48	5.26

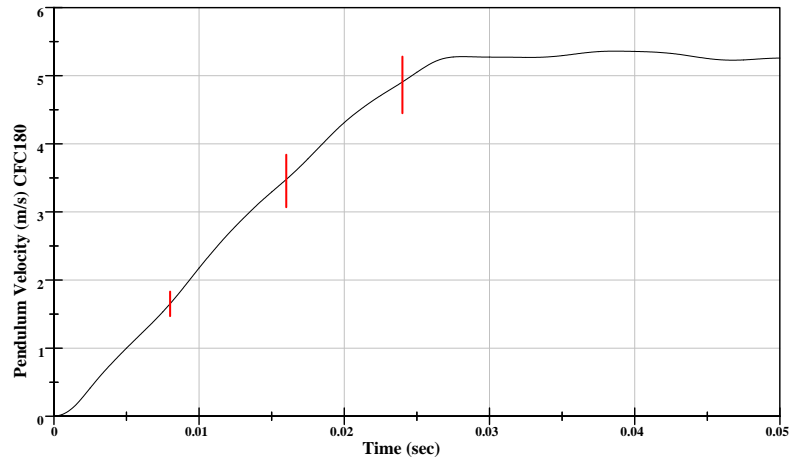


Figure 6-43. Neck frontal flexion test pulse requirement

Table 6-6. Neck Flexion Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	4.95	5.05
Peak Upper Neck M_y	N-m	26.2	30.5
Peak Upper Neck F_x	N	-1375	-1195
Maximum Upper Neck F_z	N	835	1020
Posterior Neck Cable F_z first peak before 60.0 ms	N	1157	1375
Peak Head Angular Rate ω_y	deg/s	-2017	-1828
Peak Head Rotation (relative to pendulum)	deg	-65.8	-61.5
Decay time to 0° from peak angle (Figure 6-44)	ms	77.6	87.2

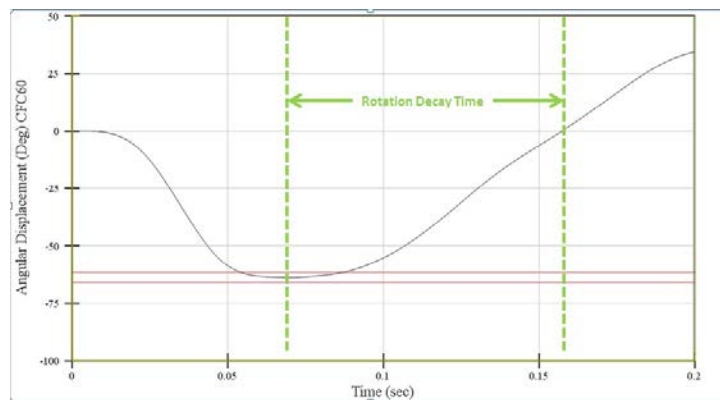


Figure 6-44. Neck flexion test head rotation relative to pendulum response requirement

6.8 Neck Extension Test

6.8.1 Neck Extension Test Procedure

- 6.8.1.1 Inspect the neck assembly for wear, tears, or other damage and for any de-bonding between the rubber pucks and metal plates. Inspect the front and rear springs (including the inserted rubber tubes) within the head assembly for any wear or other damage. Inspect the front and rear OC stops at the bottom of the head also for wear and damage; if necessary take appropriate action to refurbish the parts¹⁷.
- 6.8.1.2 Soak the head and neck assembly in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 6.8.1.3 If head/neck assembly is already installed from a previous neck extension, flexion, or lateral flexion test, proceed to the next step. Otherwise, follow the instructions provided in Steps 6.7.1.3 and 6.7.1.4 to assemble the head and neck.
- 6.8.1.4 Install the appropriate 152.4 mm (6 in) size aluminum honeycomb¹⁸ to meet the pendulum pulse specified in **Table 6-8** and **Figure 6-46** for an impact velocity of 5.00 ± 0.05 m/s. Ensure that the contact area of the aluminum honeycomb covers the impactor plate on the pendulum upon impact.
- 6.8.1.5 Mount the bottom of the neck assembly rigidly to the end plate of the head/neck pendulum using four M6 x 1 x 25 mm SHCS torqued to 20.3 N-m (15.0 ft-lbf). For the extension test, the neck is placed such that the midsagittal plane of the head is vertical ($\pm 0.5^\circ$) and coincides with the plane of motion of the pendulum's longitudinal axis, with the positive longitudinal axis of the head pointing opposite the direction of travel of the pendulum (**Figure 6-45**).

¹⁷ See *Procedures for Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

¹⁸ As a starting point, use the same aluminum honeycomb configuration used in the Hybrid III neck extension test.

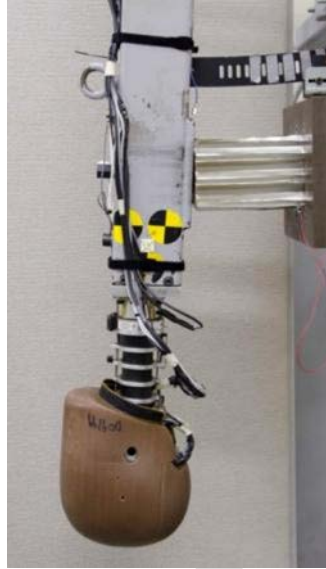


Figure 6-45. Mounting the head-neck assembly for neck extension tests

- 6.8.1.6 Record the “as measured (AM)” channels listed in **Table 6-7** in accordance with SAE-J211. Determine the time of first contact between the striker and the honeycomb (or equivalent deceleration device) using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 6.8.1.7 Ensure that at least 30 minutes have passed since the last neck qualification test.
- 6.8.1.8 Release the pendulum from a height to generate a 5.00 ± 0.05 m/s velocity at impact.

6.8.2 **Neck Extension Data Processing**

- 6.8.2.1 Time zero (T0) is defined as the time when the striker contacts the honeycomb. If this results in a time shift from the original DAS-recorded time, apply this time shift to all measured channels listed in Table 6-7.
- 6.8.2.2 Confirm that the polarity of the pendulum ARS is set such that the angular velocity of the pendulum as it falls towards the decelerator is positive.
- 6.8.2.3 Remove data channel offset per SAE J211 Section 8.4.3.
- 6.8.2.4 Filter channels based on the CFC filter classes listed in Table 6-7.
- 6.8.2.5 Calculate the pendulum velocity using the pendulum accelerometer:

$$Pendulum\ X\ Velocity = \int Pend_{X\ ACCEL} dt$$

6.8.2.6 Calculate the head rotation angle relative to the pendulum:

$$Head\ Rotation = \int_{T_0} \omega_{y,head} - \omega_{y,pendulum} dt$$

Table 6-7. Required Measurement Channels for the Neck Extension Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer, X-axis	60	T0SENSMI0000ACXD	XG	AM	PEND	AC	G'S
Pendulum Velocity, X-axis	N/A	T0SENSMI0000VAXD	XG	CM	PEND	PP	MPS
Upper Neck Force, X-axis	1000	DONECKUP00THFOXA	XL	AM	NEKU	LC	NWT
Upper Neck Force, Z-axis	1000	DONECKUP00THFOZA	ZL	AM	NEKU	LC	NWT
Upper Neck Moment, Y-axis	600	DONECKUP00THMOYB	YL	AM	NEKU	LC	NWM
Neck Cable Force, Anterior	1000	DONECKFR00THFOZA	NA	AM	NKCA	LC	NWT
Head Angular Velocity, Y-axis (ARS)	60	D0HEAD0000THAVYD	YL	AM	HDCG	AV	DPS
Pendulum Angular Velocity (ARS)	60	T0SENSMI00THAVYD	YG	AM	PEND	AV	DPS
Head Rotation (relative to pendulum)	N/A	D0HEAD0000THANYD	YL	CM	HDCG	PP	DEG

6.8.3 Neck Extension Test Performance Specification

The pendulum pulse must be within the ranges indicated in Table 6-8 and Figure 6-46. The neck extension response must be within the ranges provided in Table 6-9.

Table 6-8. Pendulum Pulse for Neck Extension Qualification Test

Parameter	Units	Specification	
		Min.	Max.
Pendulum velocity at 10 ms after T0	m/s	1.76	1.91
Pendulum velocity at 20 ms after T0	m/s	3.50	3.75
Pendulum velocity at 30 ms after T0	m/s	4.88	5.20

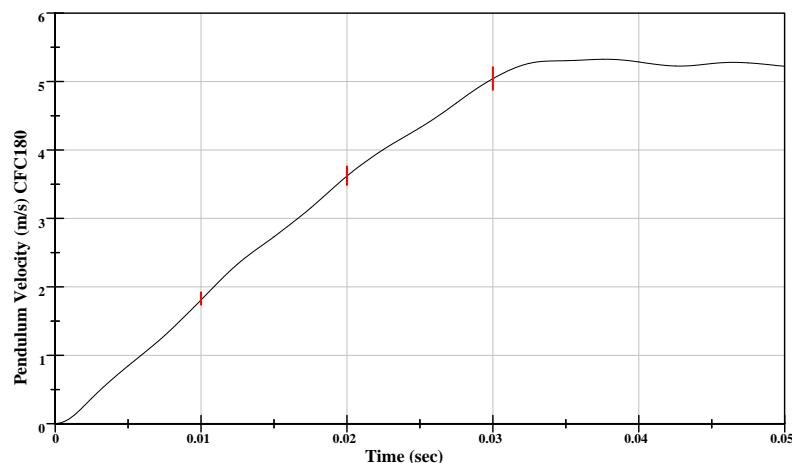
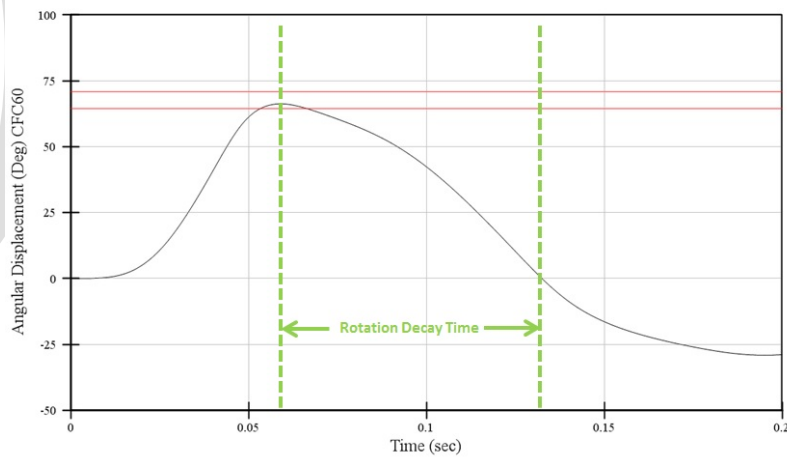


Figure 6-46. Neck extension test pulse requirement

Table 6-9. Neck Extension Response Requirements***

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	4.95	5.05
Peak Upper Neck M_y	N-m	-32.5	-26.6
Peak Upper Neck F_x	N	699	854
Peak Upper Neck F_z	N	-3115	-2549
Peak Anterior Neck Cable F_z	N	2074	2535
Peak Head Angular Rate ω_y	deg/s	2084	2247
Peak Head Rotation (relative to pendulum)	deg	64.5	70.9
Decay time to 0° from peak angle (Figure 6-47)	ms	74.2	78.7

*** Performance specifications based on VRTC tests only due to issues with the extension side of the OC Stop Assembly, discovered after the Calspan and HIS testing was completed

**Figure 6-47. Neck extension test head Y-axis angle relative to pendulum response requirement**

6.9 Neck Lateral Flexion Test

6.9.1 Neck Lateral Flexion Test Procedure

- 6.9.1.1 Inspect the neck assembly for wear, tears, or other damage and for any de-bonding between the rubber pucks and metal plates. Inspect the front and rear springs (including the inserted rubber tubes) within the head assembly for any wear or other damage. Inspect the front and rear OC stops at the bottom of the head also for wear and damage; if necessary take appropriate action to refurbish the parts¹⁹.
- 6.9.1.2 Soak the head and neck assembly in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 6.9.1.3 If head/neck assembly is already installed from a previous neck extension, flexion, or lateral flexion test, proceed to the next step. Otherwise, follow the instructions provided in Steps 6.7.1.3 and 6.7.1.4 to assemble the head and neck.
- 6.9.1.4 Install the appropriate 76.2 mm (3 in) size aluminum honeycomb²⁰ to meet the pendulum pulse specified in **Table 6-11** and Figure 6-50 for an impact velocity of 3.40 ± 0.05 m/s. Ensure that the contact area of the aluminum honeycomb covers the impactor plate on the pendulum upon impact.
- 6.9.1.5 Mount the bottom of the neck assembly rigidly to the end plate of the head/neck pendulum using four M6 x 1 x 25 mm SHCS torqued to 20.3 N-m (15.0 ft-lbf). For the lateral flexion test, the neck is placed such that the midsagittal plane of the head is vertical and anterior-posterior direction of the assembly is pointing $90 \pm 0.5^\circ$ from the direction of travel of the pendulum. The neck is tested in both left and right lateral modes (Figure 6-48 and Figure 6-49).

¹⁹ See *Procedures for Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

²⁰ As a starting point, use the same aluminum honeycomb configuration used in the ES-2re lateral flexion neck test.

Neck Lateral Flexion, Left

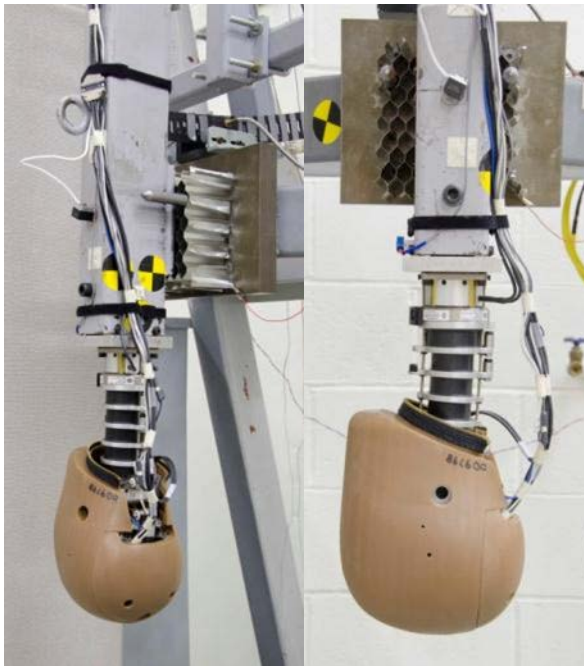


Figure 6-48. Left neck lateral flexion setup.

Neck Lateral Flexion, Right

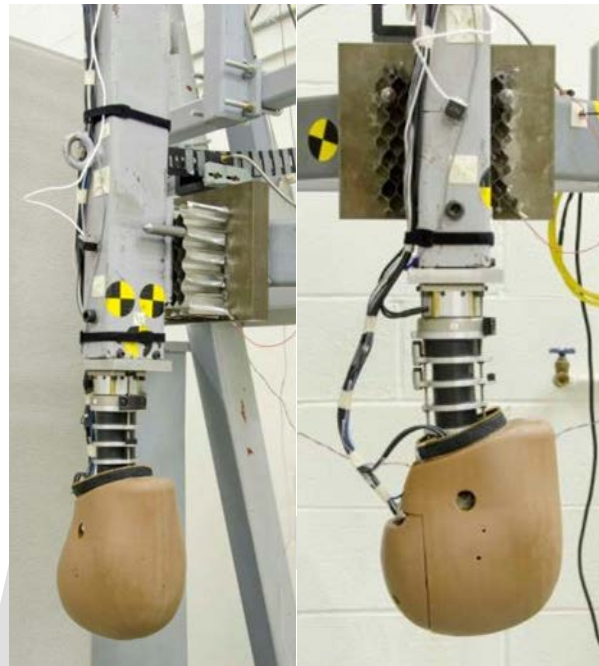


Figure 6-49. Right neck lateral flexion setup.

6.9.1.6 Record the “as measured (AM)” channels listed in **Table 6-10** in accordance with SAE-J211. Determine the time of first contact between the striker and the honeycomb (or equivalent deceleration device) using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.

6.9.1.7 Ensure that at least 30 minutes have passed since the last neck qualification test.

6.9.1.8 Release the pendulum from a height to generate a 3.40 ± 0.05 m/s velocity at impact.

6.9.1.9 Repeat Section 6.9 for the opposite direction of loading.

6.9.2 Neck Lateral Flexion Data Processing

6.9.2.1 Time zero (T0) is defined as the time when the striker contacts the honeycomb. If this results in a time shift from the original DAS-recorded time, apply this time shift to all measured channels listed in Table 6-10.

6.9.2.2 Confirm that the polarity of the pendulum ARS is set such that the angular velocity of the pendulum as it falls towards the decelerator is positive.

6.9.2.3 Remove data channel offset per SAE J211 Section 8.4.3.

6.9.2.4 Filter channels based on the CFC filter classes listed in Table 6-10.

6.9.2.5 Calculate the pendulum velocity using the pendulum accelerometer:

$$\text{Pendulum X Velocity} = \int \text{Pend}_{X \text{ ACCEL}} dt$$

6.9.2.6 Calculate the head rotation angle relative to the pendulum:

$$\begin{aligned} \text{Left: Head Rotation} &= \int_{T_0} -\omega_{x,\text{head}} - \omega_{y,\text{pendulum}} dt \\ \text{Right: Head Rotation} &= \int_{T_0} \omega_{x,\text{head}} - \omega_{y,\text{pendulum}} dt \end{aligned}$$

Table 6-10. Required Measurement Channels for the Neck Lateral Flexion Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer, X-axis	60	T0SENSMI0000ACXD	XG	AM	PEND	AC	G'S
Pendulum Velocity, X-axis	N/A	T0SENSMI0000VAXD	XG	CM	PEND	PP	MPS
Upper Neck Moment, X-axis	600	D0NECKUP00THMOXB	XL	AM	NEKU	LC	NWM
Head Angular Velocity, X-axis (ARS)	60	D0HEAD0000THAVXD	XL	AM	HDCG	AV	DPS
Pendulum Angular Velocity (ARS)	60	T0SENSMI00THAVYD	YG	AM	PEND	AV	DPS
Head Rotation (relative to pendulum)	N/A	D0HEAD0000THANXD	XL	CM	HDCG	PP	DEG

6.9.3 Neck Lateral Flexion Test Performance Specification

The pendulum pulse must be within the ranges indicated in **Table 6-11** and **Figure 6-50**. The neck lateral flexion response must be within the ranges provided in **Table 6-12**.

Table 6-11. Pendulum Pulse for Neck Lateral Flexion Qualification Test

Parameter	Units	Specification	
		Min.	Max.
Pendulum velocity at 4 ms after T0	m/s	0.89	1.08
Pendulum velocity at 8 ms after T0	m/s	2.04	2.36
Pendulum velocity at 12 ms after T0	m/s	3.21	3.46

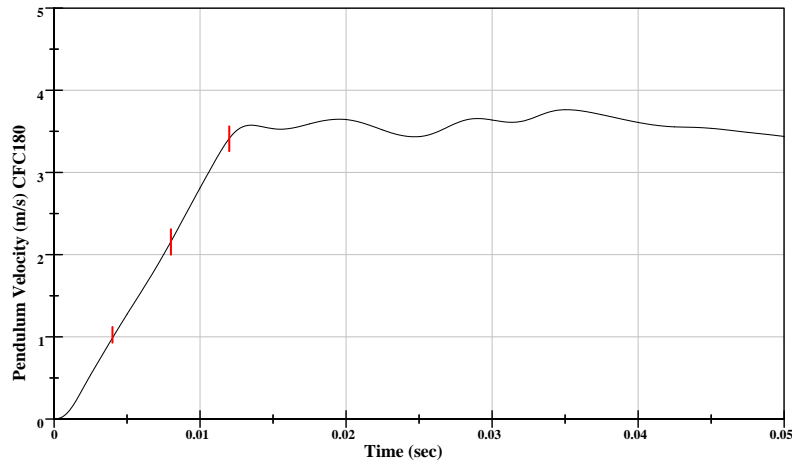


Figure 6-50. Neck lateral flexion pulse requirement

Table 6-12. Neck Lateral Flexion Response Requirements***

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	3.35	3.45
Upper Neck M_x first peak after 40.0 ms ²¹	N-m	43.2	52.2
Peak Head Angular Rate ω_x ²¹	deg/s	1300	1434
Peak Head Rotation ²¹ (relative to pendulum)	deg	40.9	47.0
Decay time to 0° from peak angle (Figure 6-51)	ms	78.0	83.4

*** Performance specifications only include 4 out of 10 tests conducted at HIS due to input pulse not within specifications

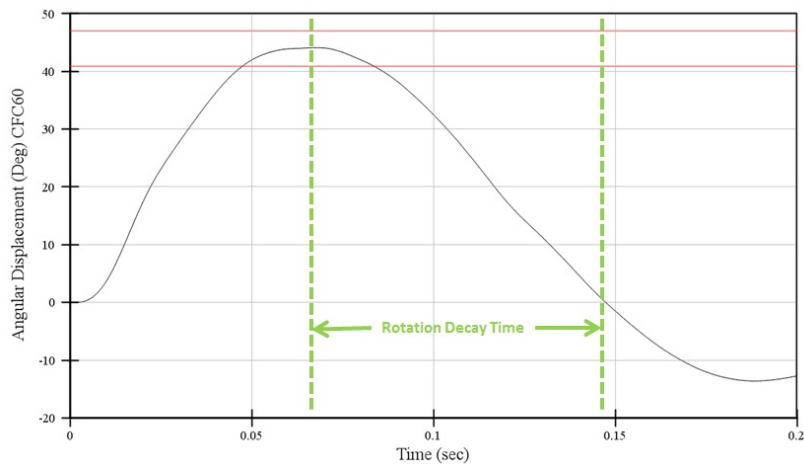



Figure 6-51. Neck lateral flexion test head X-axis angle relative to pendulum response requirement

²¹ Specifications are presented as absolute values to accommodate both left and right side tests.

7 UPPER THORAX QUALIFICATION

7.1 Description

The upper thorax qualification test is a blunt impact to the center of the rib cage. In this test, an impactor with a mass of 23.36 ± 0.02 kg and a 152.40 ± 0.25 mm diameter rigid disk impact interface (same impactor as used in a similar qualification test for the Hybrid III 50th percentile male ATD²²) contacts the ATD at mid-sternum level at 4.30 ± 0.05 m/s.

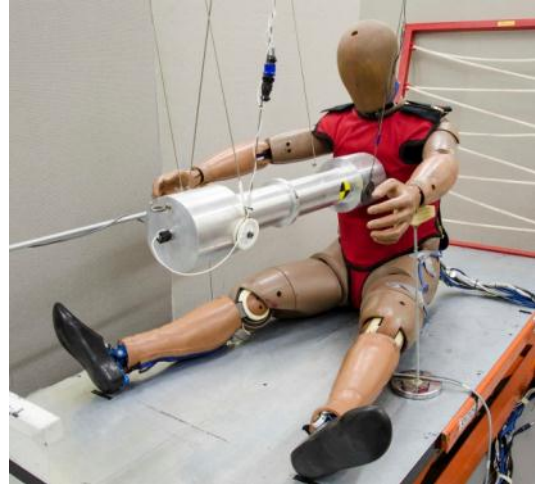

The primary response specifications for the upper thorax qualification test are the X-axis deflection of the left and right upper ribs in the local spine coordinate system, as measured by the InfraRed Telescoping Rod for Assessment of Chest Compression (IR-TRACC) assemblies, and the reaction force, as measured using the pendulum acceleration times its mass. The X-axis deflections of the left and right IR-TRACCs are assessed individually to ensure proper functionality, while facilitating diagnosis should the response not meet the qualification requirement.

7.2 Materials

- ☐ Fully-assembled THOR-50M ATD
- ☐ Impactor 23.36 ± 0.02 kg (51.50 ± 0.05 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables, as specified in Part 572²². The test probe is a 152.40 ± 0.25 mm (6.00 ± 0.01 in) diameter rigid cylinder. The impacting surface has a flat, right angle face with an edge radius of 12.7 ± 0.3 mm (0.5 ± 0.01 in).

7.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity
- ☐ A dual-axis tilt sensor on the thoracic spine (T6; 472-3775-1 or 472-3775-2) to measure initial angles about “X” and “Y” axes

²² Code of Federal Regulations, Anthropomorphic Test Devices, Title 49, §572.36(a).

- ☐ A dual-axis tilt sensor attached to the pelvis (472-3777-1 or 472-3777-2) to measure initial angle about “X” and “Y” axes
- ☐ 3-D IR-TRACC assemblies in the upper left (472-3550) and upper right (472-3560) thorax, installed as shown in 472-3000.

7.4 Pre-Test Procedures

- 7.4.1 Remove the jacket, if installed, and inspect the ribcage, bib, and jacket for wear, tears, or other damage. Prior to assembly, the profiles of the ribs should be examined to determine if they have been permanently deformed; if necessary take appropriate action to refurbish the part²³.
- 7.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 7.4.3 Set the lower thoracic spine (LTS) pitch change joint to the **slouched** position (see Section 3.1).
- 7.4.4 Set the neck pitch change joint to the **neutral** position (see Section 3.2).
- 7.4.5 Set the arm and shoulder joint torques as described in Section 3.3.

7.5 Test Procedure

- 7.5.1 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support, with all limbs extended horizontally and forward parallel to the midsagittal plane. The midsagittal plane shall be vertical within ± 1 degree (Figure 7-1).

²³ See *Procedures for, Assembly, Disassembly, and Inspection for the THOR-50M ATD* (PADI)

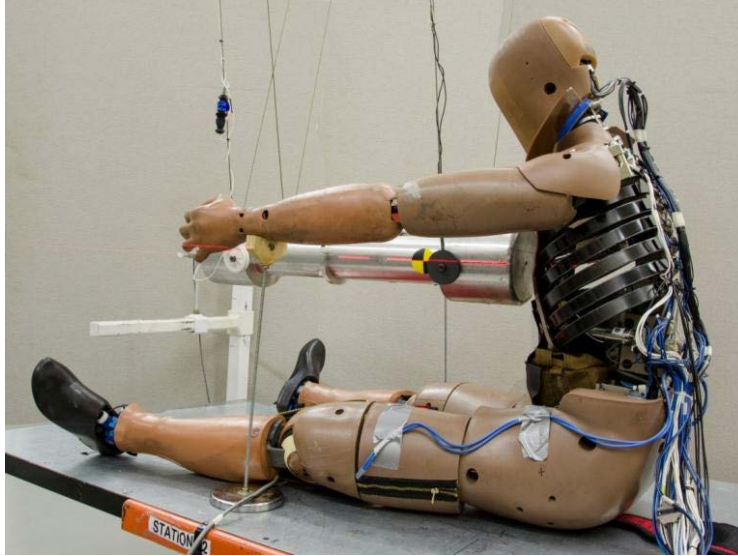


Figure 7-1. Initial setup for the upper thorax qualification test

- 7.5.2 If the jacket is installed, unzip the left and right shoulder and left and right torso zippers to expose the rib cage. If the jacket is not installed, position the crotch strap in place under the pelvis so that later jacket installation does not change torso position.
- 7.5.3 Support the forearms in a fully-extended orientation (Figure 7-1). If this cannot be achieved, or the torso cannot be stabilized in the following two steps, repeat the Arm and Shoulder Joint Torque Settings procedure in Section 3.3 before proceeding.
- 7.5.4 Set the pelvis so that the angle measured by the pelvis tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $15 \pm 1^\circ$ in the Y-axis.
- 7.5.5 Position the thorax so that the T6 tilt sensor (472-3775-1 or 472-3775-2) reads $-4 \pm 1^\circ$ (forward tilt about the Y-axis) and $0 \pm 0.5^\circ$ laterally (about the X-axis).
- 7.5.6 Adjust the table height or impactor height so that the center of the impact face is at the vertical level of the center of the third rib anteriorly, as indicated by the attachment bolts of the left and right upper thorax IR-TRACC assemblies (Figure 7-2).



Figure 7-2. Vertical alignment of impact location



Figure 7-3. Lateral alignment of impact location

- 7.5.7 Align the vertical centerline of the probe with the midsagittal plane of the dummy (**Figure 7-3**). The midsagittal plane can be visualized using the Nasion detent on the head skin, the front neck cable, the midpoint between the sternum-to-bib attachment bolts, and the pelvis flesh at the pubic symphysis.
- 7.5.8 Unzip the top shoulder portion of the jacket to allow the shoulder alignment marks to be viewed (Figure 7-4). Manipulate the upper arm in the anterior-posterior orientation until the interface between the rear ROM buffer (472-3816) and shoulder support (472-3814) is aligned with the scribe mark on the spring housing cover. If this cannot be achieved, repeat the procedures in Section 3.3 before proceeding.

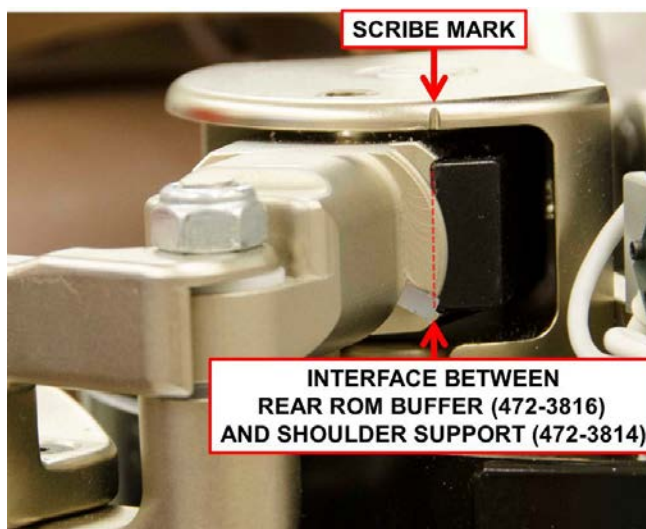


Figure 7-4. Align scribe mark to interface between rear ROM buffer and shoulder support.

- 7.5.9 Carefully reinstall the dummy's jacket by zipping the sides and shoulders of the jacket.
- 7.5.10 The motion of the impactor should be constrained so that there is no significant lateral, vertical, or rotational movement.
- 7.5.11 Record the "as measured (AM)" channels listed in **Table 7-2** in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 7.5.12 Confirm the test setup parameters illustrated in **Table 7-1**.

Table 7-1. Upper Thorax Qualification Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Slouched
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading: T6	$X = 0 \pm 0.5^\circ$; $Y = -4 \pm 1^\circ$
Tilt Sensor Reading: Pelvis	$X = 0 \pm 0.5^\circ$; $Y = 15 \pm 1^\circ$
Wait Time Between Tests	At Least 30 Minutes

- 7.5.13 Ensure that at least 30 minutes have passed since the last upper thorax or lower thorax test on this ATD.
- 7.5.14 Conduct the test at an impact velocity of 4.30 ± 0.05 m/s.

7.6 Data Processing

- 7.6.1 Remove data channel offset, but do not *zero* the IR-TRACC and potentiometer channels; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.
- 7.6.2 Filter channels based on the CFC filter classes listed in Table 7-2. Do not filter the raw IR-TRACC voltage, as this will be filtered after it is linearized and scaled during Step 7.6.4.
- 7.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 7.6.4 Calculate the upper left and upper right X-, and Z-axis thorax deflections in the *local spine coordinate system* (upper thoracic spine (UTS)) (see *THOR User's Manual*).
- 7.6.5 Calculate the absolute value of the difference between the peak left and right X-axis deflections in the *local coordinate system* (UTS).
- 7.6.6 Calculate the absolute value of the difference between the peak left and right Z-axis deflections in the *local coordinate system* (UTS).

Table 7-2. Required Measurement Channels for the Upper Thorax Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Upper left IR-TRACC tube	N/A	D0CHSTLEUPTHVO0C	NA	AM	CHLU	DS	VOL
Upper left Y-axis rotational potentiometer	180	D0CHSTLEUPTHANYC	YL	AM	CHLU	AD	DEG
Upper left Z-axis rotational potentiometer	180	D0CHSTLEUPTHANZC	ZL	AM	CHLU	AD	DEG
Upper right IR-TRACC tube	N/A	D0CHSTRIUPTHVO0C	NA	AM	CHRU	DS	VOL
Upper right Y-axis rotational potentiometer	180	D0CHSTRIUPTHANYC	YL	AM	CHRU	AD	DEG
Upper right Z-axis rotational potentiometer	180	D0CHSTRIUPTHANZC	ZL	AM	CHRU	AD	DEG
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G ' S
Pendulum Force	N/A	T0SENSMI0000FOXC	XG	CM	PEND	PP	NWT
Upper left X-axis rib deflection WRT UTS	N/A	D0CHSTLEUPTHDSXC	XL	CM	CHLU	PP	MM
Upper left Z-axis rib deflection WRT UTS	N/A	D0CHSTLEUPTHDSZC	ZL	CM	CHLU	PP	MM
Upper right X-axis rib deflection WRT UTS	N/A	D0CHSTRIUPTHDSXC	XL	CM	CHRU	PP	MM
Upper right Z-axis rib deflection WRT UTS	N/A	D0CHSTRIUPTHDSZC	ZL	CM	CHRU	PP	MM

7.7 Performance Specifications

Table 7-3. Upper Thorax Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	4.25	4.35
Peak Probe Force	N	2449	2855
Peak Upper Left X-axis Rib Deflection	mm	-46.4	-38.0
Peak Upper Right X-axis Rib Deflection	mm		
Difference Between Peak Left & Right X-axis Deflections	mm	N/A	< 7.00
Peak Upper Left Z-axis Rib Deflection	mm	26.2	32.0
Peak Upper Right Z-axis Rib Deflection	mm		
Difference Between Peak Left & Right Z-axis Deflections	mm	N/A	< 7.00

8 LOWER THORAX QUALIFICATION

8.1 Description

The lower ribcage impact qualification tests use the same impactor as the upper ribcage central impact test. This impactor has a mass of 23.36 ± 0.02 kg and a 152.40 ± 0.25 mm diameter rigid disk impact surface which contacts the ATD at 4.30 ± 0.05 m/s. In these tests, the impactor is centered over the lower left or right thorax IR-TRACC's attachment to the bib with the line of impact horizontal and parallel to the dummy's sagittal plane.



The X-axis deflections are calculated *in the local spine coordinate system* for both the left and right IR-TRACCs to examine the force-deflection response of the lower ribcage. The X-axis deflections of the left and right IR-TRACCs are assessed individually to ensure that both of the lower thorax IR-TRACCs are functioning properly, while facilitating diagnosis should the force-deflection response not meet the qualification requirement. This test is carried out for both left and right lower ribcage impacts.

8.2 Materials

- ☐ Fully-assembled THOR-50M ATD
- ☐ Impactor 23.36 ± 0.02 kg (51.5 ± 0.05 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables, as specified in Part 572²⁴. The test probe is a 152.4 ± 0.25 mm (6.0 ± 0.01 in) diameter rigid cylinder. The impacting surface has a flat, right angle face with an edge radius of 12.7 ± 0.3 mm (0.5 ± 0.01 in).

8.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity
- ☐ A dual-axis tilt sensor on the thoracic spine (T6; 472-3775-1 or 472-3775-2) to measure initial angles about “X” and “Y” axes

²⁴ Code of Federal Regulations, Anthropomorphic Test Devices, Title 49, §572.36(a).

- ☐ A dual-axis tilt sensor attached to the pelvis (472-3777-1 or 472-3777-2) to measure initial angle about “X” and “Y” axes
- ☐ 3-D IR-TRACC assemblies in the lower left (472-3580) and lower right (472-3570) thorax, installed as shown in 472-3000.

8.4 Pre-Test Procedures

- 8.4.1 Remove the jacket, if installed, and inspect the ribcage, bib, and jacket for wear, tears, or other damage. Prior to assembly, the profiles of the ribs should be examined to determine if they have been permanently deformed and if necessary take appropriate action to replace or refurbish the part²⁵.
- 8.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 8.4.3 Set the lower thoracic spine (LTS) pitch change joint to the **slouched** position (see Section 3.1).
- 8.4.4 Set the neck pitch change joint to the **neutral** position (see Section 3.2).
- 8.4.5 Set the arm and shoulder joint torques as described in Section 3.3.

8.5 Test Procedure

- 8.5.1 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support, with all limbs extended horizontally and forward parallel to the midsagittal plane. The midsagittal plane shall be vertical within ± 1 degree (Figure 8-1).

²⁵ See *Procedures for, Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

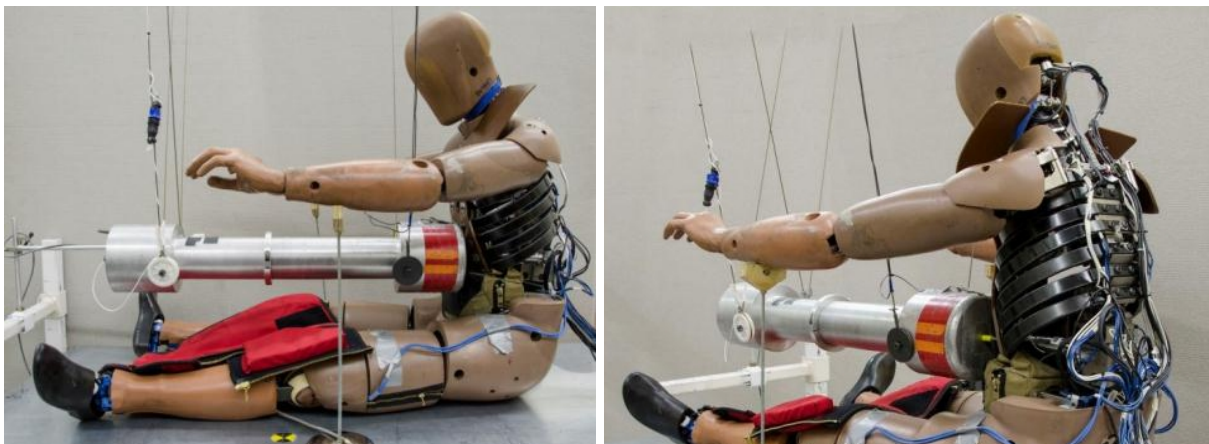


Figure 8-1. Initial setup for the upper thorax qualification test

- 8.5.2 If the jacket is installed, unzip the left and right shoulder and left and right torso zippers to expose the rib cage. If the jacket is not installed, position the crotch strap in place under the pelvis so that later jacket installation does not affect positioning.
- 8.5.3 Support the forearms in a fully-extended orientation (Figure 8-1). If this cannot be achieved, or the torso cannot be stabilized in the following two steps, repeat the Arm and Shoulder Joint Torque Settings procedure in Section 3.3 before proceeding.
- 8.5.4 Set the pelvis so that the angle measured by the pelvis tilt sensor is $0 \pm 0.5^\circ$ in the X-axis and $15 \pm 1^\circ$ in the Y-axis.
- 8.5.5 Position the thorax so that the T6 tilt sensor (472-3775-1 or 472-3775-2) reads $-4 \pm 1^\circ$ (forward tilt about the Y-axis) and $0 \pm 0.5^\circ$ laterally (about the X-axis).
- 8.5.6 Adjust the table height or impactor height so that the center of the impact face is at the vertical level of the center of the sixth rib anteriorly, as indicated by the attachment bolt of the lower left or right thorax IR-TRACC assembly (Figure 8-2).
- 8.5.7 Align the impact face with the center of the left or right lower thorax IR-TRACC bolt. A removable pointer (threaded into the centerline of the pendulum with approximately 30mm protruding) will aid this process (Figure 8-2). Remove the pointer tool when this step has been completed.



Figure 8-2. Alignment of impact location using pointer tool (shown in inset)

- 8.5.8 Unzip the top shoulder portion of the jacket to allow the shoulder alignment marks to be viewed (Figure 8-3). Manipulate the upper arm in the anterior-posterior orientation until the interface between the rear ROM buffer (472-3816) and shoulder support (472-3814) is aligned with the scribe mark on the spring housing cover. If this cannot be achieved, repeat the procedures in Section 3.3 before proceeding.

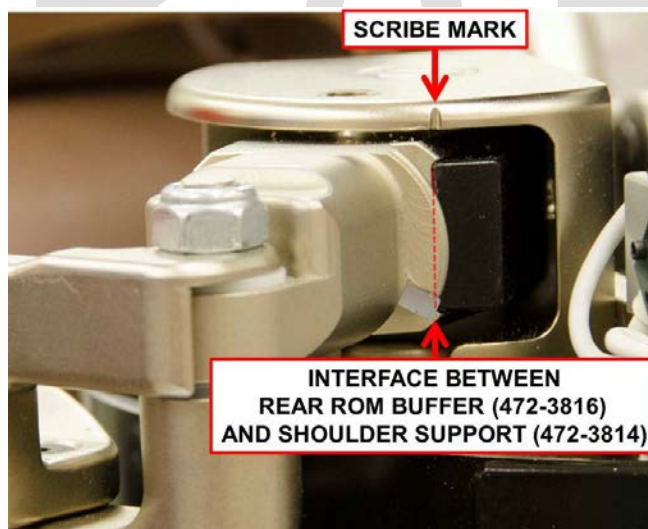


Figure 8-3. Align scribe mark to interface between rear ROM buffer and shoulder support.

- 8.5.9 Carefully reinstall the dummy's jacket by zipping the sides and shoulders of the jacket.
- 8.5.10 Align the frontal (coronal) plane of the dummy perpendicular to the impact direction. A right-angled guide placed behind the dummy's pelvis and aligned perpendicular to the line of impact may facilitate the process (**Figure 8-4**).



Figure 8-4. Alignment of the frontal plane perpendicular to the impact direction using a right-angled guide.

- 8.5.11 Remove the right-angled guide, if used.
- 8.5.12 Constrain the motion of the impactor so that there is no significant lateral, vertical, or rotational movement.
- 8.5.13 Record the “as measured (AM)” channels listed in **Table 8-2** (for left impacts) or Table 8-3 (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 8.5.14 Confirm the test setup parameters illustrated in **Table 8-1**.

Table 8-1. Lower Thorax Qualification Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Slouched
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading: T6	$X = 0 \pm 0.5^\circ$; $Y = -4 \pm 1^\circ$
Tilt Sensor Reading: Pelvis	$X = 0 \pm 0.5^\circ$; $Y = 15 \pm 1^\circ$
Wait Time Between Tests	At Least 30 Minutes

- 8.5.15 Ensure that at least 30 minutes have passed since the last upper thorax, lower thorax, or abdomen test on this ATD.
- 8.5.16 Conduct the test at an impact velocity of 4.30 ± 0.05 m/s.

8.5.17 Repeat 8.5 for the opposite side of the lower thorax.

8.6 Data Processing

- 8.6.1 Remove data channel offset, but do not *zero* the IR-TRACC and potentiometer channels; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.
- 8.6.2 Filter channels based on the CFC filter classes listed in Table 8-2 (for left impacts) or Table 8-3 (for right impacts). Do not filter the raw IR-TRACC voltage, as this will be filtered after it is linearized and scaled during Step 8.6.4.
- 8.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 8.6.4 Calculate the lower left or lower right X-axis deflections in the *local spine coordinate system* (lower thoracic spine (LTS)) (see *THOR User's Manual*).

Table 8-2. Required Measurement Channels for the Lower Left Thorax Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Lower left IR-TRACC tube	N/A	D0CHSTLELOTHVO0C	NA	AM	CHLL	DS	VOL
Lower left Y-axis rotational potentiometer	180	D0CHSTLELOTHANYC	YL	AM	CHLL	AD	DEG
Lower left Z-axis rotational potentiometer	180	D0CHSTLELOTHANZC	ZL	AM	CHLL	AD	DEG
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOXC	XG	CM	PEND	PP	NWT
Lower left X-axis rib deflection WRT LTS	N/A	D0CHSTLELOTHDSXC	XL	CM	CHLL	PP	MM

Table 8-3. Required Measurement Channels for the Lower Right Thorax Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Lower right IR-TRACC tube	N/A	D0CHSTRILOTHVO0C	NA	AM	CHRL	DS	VOL
Lower right Y-axis rotational potentiometer	180	D0CHSTRILOTHANYC	YL	AM	CHRL	AD	DEG
Lower right Z-axis rotational potentiometer	180	D0CHSTRILOTHANZC	ZL	AM	CHRL	AD	DEG
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOXC	XG	CM	PEND	PP	NWT
Lower right X-axis rib deflection WRT LTS	N/A	D0CHSTRILOTHDSXC	XL	CM	CHRL	PP	MM

8.7 Performance Specifications


Table 8-4. Lower Thorax Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	4.25	4.35
Peak X-axis Deflection	mm	-55.3	-45.4
Probe Force at time of Peak X-axis Deflection	N	3058	3680

9 ABDOMEN QUALIFICATION

9.1 Description

The lower abdomen impact qualification test utilizes a rectangular, horizontally-oriented rigid bar attached to an impactor (total mass of 32.00 ± 0.02 kg) to impact the lower abdomen of the THOR. The 3.30 ± 0.05 m/s impact is centered at the level of the 3-D IR-TRACC attachments to the anterior surface of the lower abdomen.

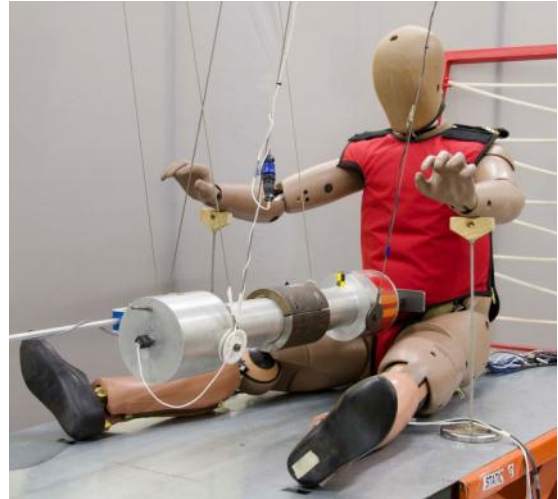

The X-axis abdomen deflections are calculated *in the local spine coordinate system* for both the left and right IR-TRACCs to examine the force-deflection response of the lower abdomen. The X-axis deflections of the left and right IR-TRACCs are assessed individually to ensure that both of the lower abdomen IR-TRACCs are functioning properly, while facilitating diagnosis should the force-deflection response not meet the qualification requirement.

9.2 Materials

- ☐ Fully assembled THOR-50M ATD
- ☐ Impactor 32.00 ± 0.02 kg (70.50 ± 0.05 lb) in mass, including rectangular impact face, instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables. The standard 152.4 ± 0.25 mm (6.0 ± 0.01 in) diameter rigid cylinder test probe can be used, with the 177.8×50.8 mm rectangular impact face attached (Figure 9-1). The rectangular impact surface attached to the test probe (DL472-3000) has a flat, right angle face with an edge radius of 6.0 ± 0.3 mm (0.24 ± 0.01 in).

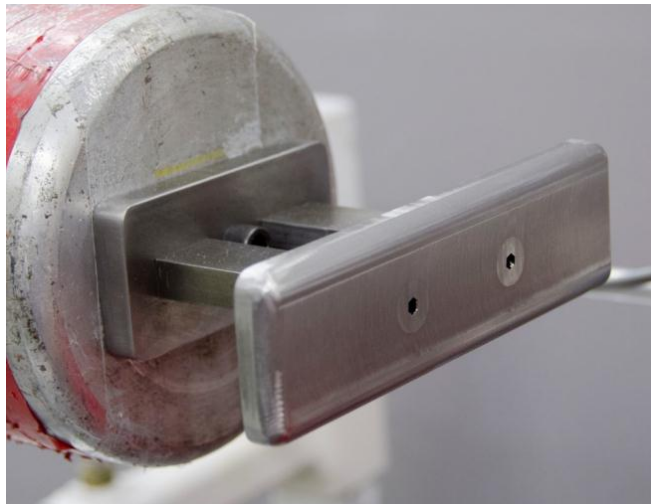


Figure 9-1. Rectangular impact face used in lower abdomen tests.

9.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity
- ☐ A dual-axis tilt sensor on the thoracic spine (T6; 472-3775-1 or 472-3775-2) to measure initial angles about “X” and “Y” axes
- ☐ A dual-axis tilt sensor attached to the pelvis (472-3777-1 or 472-3777-2) to measure initial angle about “X” and “Y” axes
- ☐ 3-D IR-TRACC assemblies in the lower left (472-4730-1) and lower right (472-4730-2) abdomen, installed as shown in 472-4700.

9.4 Pre-Test Procedures

- 9.4.1 If the jacket is installed, unzip the left and right shoulder and left and right torso zippers to expose the rib cage and abdomen inserts. Inspect the lower abdomen bag (472-4763) for wear, tears, or other damage. Unzip the lower abdomen bag and inspect the abdomen foam inserts (472-4764 and 472-4765) for damage. Prior to assembly, the abdomen should also be inspected for any permanent set and if necessary take appropriate action to replace or refurbish the part²⁶.
- 9.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 9.4.3 Set the lower thoracic spine (LTS) pitch change joint to the **slouched** position (see Section 3.1).
- 9.4.4 Set the neck pitch change joint to the **neutral** position (see Section 3.2).

9.5 Test Procedure

- 9.5.1 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support, with all limbs extended horizontally and forward parallel to the midsagittal plane. The midsagittal plane shall be vertical within ± 1 degree (Figure 9-2).

²⁶ See *Procedures for, Assembly, Disassembly, and Inspection for the THOR-50M ATD (PADI)*

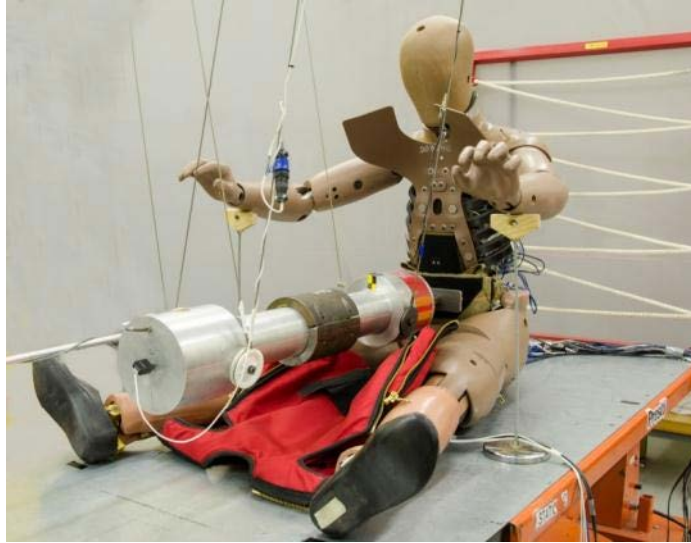


Figure 9-2. Initial setup for lower abdomen impact test

- 9.5.2 Place the crotch strap portion of the jacket under the pelvis so that later jacket installation does not affect positioning
- 9.5.3 Support the forearms in a fully-extended orientation (Figure 9-2). If this cannot be achieved, or the torso cannot be stabilized in the following two steps, repeat the Arm and Shoulder Joint Torque Settings procedure in Section 3.3 before proceeding.
- 9.5.4 Position the pelvis so that the pelvis tilt sensor (472-3777-1 or 472-3777-2) reads $10 \pm 1^\circ$ (rearward tilt about the Y-axis) and $0 \pm 0.5^\circ$ laterally (about the X-axis).
- 9.5.5 Position the thorax so that the T6 tilt sensor (472-3775-1 or 472-3775-2) reads $-4 \pm 1^\circ$ (forward tilt about the Y-axis) and $0 \pm 0.5^\circ$ laterally (about the X-axis).
- 9.5.6 Align the vertical centerline of the probe with the midsagittal plane of the ATD (Figure 9-3). The midsagittal plane can be visualized using the Nasion detent on the head skin, the front neck cable, the midpoint between the sternum-to-bib attachment bolts, and the pelvis flesh at the pubic symphysis.



Figure 9-3. Lateral alignment of impact location

- 9.5.7 Using a straight edge with an inclinometer or using a laser level, ensure that the centers of the anterior attachment nuts of the abdomen IR-TRACC measurement assemblies are in the horizontal ($\pm 1^\circ$) plane (Figure 9-4). If not, gently manipulate abdomen bag and re-measure until a horizontal ($\pm 1^\circ$) measurement is achieved. Confirm that the tilt sensor measurements from step 9.5.4 and 9.5.5 are retained.



Figure 9-4. Horizontal alignment of IR-TRACC attachment nuts



Figure 9-5. Vertical alignment of impact location

- 9.5.8 Adjust the table height or impactor height so that the vertical center of the impact face is aligned with the anterior attachment nuts of the abdomen IR-TRACC measurement assemblies (Figure 9-5).

- 9.5.9 Position the impact face adjacent to the abdomen. Measure the distance from the center of the anterior attachment nut of the left abdomen IR-TRACC measurement assembly to the nearest point on the impactor face (Figure 9-6). Repeat this measurement on the right side. The difference between these two distances must be less than 5 mm. If the difference is greater than 5 mm, ensure that the midsagittal plane of the dummy is aligned with the pendulum, and if necessary gently manipulate the abdomen bag and re-measure until the measurement difference is less than 5 mm.



Figure 9-6. Measurement of distance from IR-TRACC attachment nuts to impactor

- 9.5.10 Manipulate the upper arm in the anterior-posterior orientation until the interface between the rear ROM buffer (472-3816) and shoulder support (472-3814) is aligned with the scribe mark on the spring housing cover (Figure 9-7). If this cannot be achieved, repeat the procedures in Section 3.3 before proceeding.

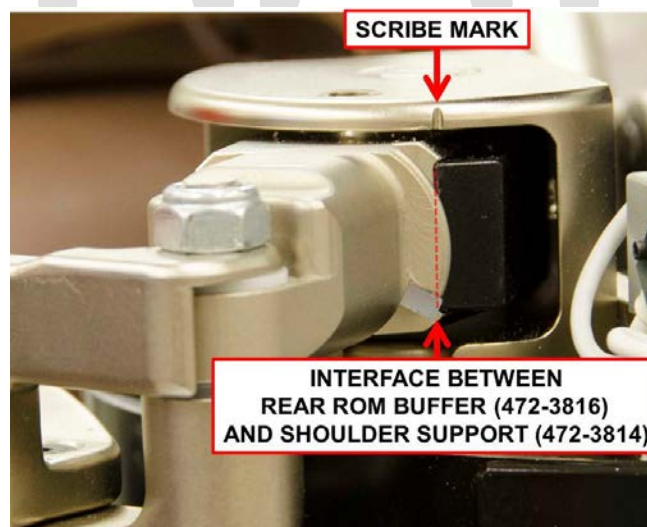


Figure 9-7. Align scribe mark to interface between rear ROM buffer and shoulder support.

- 9.5.11 Replace the Upper And Lower Abdomen Velcro Cover (472-4763-8) on the front of the abdomen and carefully reinstall the dummy's jacket by zipping the sides and shoulders of the jacket.
- 9.5.12 The motion of the impactor should be constrained so that there is no significant lateral, vertical, or rotational movement.
- 9.5.13 Record the "as measured (AM)" channels listed in **Table 9-2** in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 9.5.14 Confirm the test setup parameters illustrated in **Table 9-1**.

Table 9-1. Lower Abdomen Impact Test Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Slouched
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading: T6	$X = 0 \pm 0.5^\circ$; $Y = -4 \pm 1^\circ$
Tilt Sensor Reading: Pelvis	$X = 0 \pm 0.5^\circ$; $Y = 10 \pm 1^\circ$
Wait Time Between Tests	At Least 30 Minutes

- 9.5.15 Ensure that at least 30 minutes have passed since the last lower thorax or abdomen test on this ATD.
- 9.5.16 Conduct the test at an impact velocity of 3.30 ± 0.05 m/s.

9.6 Data Processing

- 9.6.1 Remove data channel offset, but do not *zero* the IR-TRACC and potentiometer channels; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.
- 9.6.2 Filter channels based on the CFC filter classes listed in Table 9-2. Do not filter the raw IR-TRACC voltage, as this will be filtered after it is linearized and scaled during Step 9.6.4.
- 9.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 9.6.4 Calculate the lower left and lower right X-axis abdomen deflections in the *local spine coordinate system* (lumbar spine (LS)) (see *THOR User's Manual*).
- 9.6.5 Calculate the absolute value of the difference between the peak left and right X-axis deflections in the *local coordinate system* (LS).

Table 9-2. Required Measurement Channels for the Abdomen Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Lower left abdomen IR-TRACC tube	N/A	D0ABDOLE00THVO0C	NA	AM	ABDL	DS	VOL
Lower left abdomen Y-axis rotational potentiometer	180	D0ABDOLE00THANYC	YL	AM	ABDL	AD	DEG
Lower left abdomen Z-axis rotational potentiometer	180	D0ABDOLE00THANZC	ZL	AM	ABDL	AD	DEG
Lower right abdomen IR-TRACC tube	N/A	D0ABDORI00THVO0C	NA	AM	ABDR	DS	VOL
Lower right abdomen Y-axis rotational potentiometer	180	D0ABDORI00THANYC	YL	AM	ABDR	AD	DEG
Lower right abdomen Z-axis rotational potentiometer	180	D0ABDORI00THANZC	ZL	AM	ABDR	AD	DEG
Pendulum Accelerometer	180	T0SENSMI0000ACXC	XG	AM	PEND	AC	G ' S
Pendulum Force	N/A	T0SENSMI0000FOX C	XG	CM	PEND	PP	NWT
Lower left abdomen X-axis deflection WRT LS	N/A	D0ABDOLE00THDSXC	XL	CM	ABDL	PP	MM
Lower right abdomen X-axis deflection WRT LS	N/A	D0ABDORI00THDSXC	XL	CM	ABDR	PP	MM

9.7 Performance Specifications

Table 9-3. Abdomen Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	3.25	3.35
Peak Force	N	2746	3078
Lower left abdomen X-axis deflection at time of Peak Force	mm	-92.9	-70.1
Lower right abdomen X-axis deflection at time of Peak Force			
Difference Between Peak Left & Right X-axis Deflections	mm	–	< 12.00

10 UPPER LEG QUALIFICATION

10.1 Description

This test examines the response of the femur to axial impacts at the knee using a 5.00 ± 0.02 kg impactor with a 76.2 ± 0.2 mm diameter rigid disk impact surface at 2.6 ± 0.05 m/s.



10.2 Materials

- ☐ Fully-assembled THOR-50M ATD
- ☐ Impactor 5.00 ± 0.02 kg (11.00 ± 0.05 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables, as defined in Part 572²⁷. The test probe is a 76.2 ± 0.2 mm (3.00 ± 0.01 in) diameter rigid cylinder. The impacting surface has a flat, right angle face with an edge radius of 0.5 ± 0.2 mm (0.02 ± 0.01 in).

10.3 Instrumentation

- ☐ Instrumentation to measure impact force (accelerometer on impactor or load cell / accelerometer combination if using a linear impactor)
- ☐ Instrumentation to measure the impact velocity

10.4 Pre-Test Procedures

- 10.4.1 Inspect the knee skin, knee insert and femur compression element²⁸ for wear, tears, or other damage. Prior to assembly, the femur compression element should also be inspected for any significant permanent set. A small radial bulge is usual after the femur compression element has been in service for some time; if necessary take appropriate action to refurbish the part²⁹.
- 10.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.

²⁷ Code of Federal Regulations, Anthropomorphic Test Devices, Title 49, §572.36(b)

²⁸ Part no. 472-5206

²⁹ See *Parts, Assembly, Disassembly for the THOR-50M ATD* (PADI)

- 10.4.3 Set the lower thoracic spine (LTS) pitch change joint to the **slouched** position (see Section 3.1).
- 10.4.4 Set the neck pitch change joint to the **neutral** position (see Section 3.2).
- 10.4.5 Position the lower leg as shown in Figure 10-1. Adjust the torque of the modified M10 shoulder bolt (472-5302) at the knee joint such that the lower leg remains in this position under its own mass but falls once any additional mass or force is added.



Figure 10-1. Knee orientation for setting joint torque to 1G

10.5 Test Procedure

- 10.5.1 Seat the dummy on a horizontal surface ($\pm 0.5^\circ$) with no back support (Figure 10-2), with femurs extended horizontally and forward parallel to the midsagittal plane and lower legs extended vertically and downward parallel to the vertical plane (Figure 10-3). The midsagittal plane shall be vertical within ± 1 degree.



Figure 10-2. Seat setup for upper leg qualification test



Figure 10-3. Initial setup for the upper leg qualification test

- 10.5.2 Position the arms along the side of the body (Figure 10-3).
- 10.5.3 Unzip the thigh flesh (472-5503-1 or 472-5503-2).
- 10.5.4 With the lower legs positioned over the front edge of the seating surface, measure the angle of the line between the center of the knee joint and the centerline of the femur shaft, which is visible through the gap between the thigh and pelvis flesh (Figure 10-4 and Figure 10-5), using a straight edge with an inclinometer or using a laser level. Place support shims under the thigh in order to level the centerline of the femur shaft in the horizontal plane ($\pm 0.5^\circ$).

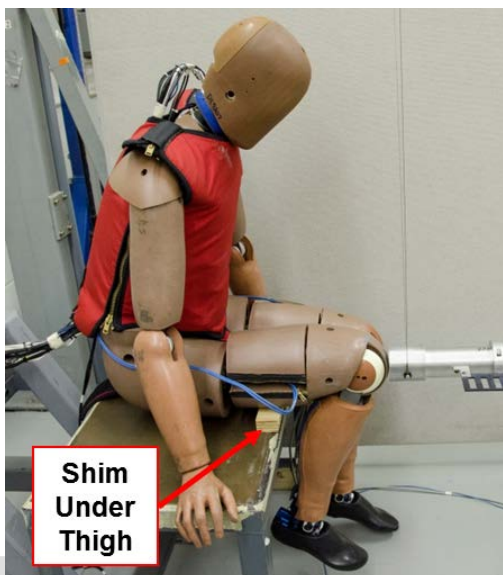


Figure 10-4. Location of shim used to level upper leg in horizontal plane

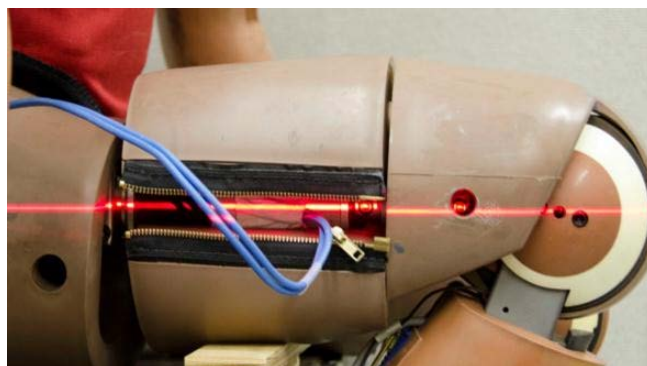


Figure 10-5. Horizontal alignment of knee and femur bone using laser level

- 10.5.5 Position the tibia at an angle of $20 \pm 1^\circ$ (in flexion, such that the ankle is behind the knee), as measured at the anterior aspect of the knee clevis (472-7200; Figure 10-6). The distance between the posterior surface of the tibia and the leading edge of the test seat shall be no less than 25 mm.

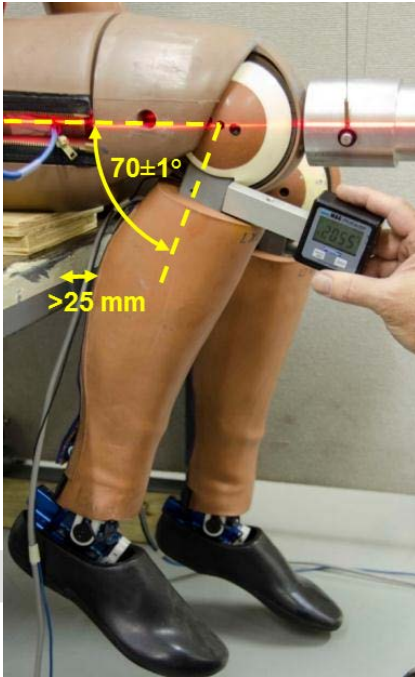


Figure 10-6. Lower leg angle measurement



Figure 10-7. Lateral alignment of impact location

- 10.5.6 Align the impact probe so that at the point of contact, the center of the probe face is centered on the surface of the knee and the longitudinal centerline of the probe is collinear within 0.5° of the longitudinal centerline of the femur load cell (Figure 10-7).
- 10.5.7 Taking care not to change the position of the leg, carefully re-zip the thigh flesh (472-5503-1 or 472-5503-2).
- 10.5.8 Position the foot and lower leg such that the center the ankle X-axis potentiometer is in the same vertical plane as the femur centerline (Figure 10-8).



Figure 10-8. Orientation of lower leg

- 10.5.9 At the point of contact, the longitudinal centerline of the impact probe must be within 0.5° of horizontal.
- 10.5.10 Constrain the motion of the impactor so that there is no significant lateral, vertical, or rotational movement.
- 10.5.11 Record the “as measured (AM)” channels listed in **Table 10-2** (for left impacts) and **Table 10-3** (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 10.5.12 Confirm the test setup parameters illustrated in **Table 10-1**.

Table 10-1. Seated Knee Impact Test Setup Parameters

Parameter	Setting
Lower Thoracic Spine (LTS) Pitch Change Setting	Slouched
Neck Pitch Change Setting	Neutral
Tilt Sensor Reading	N/A
Wait Time Between Tests	At Least 30 Minutes

- 10.5.13 Ensure that at least 30 minutes have passed since the last upper leg qualification test.
- 10.5.14 Conduct the test at a velocity of 2.60 ± 0.05 m/s.
- 10.5.15 Repeat Section 10.5 for the opposite upper leg.

10.6 Data Processing

- 10.6.1 Remove data channel offset per SAE J211 Section 8.4.3.

- 10.6.2 Filter channels based on the CFC filter classes listed in Table 10-2 (for left impacts) and Table 10-3 (for right impacts).
- 10.6.3 Calculate time-history of impact force at the contact interface (see Section 2.4).
- 10.6.4 Calculate resultant acetabulum force:

$$PVA[LR]_{FR} = \sqrt{PVA[LR]_{FX}^2 + PVA[LR]_{FY}^2 + PVA[LR]_{FZ}^2}$$

Table 10-2. Required Measurement Channels for the Left Upper Leg Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer	600	T0SENSMI0000ACXB	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOX B	XG	CM	PEND	PP	NWT
Left Femur Force, Z-axis	600	DOFEMRLE00THFOZB	ZL	AM	FMRL	LC	NWT
Left Acetabulum Force, X-axis	600	D0ACTBLE00THFOX B	XL	AM	PVAL	LC	NWT
Left Acetabulum Force, Y-axis	600	D0ACTBLE00THFOYB	YL	AM	PVAL	LC	NWT
Left Acetabulum Force, Z-axis	600	D0ACTBLE00THFOZB	ZL	AM	PVAL	LC	NWT
Left Acetabulum Force, Resultant	N/A	D0ACTBLE00THFORB	RS	CM	PVAL	PP	NWT

Table 10-3. Required Measurement Channels for the Right Upper Leg Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Pendulum Accelerometer	600	T0SENSMI0000ACXB	XG	AM	PEND	AC	G'S
Pendulum Force	N/A	T0SENSMI0000FOX B	XG	CM	PEND	PP	NWT
Right Femur Force, Z-axis	600	DOFEMRRI00THFOZB	ZL	AM	FMRR	LC	NWT
Right Acetabulum Force, X-axis	600	D0ACTBRI00THFOX B	XL	AM	PVAR	LC	NWT
Right Acetabulum Force, Y-axis	600	D0ACTBRI00THFOYB	YL	AM	PVAR	LC	NWT
Right Acetabulum Force, Z-axis	600	D0ACTBRI00THFOZB	ZL	AM	PVAR	LC	NWT
Right Acetabulum Force, Resultant	N/A	D0ACTBRI00THFORB	RS	CM	PVAR	PP	NWT

10.7 Performance Specifications


Table 10-4. Upper Leg Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	2.55	2.65
Peak Probe Force	N	4278	5093
Peak Femur Force, F_z	N	-3314	-2712
Peak Resultant Acetabulum Force	N	1478	1806

11 KNEE QUALIFICATION

11.1 Description

This test examines the response of the anterior-posterior translation of the tibia with respect to the femur at the knee joint. A 12.00 ± 0.02 kg impactor with a 76.2 ± 0.2 mm diameter rigid disk impact surface impacts a load distribution bracket attached at the knee joint at 2.20 ± 0.05 m/s; Femur force, knee deflection and impact velocity are recorded.

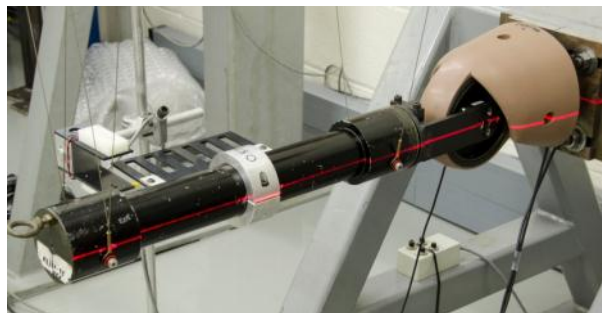

11.2 Materials

- ☐ THOR ATD knee assembly (472-5100-1 or 472-5100-2)
- ☐ Impactor 12.00 ± 0.02 kg (26.46 ± 0.04 lb) in mass, including instrumentation, rigid attachments and the mass of the lower 1/3 of the suspension cables. The test probe is a 76.2 ± 0.2 mm (3.00 ± 0.01 in) diameter rigid cylinder. The impacting surface has a flat, right angle face with an edge radius of 0.5 ± 0.2 mm (0.02 ± 0.01 in).
- ☐ Knee impact test fixture (Figure A - 3)
- ☐ Load distribution bracket (DL472-5000); Note that unlike the Hybrid III 50th knee slider test, *no foam pad* is used on the impact surface for this test

11.3 Instrumentation

- ☐ THOR femur load cell (SA572-S120)
- ☐ Instrumentation to measure the impact velocity
- ☐ THOR knee slider string potentiometer (SA572-S90)

11.4 Pre-Test Procedures

- 11.4.1 Inspect the knee assembly for damage. Pay particular attention to the left and right side slider assemblies to ensure the tracks are clean and free from damage, and if necessary take appropriate action to refurbish the part³⁰. Ensure that the potentiometer is installed correctly by manipulating the knee joint and verifying that the potentiometer string is free from obstruction.

³⁰ See *Parts, Assembly, Disassembly for the THOR-50M ATD* (PADI)

- 11.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.

11.5 Test Procedure

- 11.5.1 Mount the THOR femur load cell (Figure 11-1) to the knee impact test fixture using four modified M6 BHSS and torque to 20.3 N-m (15.0 ft-lbf).
- 11.5.2 Orient the inboard/outboard knee slider assembly (472-5310) such that motion along the knee slider track is horizontal, parallel to the long axis of the femur load cell. Install the load distribution bracket to the inboard and outboard slider assemblies in the orientation shown in Figure 11-1 using two M6x1 FHCS on each side and torque to 20.3 N-m (15.0 ft-lbf). Note that the load distribution bracket is installed perpendicular to the orientation of the knee clevis in the fully-assembled, seated dummy.

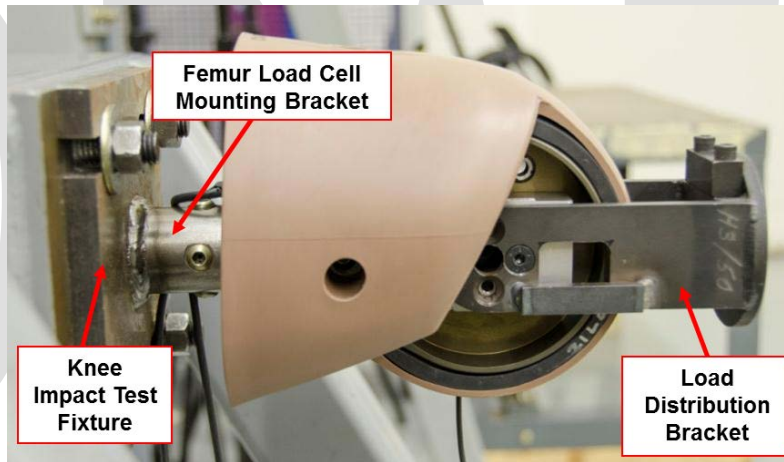


Figure 11-1. Knee slider impact test fixture

- 11.5.3 Once the load distribution bracket is installed, set the torque on the modified M10 shoulder bolt (472-5302) to 5 N-m (Figure 11-2).

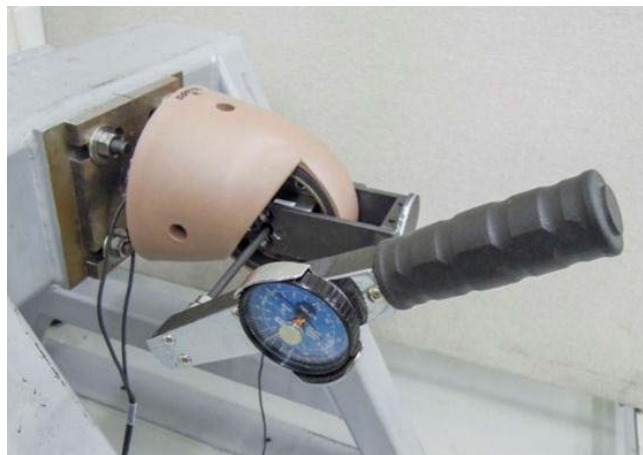


Figure 11-2. Knee joint bolt torque setting

- 11.5.4 Adjust the position of the impact probe such that its longitudinal centerline is collinear within 2 degrees with the centerline of the femur load cell. A laser level positioned between the centerline of the knee and the centerline of the probe both laterally (Figure 11-3) and on the top surface of the probe/knee (Figure 11-4) will aid in this process.

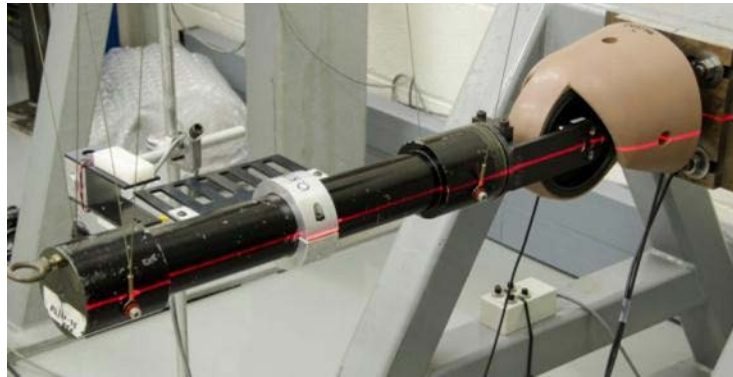


Figure 11-3. Vertical alignment of impact location



Figure 11-4. Lateral alignment of impact location

- 11.5.5 After alignment, confirm that the impact surfaces of the probe and the load distribution are approximately flush (**Figure 11-5**).

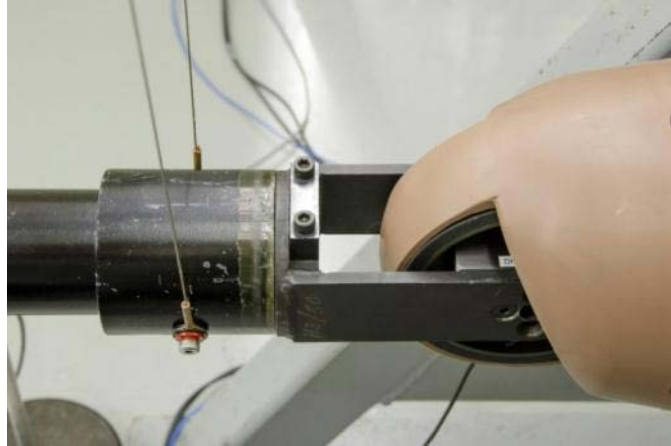


Figure 11-5. Alignment probe and distribution bracket impact surfaces

- 11.5.6 The motion of the impactor should be constrained so that there is no significant lateral, vertical, or rotational movement at the time of contact between the test probe face and the load distribution bracket.
- 11.5.7 Record the “as measured (AM)” channels listed in Table 11-1 (for left impacts) or Table 11-2 (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the load distribution bracket using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 11.5.8 Ensure that at least 30 minutes have passed since the last test on the upper leg or knee.
- 11.5.9 Conduct the test at a velocity of 2.20 ± 0.05 m/s.
- 11.5.10 Repeat Section 11.5 for the opposite knee.

11.6 Data Processing

- 11.6.1 Remove data channel offset per SAE J211 Section 8.4.3.
- 11.6.2 Filter channels based on the CFC filter classes listed in **Table 11-1** (for left impacts) or **Table 11-2** (for right impacts).

Table 11-1. Required Measurement Channels for the Left Knee Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Left Femur Force, Z-axis	180	D0FEMRLE00THFOZC	ZL	AM	FMRL	LC	NWT
Left Knee Slider Deflection	180	D0KNSLLE00THDSXC	XL	AM	KNEL	DS	MM

Table 11-2. Required Measurement Channels for the Right Knee Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Right Femur Force, Z-axis	180	D0FEMRRI00THFOZC	ZL	AM	FMRR	LC	NWT
Right Knee Slider Deflection	180	D0KNSLRI00THDSXC	XL	AM	KNER	DS	MM

11.7 Performance Specifications

Table 11-3. Knee Qualification Response Requirements


Parameter	Units	Specification	
		Min.	Max.
Impact Velocity	m/s	2.15	2.25
Peak Femur Z-axis Force	N	-7170	-5866
Knee Deflection at Peak Femur Force	mm	-20.9	-19.5

DRAFT

12 ANKLE INVERSION AND EVERSION QUALIFICATION

12.1 Description

The ankle qualification consists of two impacts (one each for inversion and eversion) to a padded bracket which is temporarily attached to the sole plate of the foot. The bracket is attached such that the line of impact is offset from the longitudinal axis of the tibia, and the resulting motion of the foot exercises the inversion and eversion properties of the ankle assembly. The leg is held rigidly such that the X-Z plane of the foot and lower leg are horizontal. The impact surface of the bracket is covered with Ensolite® padding to reduce noise transmission through the bracket into the ankle and load cell.

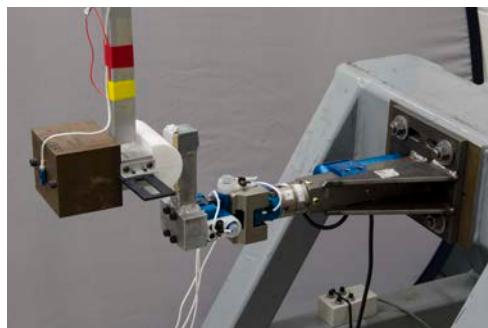

12.2 Materials

- ☐ THOR ATD lower leg (472-7000-1 or 472-7000-2)
- ☐ NHTSA Dynamic Impactor (TLX-9000-013) 5.00 ± 0.02 kg (11.02 ± 0.04 lb) in *effective* mass, which includes the mass of instrumentation, ballast (TLX-9000-001), impactor face (TLX-9000-006), and a portion of the mass of the pendulum arm (TLX-9000-007) including the distal mass welded to the tube and 1/3 of the mass of the tube itself. The pendulum arm is mounted to a rigid shaft which is pivoted on low friction ball bearings. The impact surface is a rigid semi-cylinder 63.5 ± 2.5 mm in diameter and 88.9 ± 3.5 mm in length, oriented in a horizontal plane perpendicular to the direction of impact.
- ☐ Ankle external positioning bracket (TLX-9000-016M)
- ☐ Dynamic inversion/eversion bracket (TLX-9000-015)
- ☐ Lower leg mounting bracket assembly (DL472-4100) attached to a rigid surface

12.3 Instrumentation

- ☐ THOR lower tibia load cell (SA572-S33)
- ☐ THOR X-axis ankle potentiometer (SA572-114)
- ☐ Instrumentation to measure the impact velocity

12.4 Pre-Test Procedures

- 12.4.1 Inspect the lower leg assembly for damage. Inspect the ankle soft stops (472-7532, 472-7536, 472-7537 x 2) for tears, permanent deformations, or separation from the soft stop brackets. If necessary, take appropriate action to refurbish the part³¹.
- 12.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 12.4.3 If not yet carried out on the lower leg being used for this test, conduct the Ankle Rotary Potentiometer Zeroing Procedure described in Section 3.4.
- 12.4.4 If not yet carried out on the lower leg being used for this test, conduct the Achilles Cable Adjustment Procedure described in Section 3.5.

12.5 Test Procedure

- 12.5.1 Remove the tibia skin (472-7370) and the two M6 x 1 x 16 BHCS which attach the tibia guard (472-5420) to the lower leg assembly (Figure 12-1).



Figure 12-1. Remove tibia guard

³¹ See *Parts, Assembly, Disassembly for the THOR-50M ATD (PADI)*

- 12.5.2 Remove the four M6 x 1 x 12 FHCS (two per side) which attach the Achilles spring tube assembly to the rear of the lower tibia tube (Figure 12-2).



Figure 12-2. Remove Achilles spring tube assembly

- 12.5.3 Separate the ankle assembly from the leg by removing the four modified M6 BHSS (W50-61042) attaching the lower tibia tube assembly (472-7310) to the lower tibia load cell (Figure 12-3). Set the rest of the lower leg mechanical assembly (472-7300) aside.



Figure 12-3. Separate the ankle assembly from the lower tibia load cell

- 12.5.4 Mount the Lower Leg Mounting Bracket Assembly (472-4100) to a rigid surface (Figure 12-4, Figure 12-5, APPENDIX A). The remainder of the procedural instructions in this Section are written for the left leg inversion test. The setup for eversion tests follows the same procedures as inversion, except that the orientation is rotated 180° about its longitudinal axis (Figure 12-5).

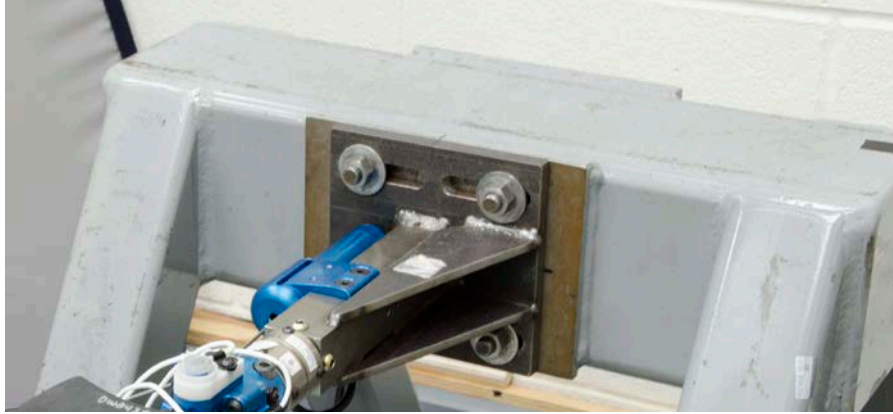


Figure 12-4. Orientation of lower leg mounting bracket for inversion tests



Figure 12-5. Orientation of lower leg mounting bracket for eversion tests

- 12.5.5 Mount the ankle assembly to the leg mounting bracket using four modified M6 BHSS (W50-61042) with torque set to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf) such that the X-Z plane of the foot and lower leg are horizontal (Figure 12-6).

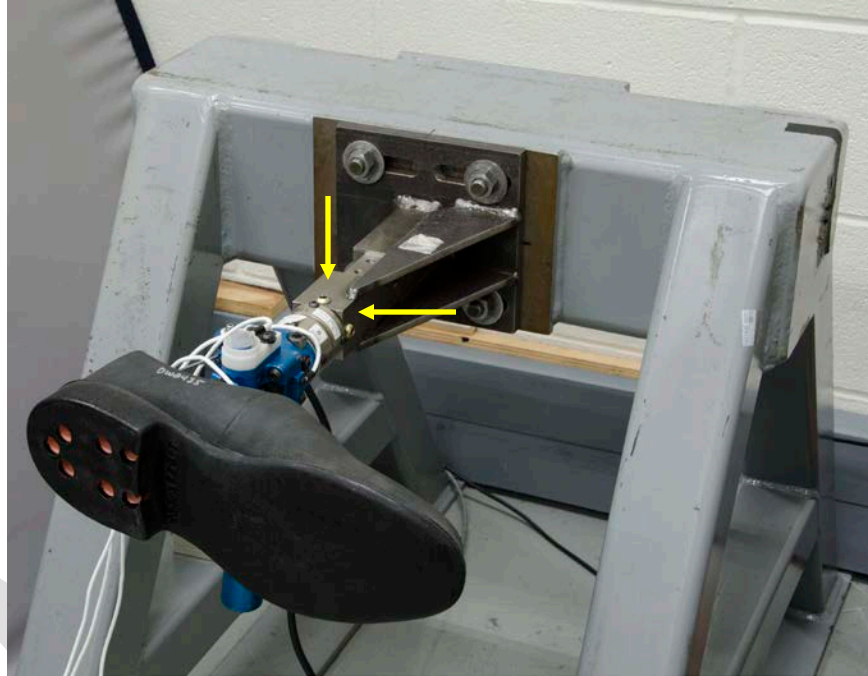


Figure 12-6. Lower (left) leg mounted to bracket for inversion test

- 12.5.6 Secure the Achilles spring tube assembly to the leg mounting bracket using four M6 x 12mm FHCS (Figure 12-7).



Figure 12-7. Install Achilles tube assembly to mounting bracket

- 12.5.7 Remove the four FHCS from the bottom of the heel of the molded shoe.

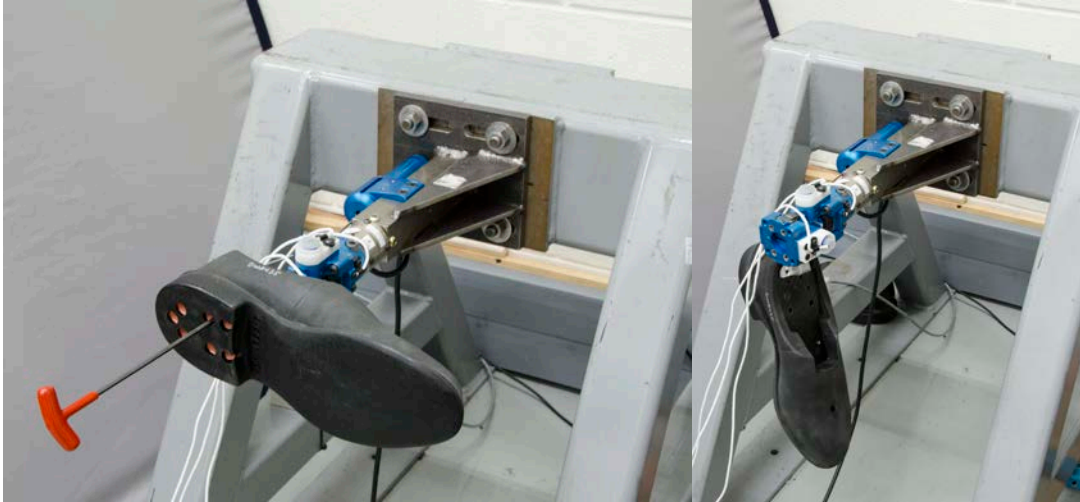


Figure 12-8. Remove molded shoe from ankle

- 12.5.8 Orient the foot at $0^\circ \pm 0.5^\circ$ dorsiflexion/plantarflexion and inversion/eversion. Use the external positioning bracket (TLX-9000-016M; Figure 12-9) to hold the ankle in the proper orientation (Figure 12-10).

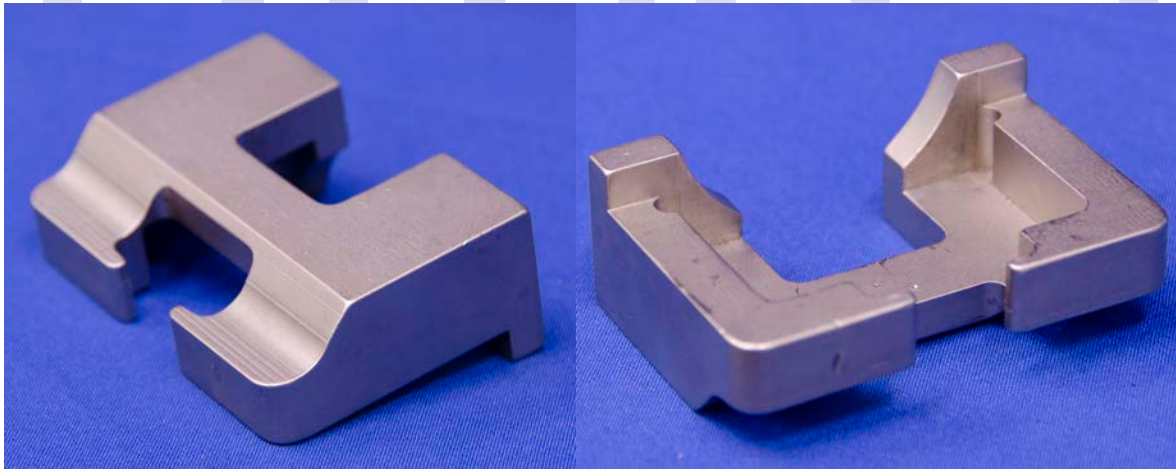


Figure 12-9. External positioning bracket for holding ankle orientation

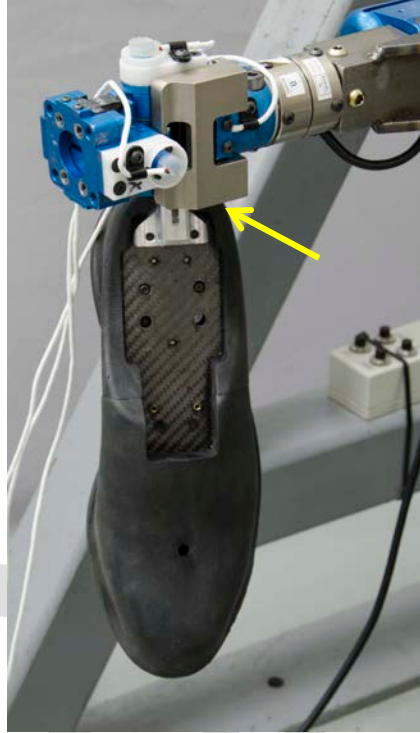


Figure 12-10. External positioning bracket installed on ankle

- 12.5.9 Attach the dynamic inversion/eversion bracket (TLX-9000-015; Figure 12-11) in place of the molded shoe to the bottom (inferior) side of the ankle using four M6 x 1 x 35 mm SHCS torqued to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf) (Figure 12-12). *Note: Do not use bolts longer than 47.6 mm, as these may damage the inversion/eversion soft stop brackets.*

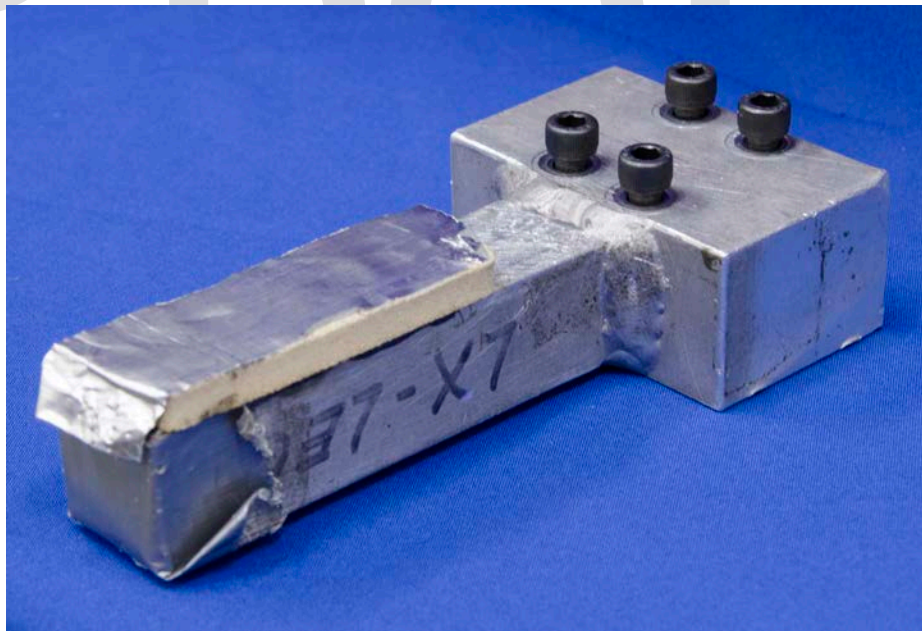


Figure 12-11. Dynamic inversion/eversion bracket



Figure 12-12. Install dynamic inversion/eversion bracket

- 12.5.10 In order to aid in setup, remove the foot from the Achilles cable so that the weight of the foot does not interfere with ankle positioning (Figure 12-13). Using the zero offset values collected in Section 3.4, position the ankle Y axis and Z axis rotations to $0^\circ \pm 0.5^\circ$.

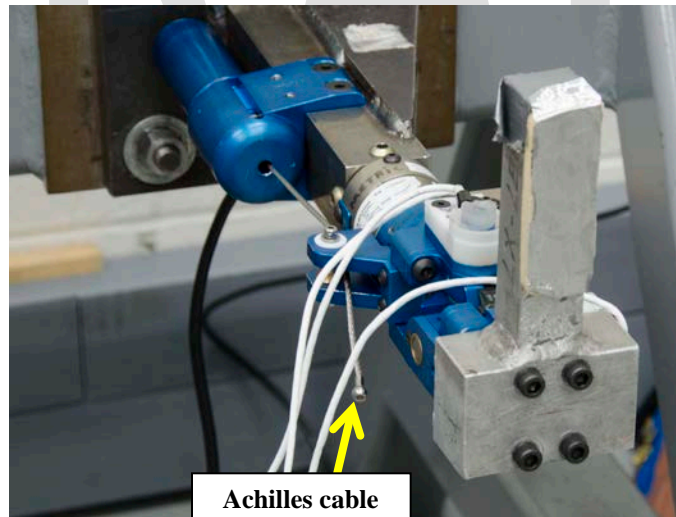


Figure 12-13. Remove foot from Achilles cable

- 12.5.11 Assure that the impactor arm is vertical.
- 12.5.12 Adjust the position of the impactor such that the longitudinal centerline of the pendulum arm and the struck surface of the inversion/eversion bracket are vertical at impact, within $\pm 0.5^\circ$ and the point of impact is 102.6 ± 2.5 mm (4.04 ± 0.1 in) above the ankle X-axis pivot point (Figure 12-14).

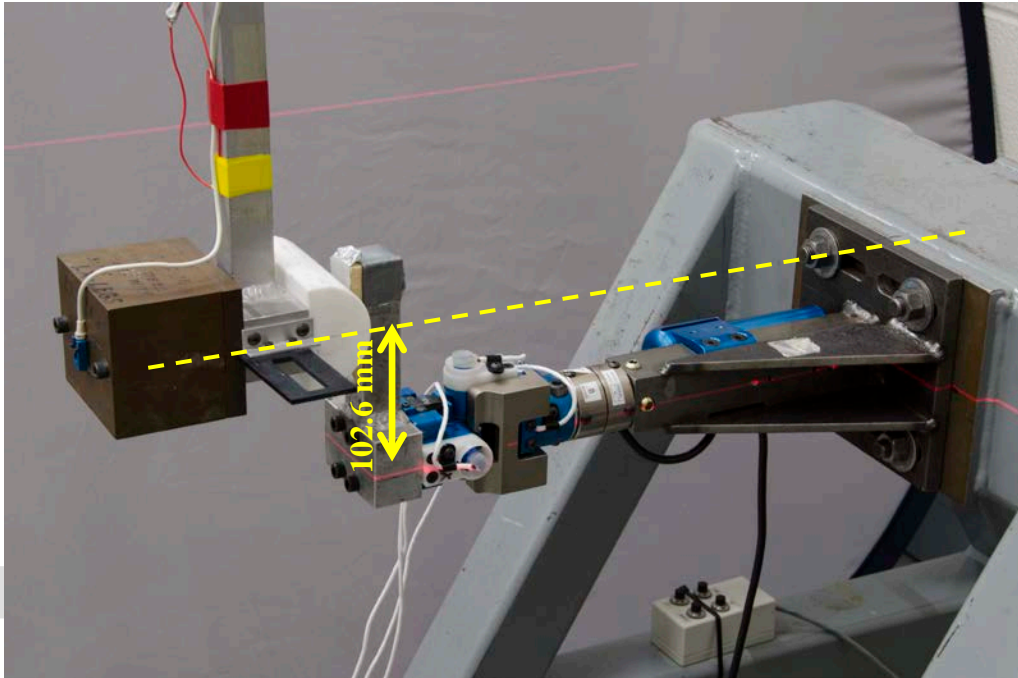


Figure 12-14. Set impact location for inversion (or eversion) test

- 12.5.13 Record the “as measured (AM)” channels listed in **Table 12-1** (for left impacts) or **Table 12-2** (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the dynamic inversion/eversion bracket using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 12.5.14 Ensure that at least 30 minutes have passed since the last test on the lower leg.
- 12.5.15 Release the pendulum and allow it to fall freely from a height to achieve an impact velocity of 2.0 ± 0.1 m/s (6.6 ± 0.3 ft/s).
- 12.5.16 For eversion tests, rotate the mounting bracket 180° about its longitudinal axis as shown in Figure 12-5. Remove the dynamic inversion/eversion bracket from the ankle assembly by uninstalling the four M6 x 1 x 35 mm SHCS. Rotate the bracket 180 degrees about the longitudinal axis of the tibia and reinstall using four M6 x 1 x 35 mm SHCS torqued to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf) (Figure 12-15). Follow the same procedures as described in Section 12.5 for inversion.

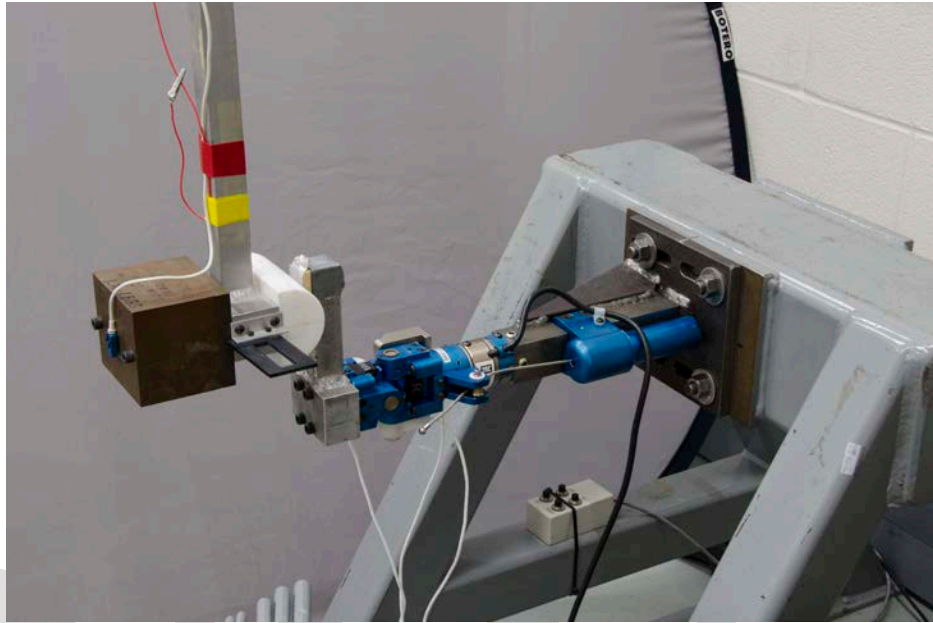


Figure 12-15. Eversion test setup

12.6 Data Processing

- 12.6.1 Remove data channel offset, but do not *zero* the ankle rotational potentiometer; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.
- 12.6.2 Filter channels based on the CFC filter classes listed in **Table 12-1** (for left impacts) or **Table 12-2** (for right impacts).

12.6.3 Calculate ankle resistive moment:

$$\text{Left: } M_{ANKL} = M_{x_{TBLL}} + [0.1054m \times F_{y_{TBLL}}]$$

$$\text{Right: } M_{ANKR} = M_{x_{TBLR}} + [0.1054m \times F_{y_{TBLR}}]$$

Table 12-1. Required Measurement Channels for the Left Ankle Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Left Lower Tibia Shear Force, Y-axis	600	D0TIBILELOTHFOYB	YL	AM	TBLL	LC	NWT
Left Lower Tibia Axial Force, Z-axis	600	D0TIBILELOTHFOZB	ZL	AM	TBLL	LC	NWT
Left Lower Tibia Moment, X-axis	600	D0TIBILELOTHMOXB	XL	AM	TBLL	LC	NWM
Left Ankle Rotation, X-axis	180	D0ANKLLE00THANXC	XL	AM	ANKL	AD	DEG
Left Ankle Resistive Moment	N/A	D0ANKLLE00THMOXB	XL	CM	ANKL	PP	NWM

Table 12-2. Required Measurement Channels for the Right Ankle Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Right Lower Tibia Shear Force, Y-axis	600	D0TIBIRILOTHFOYB	YL	AM	TBRL	LC	NWT
Right Lower Tibia Axial Force, Z-axis	600	D0TIBIRILOTHFOZB	ZL	AM	TBRL	LC	NWT
Right Lower Tibia Moment, X-axis	600	D0TIBIRILOTHMOXB	XL	AM	TBRL	LC	NWM
Right Ankle Rotation, X-axis	180	D0ANKLRI00THANXC	XL	AM	ANKR	AD	DEG
Right Ankle Resistive Moment	N/A	D0ANKLRI00THMOXB	XL	CM	ANKR	PP	NWM

12.7 Performance Specifications

Table 12-3. Ankle Inversion Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Peak Lower Tibia F_z	N	458	560
Peak Ankle Resistive Moment ³²	Nm	35.5	43.4
Peak Ankle X-axis Rotation ³²	deg	33.3	35.6

Table 12-4. Ankle Eversion Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Peak Lower Tibia F_z	N	515	629
Peak Ankle Resistive Moment ³³	Nm	38.8	47.3
Peak Ankle X-axis Rotation ^{32,33}	deg	27.5	31.5


³² Specifications are presented as absolute values to accommodate both inversion and eversion tests.

³³ Specifications are presented as absolute values to accommodate both inversion and eversion tests.

13 BALL OF FOOT QUALIFICATION

13.1 Description

This examines the dynamic impact response of the ball of the foot (BOF). The leg is held rigidly with the tibia horizontal, without the presence of the tibia compliant element.

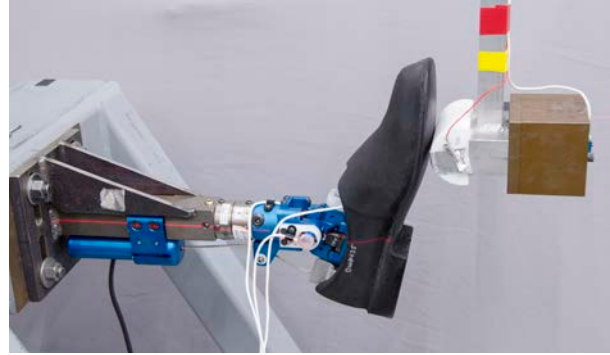

13.2 Materials

- ☐ THOR ATD lower leg (472-7000-1 or 472-7000-2)
- ☐ NHTSA Dynamic Impactor (TLX-9000-013) 5.00 ± 0.02 kg (11.02 ± 0.04 lb) in *effective* mass, which includes the mass of instrumentation, ballast (TLX-9000-001), impactor face (TLX-9000-006), and a portion of the mass of the pendulum arm (TLX-9000-007) including the distal mass welded to the tube and 1/3 of the mass of the tube itself. The pendulum arm is mounted to a rigid shaft which is pivoted on low friction ball bearings. The impact surface is a rigid semi-cylinder 63.5 ± 2.5 mm in diameter and 88.9 ± 3.5 mm in length, oriented in a horizontal plane perpendicular to the direction of impact.
- ☐ Lower leg mounting bracket assembly (DL472-4100) attached to a rigid surface

13.3 Instrumentation

- ☐ THOR lower tibia load cell (SA572-S33)
- ☐ THOR Y-axis ankle potentiometer (SA572-114)
- ☐ Instrumentation to measure the impact velocity

13.4 Pre-Test Procedures

- 13.4.1 Inspect the lower leg assembly for damage. Inspect the ankle soft stops (472-7532, 472-7536, 472-7537 x 2) for tears, permanent deformations, or separation from the soft stop brackets. Inspect the foot skin for wear and tears. If necessary, take appropriate action to refurbish the part³⁴.
- 13.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.
- 13.4.3 If not yet carried out on the lower leg being used for this test, conduct the Ankle Rotary Potentiometer Zeroing Procedure described in Section 3.4.
- 13.4.4 If not yet carried out on the lower leg being used for this test, conduct the Achilles Cable Adjustment Procedure described in Section 3.5.

13.5 Test Procedure

- 13.5.1 Follow the steps in Sections 3.4.1 through 3.4.6 to install the lower leg to the lower leg mounting bracket assembly (Figure 13-1).

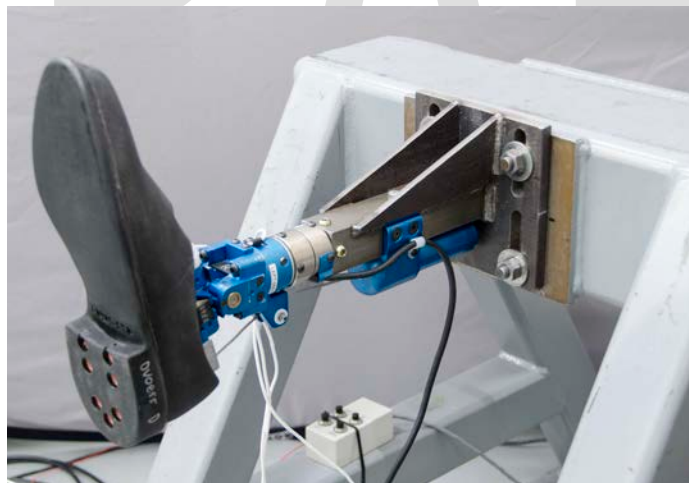


Figure 13-1. Install lower leg to mounting bracket assembly

- 13.5.2 Initialize the ankle Y axis potentiometer and apply any necessary corrections developed in Section 3.4, Ankle Rotary Potentiometer Zeroing Procedure.

³⁴ See *Parts, Assembly, Disassembly for the THOR-50M ATD (PADI)*

- 13.5.3 Allow the foot to rest in the neutral position (Figure 13-2). Verify using the Y-axis potentiometer reading that the foot is at $20 \pm 0.5^\circ$ plantarflexion (toe further away from tibia than heel). Be certain to apply any necessary corrections to the angle (Section 13.5.2). If foot does not achieve this position, rotate the foot over the range of motion in plantarflexion and dorsiflexion a few times. Confirm that the Y axis potentiometer reading is $20 \pm 0.5^\circ$ before proceeding. If necessary, a light piece of masking tape may be used between the toe and the fixture to hold the position.

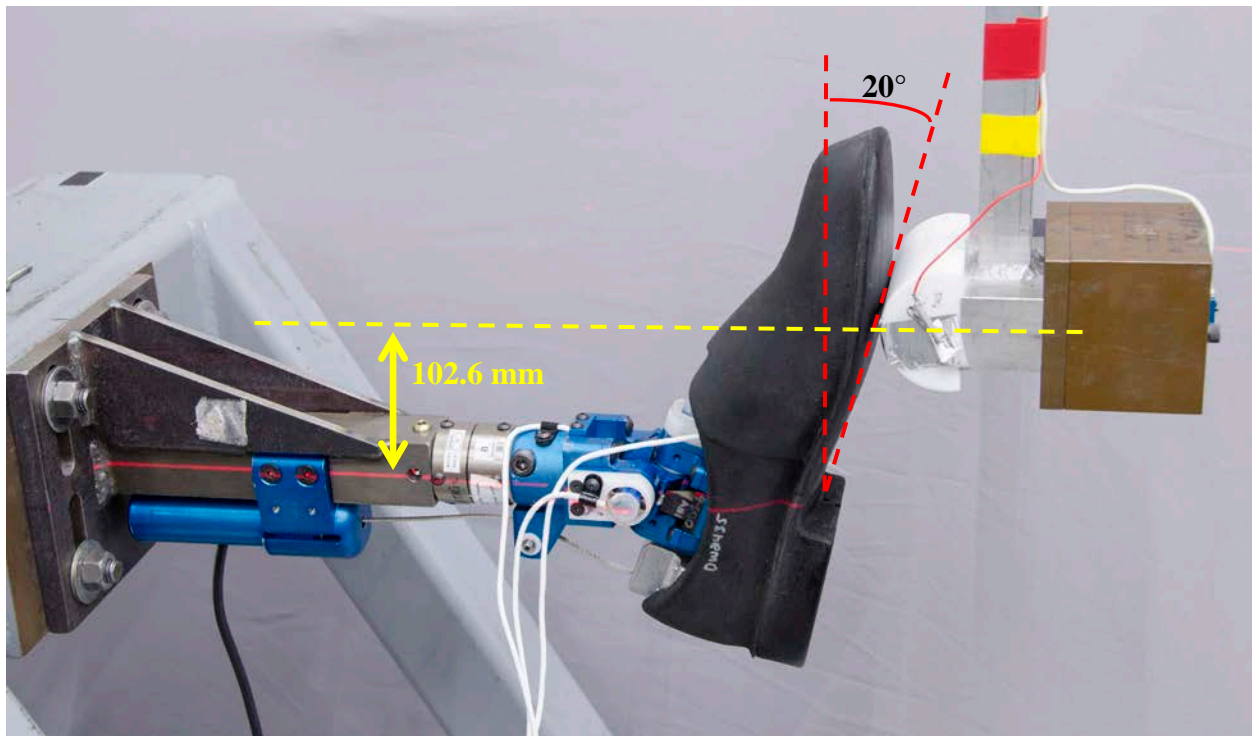


Figure 13-2. Ball of foot setup

- 13.5.4 Adjust the position of the impactor so that the longitudinal centerline of the pendulum arm is vertical at impact, within $\pm 0.5^\circ$, and the point of impact is 102.6 ± 2.5 mm (4.04 ± 0.1 in) above the ankle Y-axis pivot point (Figure 13-2).
- 13.5.5 Record the “as measured (AM)” channels listed in **Table 13-1** (for left impacts) or **Table 13-2** (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 13.5.6 Ensure that at least 30 minutes have passed since the last test on the lower leg.
- 13.5.7 Release the pendulum and allow it to fall freely from a height to achieve an impact velocity of 5.0 ± 0.1 m/s (16.4 ± 0.3 ft/s).

13.5.8 Repeat Section 13.5 for the opposite leg.

13.6 Data Processing

13.6.1 Remove data channel offset, but do not *zero* the ankle rotational potentiometer; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.

13.6.2 Filter channels based on the CFC filter classes listed in **Table 13-1** (for left impacts) or **Table 13-2** (for right impacts).

13.6.3 Calculate ankle resistive moment:

$$\text{Left: } M_{ANKL} = M_{y_{TBLL}} - [0.0907m \times F_{x_{TBLL}}]$$

$$\text{Right: } M_{ANKR} = M_{y_{TBLR}} - [0.0907m \times F_{x_{TBLR}}]$$

Table 13-1. Required Measurement Channels for the Left BOF Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Left Lower Tibia Shear Force, X-axis	600	D0TIBILELOTHFOXB	XL	AM	TBLL	LC	NWT
Left Lower Tibia Axial Force, Z-axis	600	D0TIBILELOTHFOZB	ZL	AM	TBLL	LC	NWT
Left Lower Tibia Moment, Y-axis	600	D0TIBILELOTHMOYB	YL	AM	TBLL	LC	NWM
Left Ankle Rotation, Y-axis	180	D0ANKLLE00THANYC	YL	AM	ANKL	AD	DEG
Left Ankle Resistive Moment	N/A	D0ANKLLE00THMOYB	YL	CM	ANKL	PP	NWM

Table 13-2. Required Measurement Channels for the Right BOF Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Right Lower Tibia Shear Force, X-axis	600	D0TIBIRILOTHFOXB	XL	AM	TBRL	LC	NWT
Right Lower Tibia Axial Force, Z-axis	600	D0TIBIRILOTHFOZB	ZL	AM	TBRL	LC	NWT
Right Lower Tibia Moment, Y-axis	600	D0TIBIRILOTHMOYB	YL	AM	TBRL	LC	NWM
Right Ankle Rotation, Y-axis	180	D0ANKLRI00THANYC	YL	AM	ANKR	AD	DEG
Right Ankle Resistive Moment	N/A	D0ANKLRI00THMOYB	YL	CM	ANKR	PP	NWM

13.7 Performance Specifications

Table 13-3. BOF Qualification Response Requirements

Parameter	Units	Specification	
		Min.	Max.
Peak Lower Tibia F_z	N	-3437	-2897
Peak Ankle Resistive Moment	Nm	50.2	61.3
Peak Ankle Y-axis Rotation	deg	32.5	35.1

14 HEEL QUALIFICATION

14.1 Description

This examines the dynamic impact response of the heel of the foot. The leg is held rigidly with the tibia horizontal.



14.2 Materials

- ☐ THOR ATD lower leg (472-7000-1 or 472-7000-2)
- ☐ NHTSA Dynamic Impactor (TLX-9000-013) 5.00 ± 0.02 kg (11.02 ± 0.04 lb) in *effective* mass, which includes the mass of instrumentation, ballast (TLX-9000-001), impactor face (TLX-9000-006), and a portion of the mass of the pendulum arm (TLX-9000-007) including the distal mass welded to the tube and 1/3 of the mass of the tube itself. The pendulum arm is mounted to a rigid shaft which is pivoted on low friction ball bearings. The impact surface is a rigid semi-cylinder 63.5 ± 2.5 mm in diameter and 88.9 ± 3.5 mm in length, oriented in a horizontal plane perpendicular to the direction of impact.
- ☐ Ankle external positioning bracket (TLX-9000-016M)

14.3 Instrumentation

- ☐ THOR lower tibia load cell (SA572-S33)
- ☐ THOR upper tibia load cell (SA572-S32)
- ☐ Instrumentation to measure the impact velocity

14.4 Pre-Test Procedures

- 14.4.1 Inspect the tibia compliant bushing assembly (472-7315) for fatigue and deformation. Check plunger retaining bolts (472-7335) for wear and proper torque of 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf). Inspect the molded shoe for wear and tear. Replace components that have experienced excessive wear³⁵.
- 14.4.2 Soak the ATD in a controlled environment with a temperature of 20.6 to 22.2 °C (69 to 72 °F) and a relative humidity from 10 to 70% for at least 4 hours prior to a test. The test environment should have the same temperature and humidity requirements as the soak environment.

³⁵ See *Parts, Assembly, Disassembly for the THOR-50M ATD* (PADI)

- 14.4.3 If not yet carried out on the lower leg being used for this test, conduct the Ankle Rotary Potentiometer Zeroing Procedure described in Section 3.4.
- 14.4.4 If not yet carried out on the lower leg being used for this test, conduct the Achilles Cable Adjustment Procedure described in Section 3.5.

14.5 Test Procedure

- 14.5.1 Remove the tibia skin (472-7370) and the two M6 x 1 x 16 BHCS which attach the tibia guard (472-5420) to the lower leg assembly (Figure 14-1).

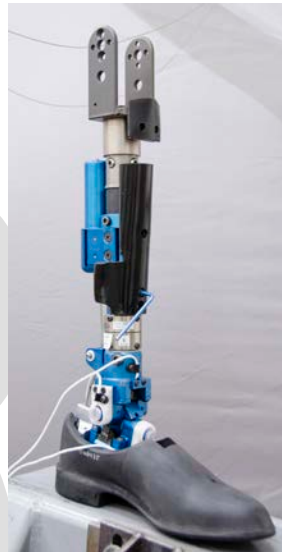


Figure 14-1. Remove tibia guard

- 14.5.2 Remove the four M6 x 1 x 12 FHCS (two per side) which attach the Achilles spring tube assembly to the rear of the lower tibia tube (Figure 14-2).



Figure 14-2. Remove Achilles spring tube assembly

- 14.5.3 Remove the four M6 x 1.0 x 16 mm SHCS which attach the knee clevis to the upper tibia load cell (SA572-S32) (Figure 14-3).

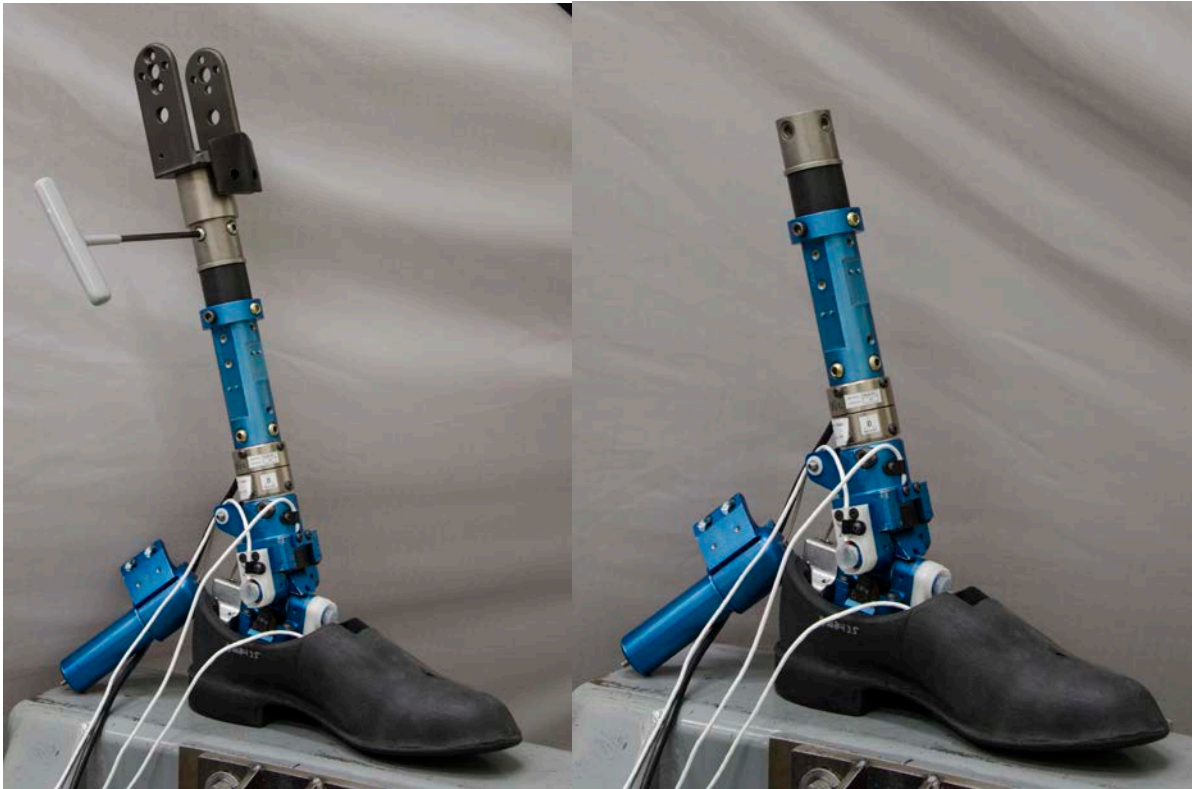


Figure 14-3. Remove knee clevis

- 14.5.4 Install the upper tibia adapter to the leg using four modified M6 BHSS and torque to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf) (Figure 14-4).

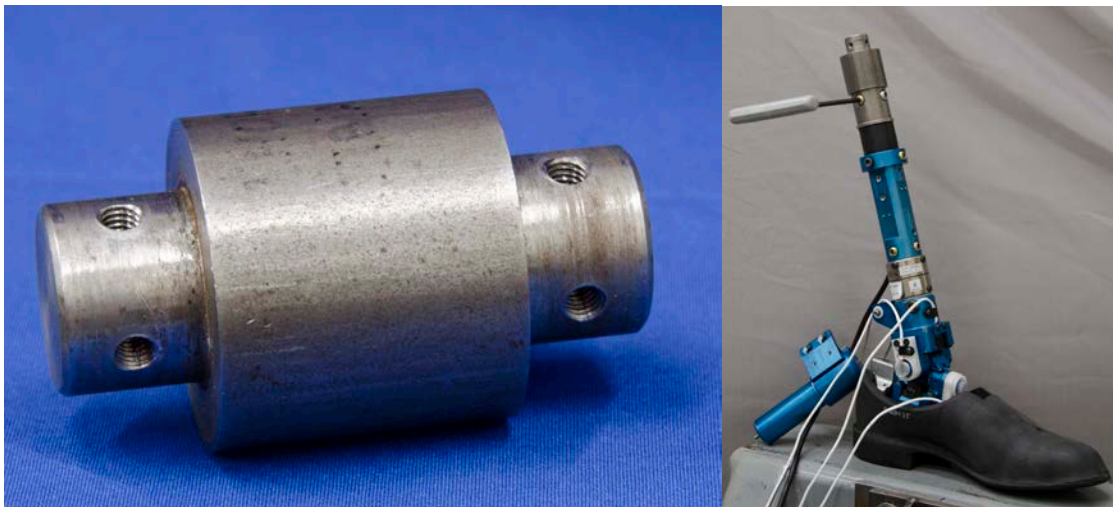


Figure 14-4. Install upper tibia adapter

- 14.5.5 Secure the four M6 x 1 x 12 FHCS (two per side) which attach the Achilles spring tube assembly to the rear of the lower tibia tube.

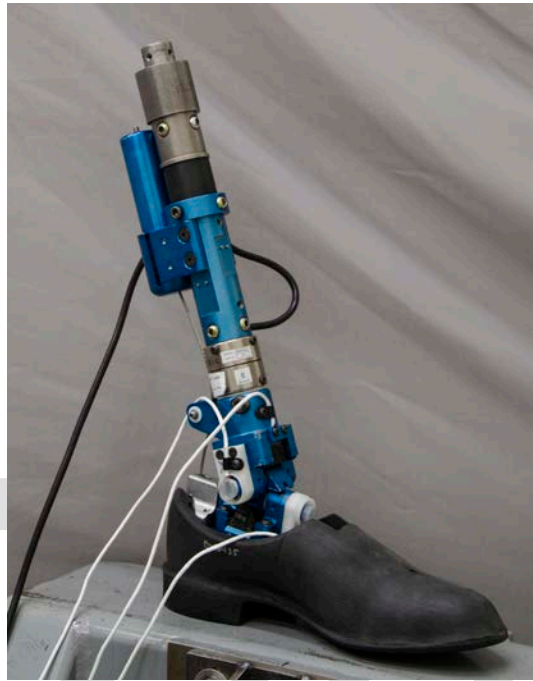


Figure 14-5. Attach Achilles

- 14.5.6 Mount the Lower Leg Mounting Bracket Assembly (472-4100) to a rigid surface (Figure 14-6, APPENDIX A).



Figure 14-6. Install the lower leg mounting bracket

- 14.5.7 Mount the leg with the toe pointing upward (Figure 14-7) by attaching the upper tibia adapter to the lower leg mounting bracket using four modified M6 BHSS and torque to 20.3 ± 2.5 N-m (15.0 ± 1.8 ft-lbf).

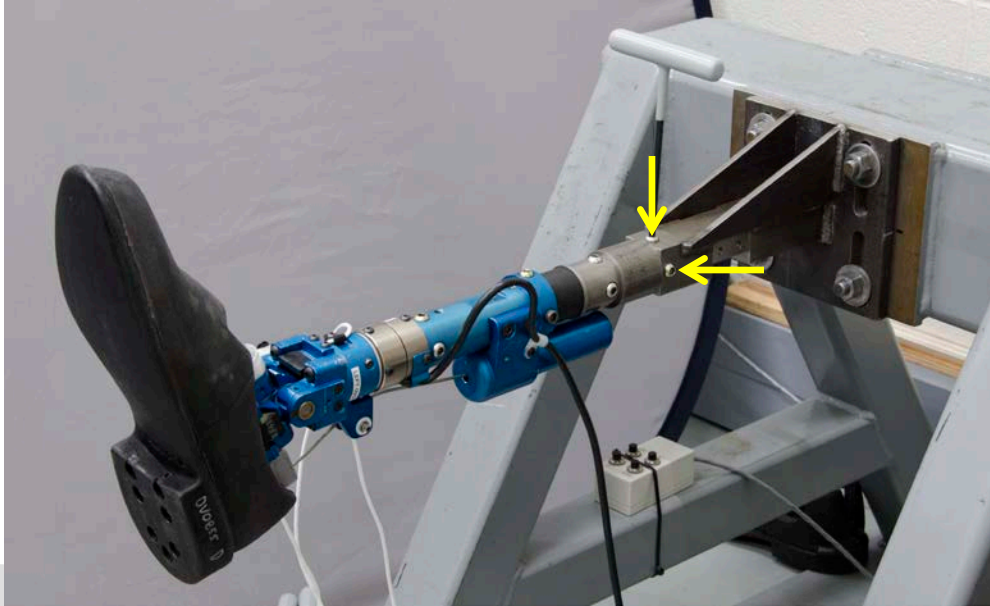


Figure 14-7. Install lower leg to mounting bracket for heel impact test

- 14.5.8 Orient the foot at $0^\circ \pm 0.5^\circ$ dorsiflexion/plantarflexion and inversion/eversion. Use the external positioning bracket (TLX-9000-016M; Figure 12-9) to hold the ankle in the proper orientation (Figure 14-8 and Figure 14-9).

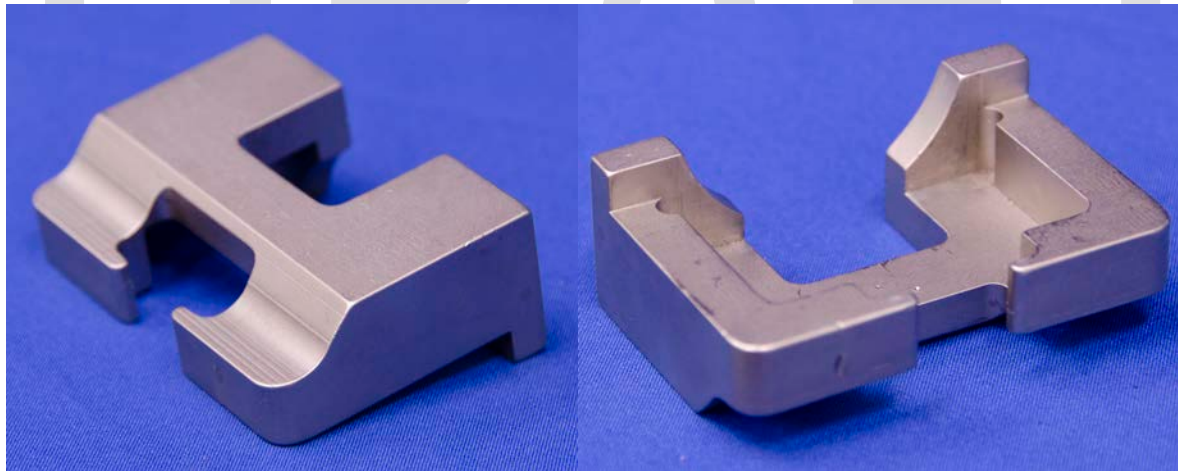


Figure 14-8. External positioning bracket for holding ankle orientation

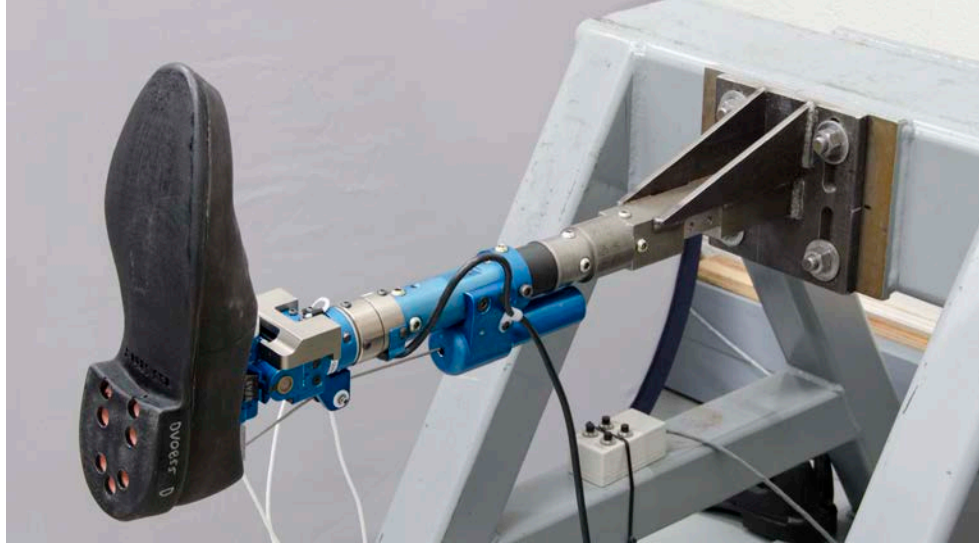


Figure 14-9. Install external positioning bracket for heel impact test

- 14.5.9 Using the zero offset values collected in Section 3.4, position the ankle X axis and Z axis rotations to $0^\circ \pm 0.5^\circ$.
- 14.5.10 Assure that the impactor arm is vertical.
- 14.5.11 Adjust the position of the impactor so that the longitudinal centerline of the pendulum arm is vertical at impact, within $\pm 0.5^\circ$, and the point of impact is aligned with the longitudinal axis of the tibia within ± 2.5 mm (± 0.1 in) (Figure 14-10). The longitudinal axis of the tibia is defined as the horizontal line crossing the centers of the ankle Y-axis pivot point, plunger retaining bolt (472-7335), and the modified BHSC (W50-61042) attaching the tibia compliant bushing assembly to the upper tibia mounting fixture.



Figure 14-10. Alignment of the impactor for heel impact test

- 14.5.12 Record the “as measured (AM)” channels listed in **Table 14-1** (for left impacts) or **Table 14-2** (for right impacts) in accordance with SAE-J211. Determine the time of first contact between the impactor and the ATD using a contact strip, light trap, instrumentation level trigger, or equivalent, and ensure that at least 20 milliseconds of data are recorded before contact.
- 14.5.13 Ensure that at least 30 minutes have passed since the last test on the lower leg.
- 14.5.14 Release the pendulum and allow it to fall freely from a height to achieve an impact velocity of 4.0 ± 0.1 m/s (13.1 ± 0.3 ft/s).
- 14.5.15 Repeat Section 14.5 for the opposite leg.

14.6 Data Processing

- 14.6.1 Remove data channel offset, but do not *zero* the ankle rotational potentiometer; per SAE J211 Section 8.4.3, bring the normalized value of a stable pre-test section of data to the *proper initial value* for the transducer.
- 14.6.2 Filter channels based on the CFC filter classes listed in **Table 14-1** (for left impacts) or **Table 14-2** (for right impacts).

Table 14-1. Required Measurement Channels for the Left Heel Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Left Lower Tibia Axial Force, Z-axis	600	D0TIBILELOTHFOZB	ZL	AM	TBLL	LC	NWT

Table 14-2. Required Measurement Channels for the Right Heel Qualification Test

Channel Description	CFC	ISO-MME Code	AXIS	DASTAT	SENATT	SENTYP	YUNITS
Right Lower Tibia Axial Force, Z-axis	600	D0TIBIRILOTHFOZB	ZL	AM	TBRL	LC	NWT

14.7 Performance Specifications

Table 14-3. Heel Qualification Response Requirements


Parameter	Units	Specification	
		Min.	Max.
Peak Lower Tibia F_z	N	-3477	-2845

DRAFT


APPENDIX A. TEST FIXTURES

Test Fixture Description [± 0.02 kg, ± 0.25 mm]	Reference	Section(s)	Title
Rigid disk impactor 23.36 kg, 152.4 mm diameter disk	CFR Title 49, §572.36(a)	4, 7, 8	Head Qualification, Upper Thorax Qualification, Lower Thorax Qualification
Rigid disk impactor 13.0 kg, 152.4 mm diameter disk	N/A	5	Face Qualification
Neck pendulum	Figure A - 2; CFR Title 49, §572.33(c)3	6.6, 6.7, 6.8, 6.9	Neck Torsion Test, Neck Frontal Flexion Test, Neck Extension Test, Neck Lateral Flexion Test
Neck torsion fixture attached to neck pendulum (see above)	DL472-1000	6.6	Neck Torsion Test
Rigid rectangular bar attached to 23.36 kg, 152.4 mm diameter disk impactor (32.0 kg total mass)	DL472-3000; CFR Title 49, §572.36(a)	9	Abdomen Qualification
Rigid disk impactor 5.0 kg, 76.2 mm diameter disk	N/A	10	Upper Leg Qualification
Rigid disk impactor 12.0 kg, 76.2 mm diameter disk; mounting fixture; load distribution bracket	Mounting fixture: Figure A - 3 Load distribution bracket: DL472-5000	11	Knee Qualification
NHTSA Dynamic Impactor	TLX-9000-013	12, 13, 14	Ankle Inversion and Eversion Qualification, Ball of Foot Qualification, Heel Qualification
Ankle external positioning bracket	TLX-9000-016M	12, 14	Ankle Inversion and Eversion Qualification, Heel Qualification
Dynamic inversion/eversion bracket	TLX-9000-015	12	Ankle Inversion and Eversion Qualification
Lower leg mounting bracket assembly	DL472-4100	12, 13	Ankle Inversion and Eversion Qualification, Ball of Foot Qualification
Lower Leg Zero Bracket	DL472-3500	3.4	Ankle Rotary Potentiometer Zeroing Procedure
Achilles Fixture Complete Assembly	DL472-4000	3.5	Achilles Cable Adjustment Procedure
Load cell mounting assembly	DL472-4200		

A - 1. Summary of test fixtures for THOR-50M Qualification Tests

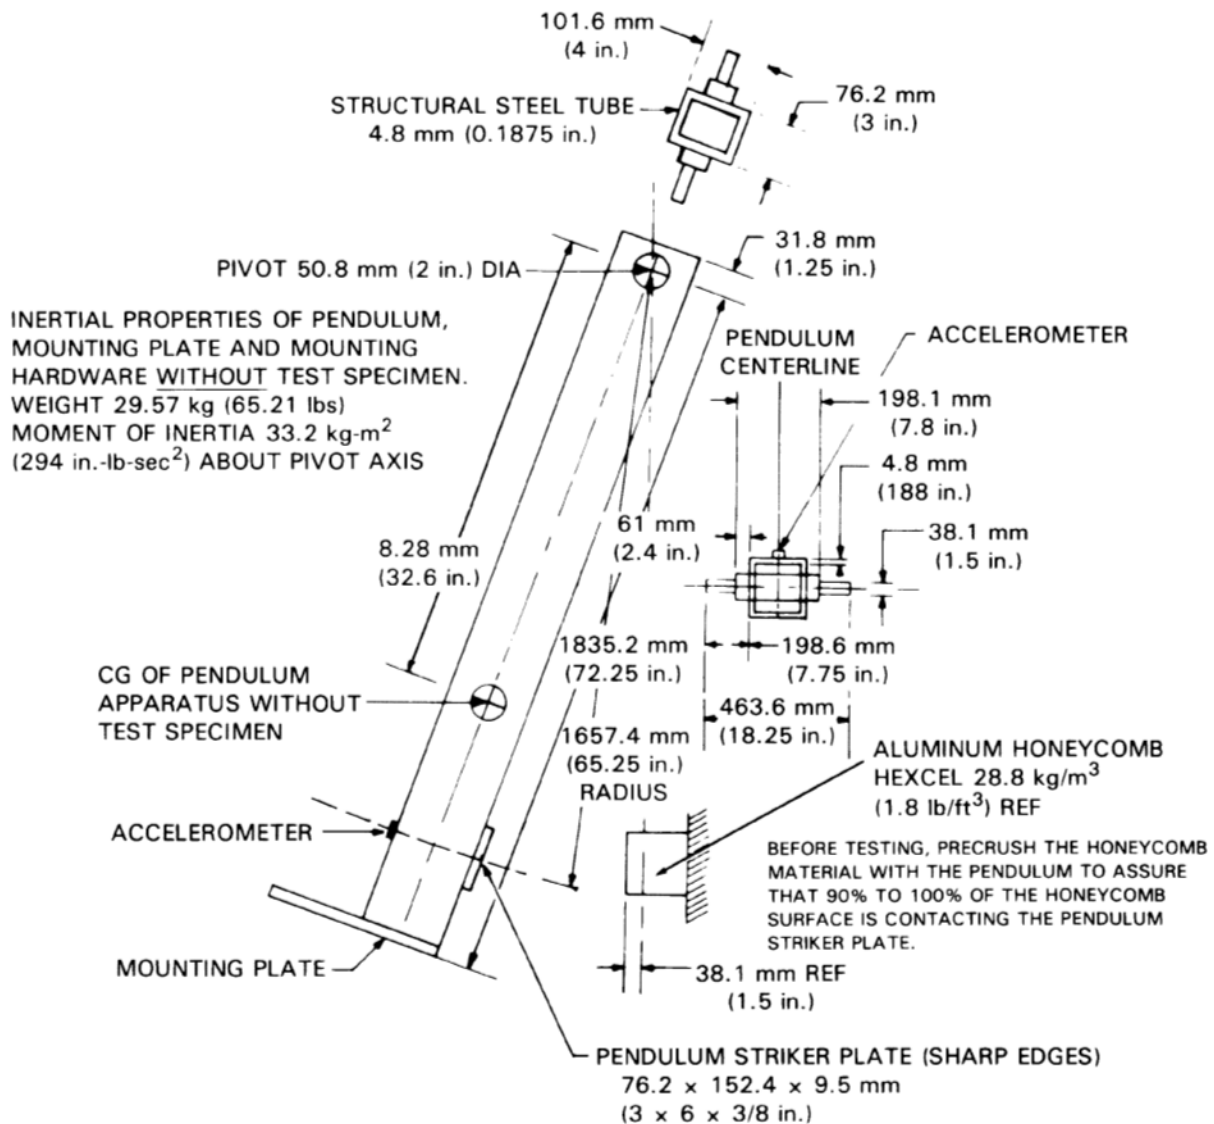


A - 2. Neck pendulum apparatus (CFR Title 49, §572.33(c)3, Figure 22)

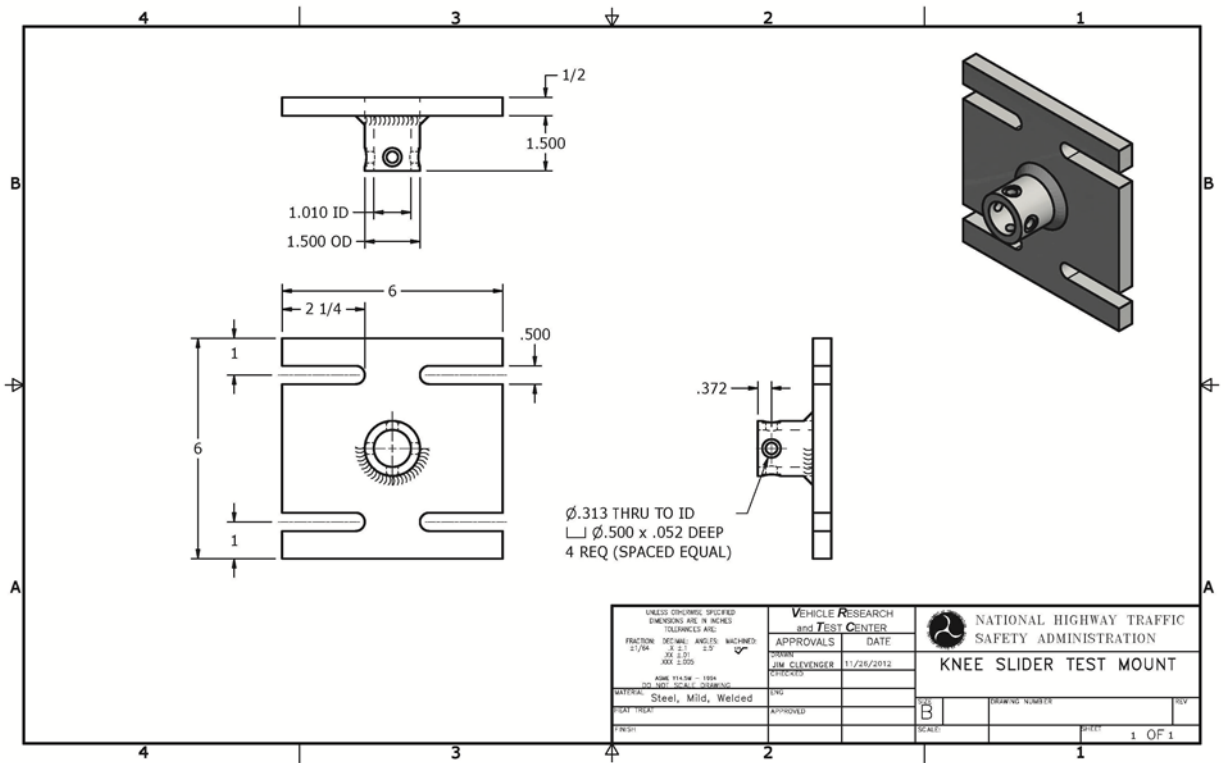




A - 3. Knee Slider Test Mounting Bracket

A - 4. Component of Lower Leg Mounting Bracket Assembly

Part Description	Quantity	Part Number	Item #
Lower Leg Mounting Bracket	1	DL472-4101	1
Leg Mounting Bar	1	DL472-4102	2
Gusset	2	DL472-4103	3

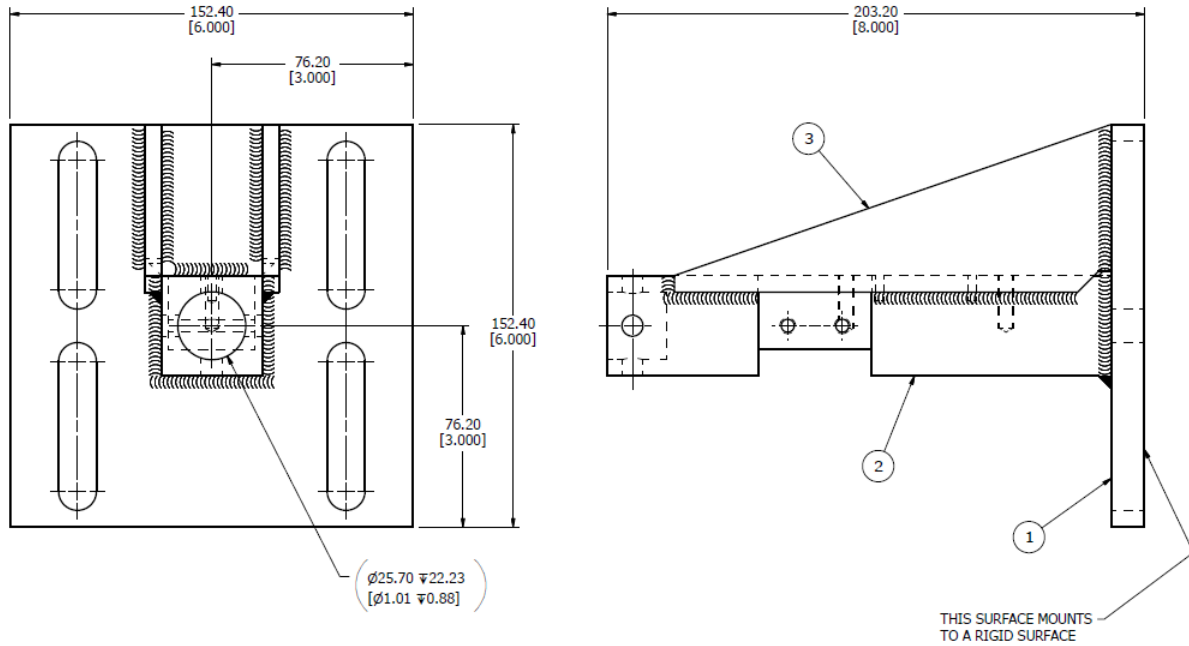


A - 5. Lower leg mounting bracket assembly (DL472-4100)

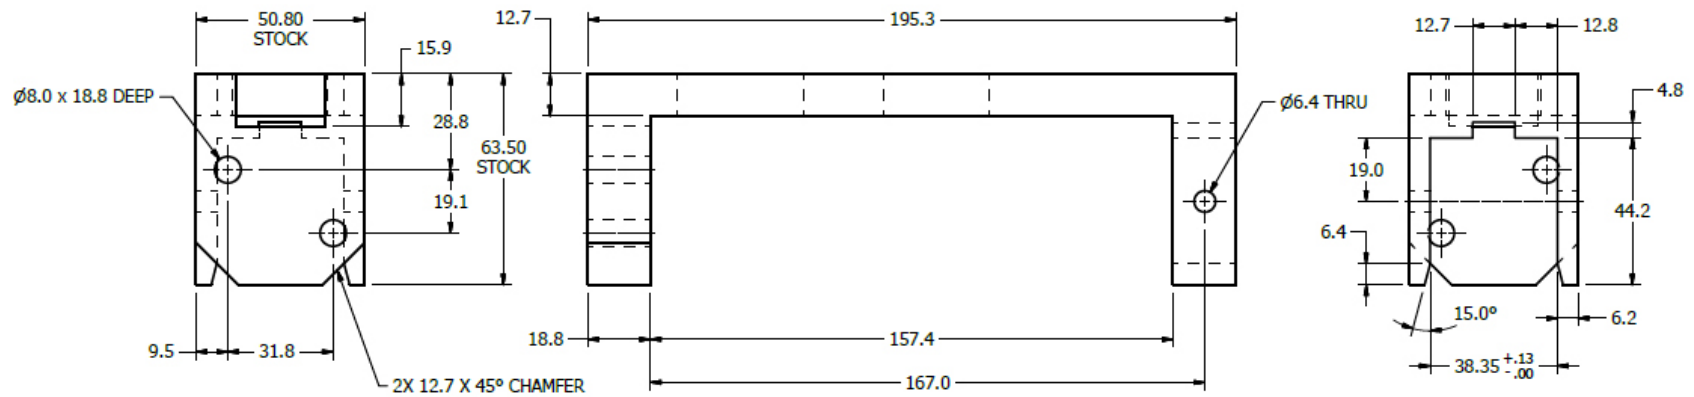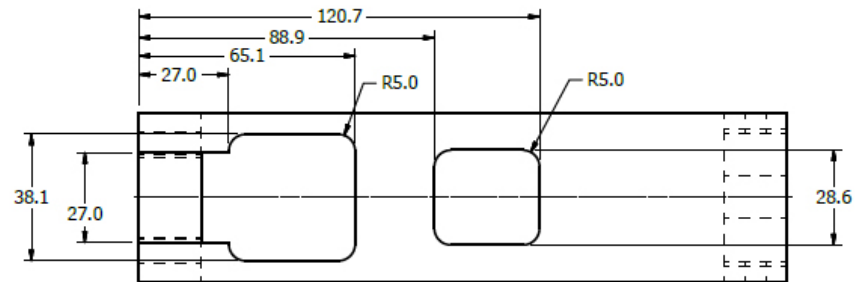

A - 6. Lower leg zero bracket (DL472-3500)

A - 7. Components of Load Cell Mounting Assembly


Part Description	Quantity	Part Number	Item #
Mounting Bracket Assembly	1	DL472-4210	1
Draw Screw	1	DL472-4202	2
Hex Nut 1/4-28	1	9000110	3
Hex Nut, Flanged, 1/4-28	1	9000101V	4
Pull Wire Assembly	1	DL472-4203	5
Thrust Bearing, 1/4" ID	1	5000685V	6
Load Cell, 25# CAP, LCR-25	1	5001500V	7
Eye Bolt-Modified	1	DL472-4204	8

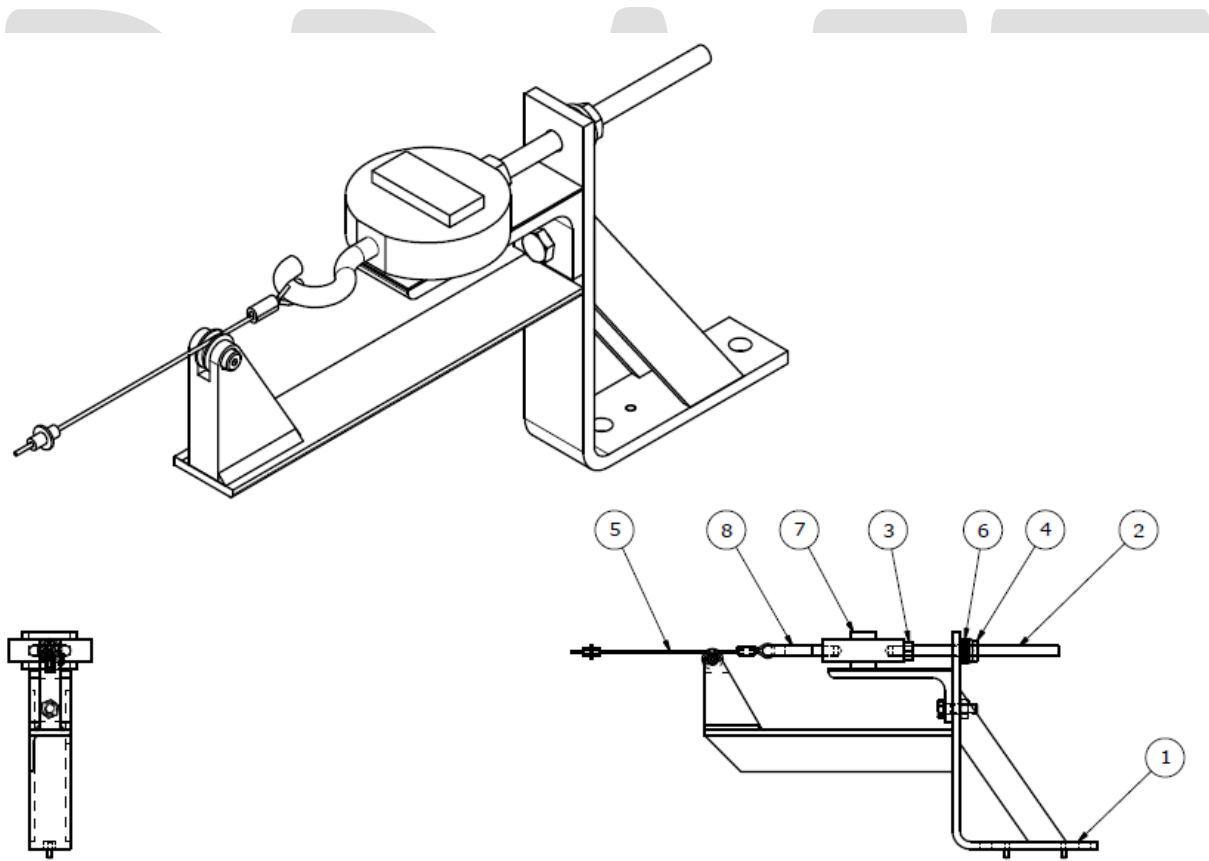

A - 8. Load cell mounting assembly (DL472-4200)

A - 9. Components of Achilles Fixture

Part Description	Quantity	Part Number	Item #
Lower Leg Mounting Bracket Assembly	1	DL472-4100	1
Load Cell Mounting Assembly	1	DL472-4200	2
Flat M6 Washer	2	5000094	3
Screw, Hex HD CAP M6-1 x 20	2	5000567V	4
Modified BHSS M6 Thread	4	W50-61042	5

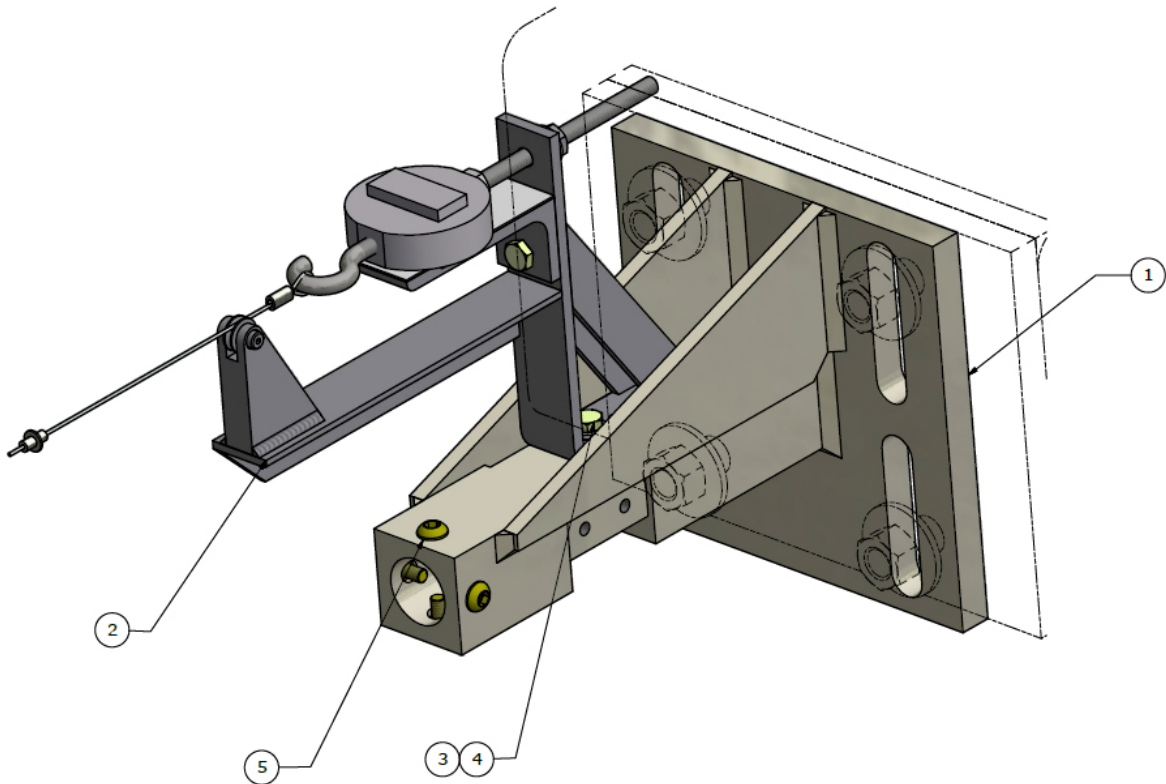

A - 10. Complete Achilles Fixture

APPENDIX B. SOURCE DATA FOR PERFORMANCE REQUIREMENTS

Test Mode	ATD Serial Number	TSTNO Start	TSTNO End	TSTREF Start	TSTREF End
Head	DL9207			DL9207HD1	DL9207HD5
Head	DO9798			DO9798HD1	DO9798HD5
Head	DO9799			DO9799HD1	DO9799HD5
Face	DL9207			DL9207FCDK1	DL9207FCDK5
Face	DO9798			DO9798FCDK1	DO9798FCDK5
Face	DO9799			DO9799FCDK1	DO9799FCDK5
Neck Flexion	DL9207			DL9207NKFLX1	DL9207NKFLX5
Neck Flexion	DO9798			DO9798NKFLX1	DO9798NKFLX5
Neck Flexion	DO9799			DO9799NKFLX1	DO9799NKFLX5
Neck Extension	DL9207			DL9207NKEXT1	DL9207NKEXT5
Neck Extension	DO9798			DO9798NKEXT1	DO9798NKEXT5
Neck Extension	DO9799			DO9799NKEXT1	DO9799NKEXT5
Neck Lateral (Left)	DL9207			DL9207NKLT1	DL9207NKLT5
Neck Lateral (Left)	DO9798			DO9798NKLT1	DO9798NKLT5
Neck Lateral (Left)	DO9799			DO9799NKLT1	DO9799NKLT5
Neck Lateral (Right)	DL9207			DL9207NKRT1	DL9207NKRT5
Neck Lateral (Right)	DO9798			DO9798NKRT1	DO9798NKRT5
Neck Lateral (Right)	DO9799			DO9799NKRT1	DO9799NKRT5
Neck Torsion (Left)	DL9207				
Neck Torsion (Left)	DO9798				
Neck Torsion (Left)	DO9799				
Neck Torsion (Right)	DL9207				
Neck Torsion (Right)	DO9798				
Neck Torsion (Right)	DO9799				
Upper Thorax	DL9207			DL9207THXUP1	DL9207THXUP5
Upper Thorax	DO9798			DO9798THXUP1	DO9798THXUP5
Upper Thorax	DO9799			DO9799THXUP1	DO9799THXUP5
Lower Thorax (Left)	DL9207			DL9207THXLWLT1	DL9207THXLWLT5
Lower Thorax (Left)	DO9798			DO9798THXLWLT1	DO9798THXLWLT5
Lower Thorax (Left)	DO9799			DO9799THXLWLT1	DO9799THXLWLT5
Lower Thorax (Right)	DL9207			DL9207THXLWRT1	DL9207THXLWRT5
Lower Thorax (Right)	DO9798			DO9798THXLWRT1	DO9798THXLWRT5
Lower Thorax (Right)	DO9799			DO9799THXLWRT1	DO9799THXLWRT5
Abdomen	DL9207			DL9207ABLO1	DL9207ABLO5
Abdomen	DO9798			DO9798ABLO1	DO9798ABLO5
Abdomen	DO9799			DO9799ABLO6	DO9799ABLO10
Upper Leg (Left)	DL9207			DL9207FEMLT1	DL9207FEMLT5
Upper Leg (Left)	DO9798			DO9798FEMLT1	DO9798FEMLT5
Upper Leg (Left)	DO9799			DO9799FEMLT1	DO9799FEMLT5

Upper Leg (Right)	DL9207	DL9207FEMRT1	DL9207FEMRT5
Upper Leg (Right)	DO9798	DO9798FEMRT1	DO9798FEMRT5
Upper Leg (Right)	DO9799	DO9799FEMRT1	DO9799FEMRT5
Knee (Left)	DL9207	DL9207KNSLLT1	DL9207KNSLLT5
Knee (Left)	DO9798	DO9798KNSLLT1	DO9798KNSLLT5
Knee (Left)	DO9799	DO9799KNSLLT1	DO9799KNSLLT5
Knee (Right)	DL9207	DL9207KNSLRT1	DL9207KNSLRT5
Knee (Right)	DO9798	DO9798KNSLRT1	DO9798KNSLRT5
Knee (Right)	DO9799	DO9799KNSLRT1	DO9799KNSLRT5
Ankle Inversion (Left)	DL9207		
Ankle Inversion (Left)	DO9798		
Ankle Inversion (Left)	DO9799		
Ankle Inversion (Right)	DL9207		
Ankle Inversion (Right)	DO9798		
Ankle Inversion (Right)	DO9799		
Ankle Eversion (Left)	DL9207		
Ankle Eversion (Left)	DO9798		
Ankle Eversion (Left)	DO9799		
Ankle Eversion (Right)	DL9207		
Ankle Eversion (Right)	DO9798		
Ankle Eversion (Right)	DO9799		
Ball of Foot (Left)	DL9207		
Ball of Foot (Left)	DO9798		
Ball of Foot (Left)	DO9799		
Ball of Foot (Right)	DL9207		
Ball of Foot (Right)	DO9798		
Ball of Foot (Right)	DO9799		
Heel (Left)	DL9207		
Heel (Left)	DO9798		
Heel (Left)	DO9799		
Heel (Right)	DL9207		
Heel (Right)	DO9798		
Heel (Right)	DO9799		

APPENDIX C. CHANGE LOG

Date	Description
2015-08-31	Pre-release for initial review
2015-09-10	Updated neck torsion measurement channels and data processing to use rotational potentiometer installed on fixture for rotation and rotation delay requirements, adjusted wording on Achilles and ankle procedures to allow more flexibility in test procedure, fixed some ISO-MME codes and Entrée fields in instrumentation requirements, applied minor adjustments to draft specifications upon further review of data, fixed minor grammatical errors
2015-09-18	Fixed several ISO-MME codes (neck cables, CHRI → CHST, lower abdomen) to align with 2015-04-15 codes; clarified upper thorax and abdomen procedures to define difference between left and right as the difference between the peaks, not the peak of the difference between the time-histories.
2015-10-16	Changed abdomen qualification test velocity to 3.3 m/s and adjusted specs accordingly (this change was made to reduce the risk of damaging IR-TRACCs or abdomen components during qualification testing); added note instructing users not to filter IR-TRACC voltage until after it is linearized and scaled; clarified head skin treatment in Step 5.5.1; removed images of fixture drawings that are now included in the THOR-50M Drawing Package (see http://www.nhtsa.gov/Research/Biomechanics+&+Trauma/THOR+50th+Male+ATD)
2015-12-01	Updated calculation of head angle wrt pendulum in neck pendulum qualification tests
August 2016 version - Docket # NHTSA-2015-0119	Changed abdomen impactor edge radius from 12.7mm to 6.0mm; fixed several typos in ankle qualification test procedure; updated 3.4Ankle Rotary Potentiometer Zeroing Procedure; added drawings for leg zero bracket, Achilles tension bracket, leg mounting bracket to Appendix; updated Achilles tension procedure; ball of foot procedures updated; inversion/eversion procedures updated; heel Impact procedures updated; updated neck spring cable setup